


Evaluation Report 263



Bee 8022 Electronic Fence Controller

A Co-operative Program Between

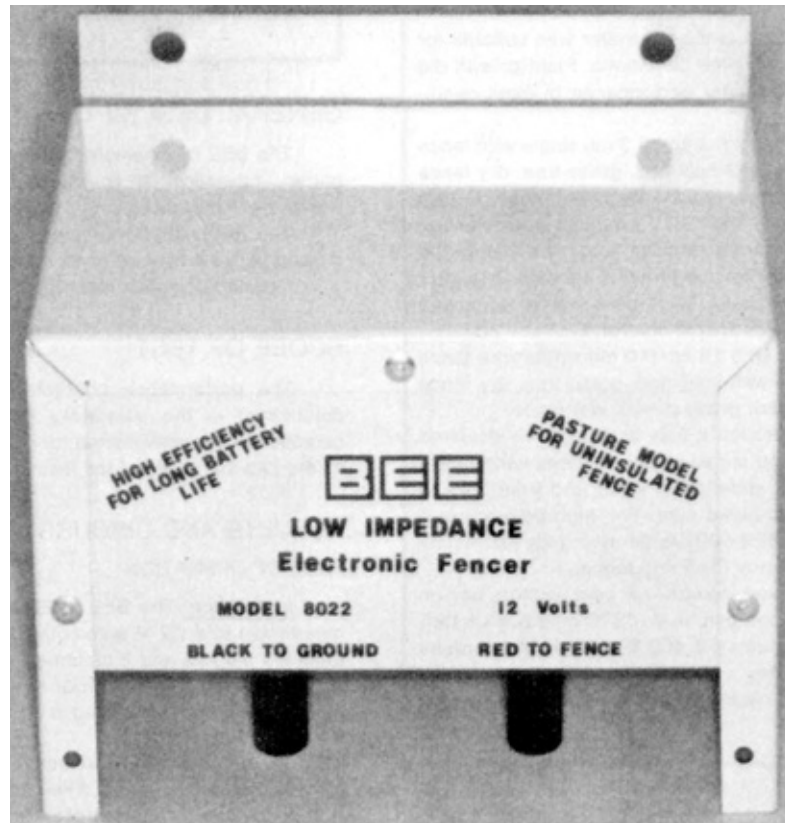

BEE 8022 ELECTRIC FENCE CONTROLLER

MANUFACTURER:

Baker Engineering Enterprises Ltd.
9620 - 27 Avenue
Edmonton, Alberta

RETAIL PRICE:

\$95.00 (December, 1981, f.o.b. Humboldt)

DISTRIBUTOR:

Alpec Merchant Corporation
-- 9620 - 27 Avenue
Edmonton, Alberta
T6N 1B2
-- 1342 Fleet Street
Regina, Saskatchewan
S4N 5R5
-- P.O. Box 97
Alexander, Manitoba
R0K 0A0

SUMMARY AND CONCLUSIONS

The BEE 8022 electric fence controller was suitable for use over a limited range of fence conditions. Plant growth did not appreciably affect controller performance in most conditions.

Peak voltage output on a 5.4 km (3.3 mi) single wire fence varied from 1920 V for a well-insulated, grass-free, dry fence to 1410 V for an uninsulated, grass-grown, wet fence. Output for all conditions, was above the 700 V minimum guard voltage recommended for short-haired animals, but was below the 2000 V minimum needed for long-haired animals. A higher peak voltage output could be expected on a shorter fence and would ensure more effective animal control.

Peak voltage output on a 16 km (10 mi) single wire fence varied from 1050 V for a well-insulated, grass-free, dry fence to 850 V for an uninsulated, grass-grown, wet fence.

Peak current flow through a cow touching well-insulated 5.4 and 16 km (3.3 and 10 mi) single wire fences varied from 2.79 to 1.73 A for a cow standing in water and from 0.49 to 0.27 A for a normally-grounded cow. The high peak current output indicated that the BEE 8022 generated quite an intense shock on fairly long or poorly insulated fences.

The BEE 8022 was very suitable for cold weather use on feeding fences. Peak voltage output at -35°C on a 5.4 km (3.3 mi) single wire fence was about 2400 V, 25% higher than its output at room temperature.

No durability problems occurred during testing.

NOTE: This report has been prepared using SI units of measurement. A conversion table is given in APPENDIX II.

GENERAL DESCRIPTION

The BEE 8022 electric fence controller is designed for 12 V battery operation. It is meant to be mounted in a suitable weather-proof enclosure.

The BEE 8022 contains solid-state electronics, with no moving parts. It may be used on fences without insulators.

Detailed specifications are given in APPENDIX I.

SCOPE OF TEST

The performance characteristics of the BEE 8022 were determined in the laboratory for a range of simulated fence conditions.* It was evaluated for ease of operation, quality of work, safety and suitability of the instruction manual.

RESULTS AND DISCUSSION

EASE OF OPERATION

Installation: The BEE 8022 is equipped with wire leads for connection to a 12 V automotive battery. The controller is to be mounted indoors and if mounted outdoors, it should be placed in an appropriate weather-proof shelter. The manufacturer recommends that it not be installed in a barn with a damp or corrosive atmosphere.

The controller is connected to the fence with a length of insulated wire. In addition, a suitable ground rod has to be installed and connected to the controller. Depending on ground conditions, a ground rod up to 3 m (10 ft) long may be needed.

Fence Condition: The manufacturer states that the BEE 8022 may be used on fences without wire insulators. The wire can be stapled directly to wooden posts, but should not be directly attached to live trees, green posts, salt-treated wooden posts or steel posts. If the fence is in good repair, the controller is designed to operate effectively with a certain amount of plant growth touching the charged wire.

The manufacturer recommends that for cattle fences, in areas with normal ground conditions, a single charged wire provides a suitable fence. For very dry or frozen soil, which provide poor ground conditions, a two-wire fence, with one charged wire and one ground wire, may be necessary.

Operation: The BEE 8022 does not have an indicator light to show that the fence is properly charged.

An optional portable fence tester is available with the BEE 8022 for locating short circuits in fences.

RECOMMENDATIONS

A need for recommendations was not apparent.

Chief Engineer -- E. O. Nyborg

Senior Engineer -- G. E. Frehlich

Project Technologist -- G. G. Burton

THE MANUFACTURER STATES THAT

The BEE 8022 is primarily designed for charging short fences for feedlots, strip grazing and acreages. It is not recommended for charging more than 1.6 km (1 mi) of fence. The model 8022 has been repackaged in an ABS enclosure.

*PAMI T7850, Detailed Test Procedures for Electric Fence Controllers.

QUALITY OF WORK

General: Operation of an electric fence controller is quite complex. To be effective, an electric fence has to deliver a minimum guard voltage to overcome the insulation resistance of the hide and hair of an animal. In addition, once the insulation resistance of the animal is overcome, the controller must deliver a pulse of electrical energy to the animal to create a shock. The amount of energy (charge) delivered is related to the current flow and its duration. If too much energy is delivered, the fence will be hazardous to both animals and humans while if not enough energy is delivered, animal control will be ineffective.

Little is known about the physiological effect of shock pulses on animals. In general, the following guidelines are used in assessing fencer performance: the minimum guard voltage needed to overcome animal insulation resistance should be at least 2000 V for sheep and for long-haired cattle, such as Herefords or Charolais. For shorter haired animals, such as most dairy cows, a minimum guard voltage of 700 V is sufficient. The shape of the current pulse affects what the animal feels when it touches an electrical fence, but little reliable information is available. It has been found that shock intensity is more related to the peak current value in a pulse than to the total value of the electrical charge.

Fence conditions determine the guard voltage produced by a fence controller and limit the amount of charge which a controller is capable of delivering to an animal. The insulation resistance of a 1.6 km (1 mi) single wire fence typically varied from about 1 k Ω for an uninsulated, grass-grown, wet fence to well above 500 k Ω for a well-insulated, grass-free, dry fence. The higher the fence insulation resistance, the greater is the length of fence on which a controller can be effectively used. To receive a shock from a single wire electrified fence, an animal must be sufficiently grounded to permit current to flow from the fence, through the animal. Typical electrical resistances of cattle vary from about 0.5 k Ω for a cow standing in water and licking a charged wire to about 4 k Ω for typical ground conditions. If ground conditions are too poor, animal resistance to ground is so great that no shock occurs.

Peak Voltage Output: FIGURES 1 and 2 show peak voltage outputs of the BEE 8022 for a 5.4 and 16 km (3.3 and 10 mi) lengths of single wire fence over a range of insulation resistances. On a 5.4 km (3.3 mi) fence (FIGURE 1), peak voltage output varied from 1920 V for a well-insulated, grass-free, dry fence to 1410 V for an uninsulated, wet fence with considerable grass touching the charged wire. The voltage output for all fence conditions, was below the 2000 V minimum guard voltage needed for long-haired animals, but was above the 700 V minimum required for short-haired animals.

On a 16 km (10 mi) fence (FIGURE 2), peak voltage output ranged from 1050 V for a well-insulated, grass-free, dry fence to 850 V for an uninsulated, grass-grown, wet fence. Voltage output was below the 2000 V minimum required for long-haired animals, but was above the 700 V minimum required for short-haired animals, for all fence conditions.

As can be seen from both FIGURES 1 and 2, plant growth touching a fence did not appreciably affect controller performance. The BEE 8022 should generate a higher peak voltage output and provide more effective animal control on shorter fences.

Electrical Charge: FIGURES 3 to 6 show the current output of the BEE 8022 when a cow touches 5.4 and 16 km (3.3 and 10 mi) lengths of well-insulated, single wire, fence. FIGURES 3 and 4 are for an animal resistance of 0.5 k Ω , which represent the most extreme condition of a cow standing in water and licking the charged wire, while FIGURES 5 and 6 are for an animal resistance of 4 k Ω , representing more normal ground conditions. The shock intensity is related to the peak current in the pulse. The higher the peak current, the more intense will be the shock.

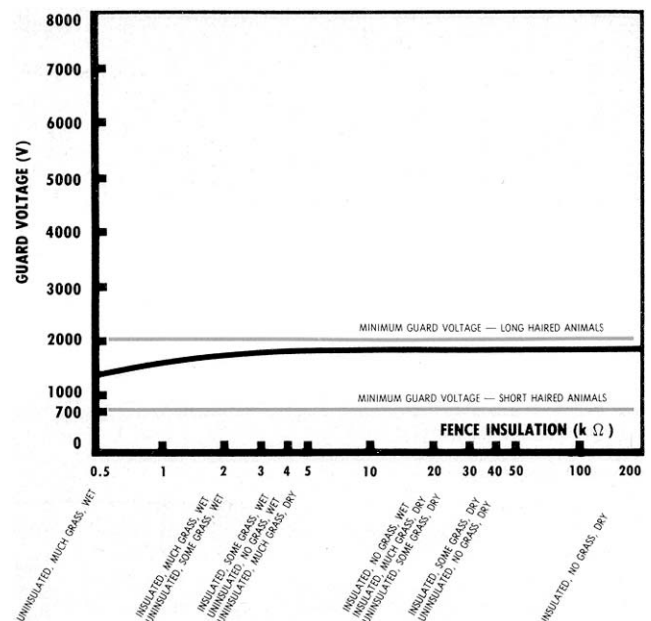


FIGURE 1. Guard Voltage Produced on a 5.4 km Single Wire Fence.

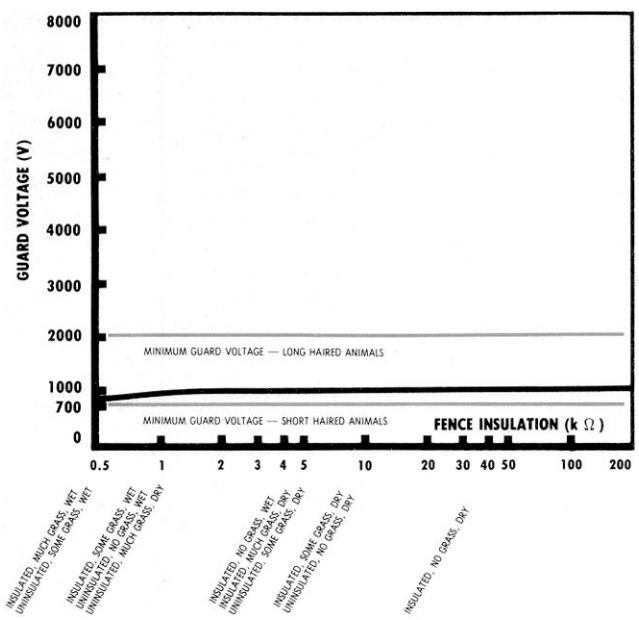


FIGURE 2. Guard Voltage Produced on a 16 km Single Wire Fence.

The peak current delivered by the BEE 8022 varied from 2.79 A for a well-grounded cow touching the 5.4 km (3.3 mi) fence to 0.27 A for a normally-grounded cow touching the 16 km (10 mi) fence. The BEE 8022 gave an intense shock on fairly long or poorly insulated fences.

About 53 charge pulses per minute were delivered. The number of pulses did not vary with fencer load, however, the on-time was affected by load. On-time varied from about 0.05 to 2.0 ms.

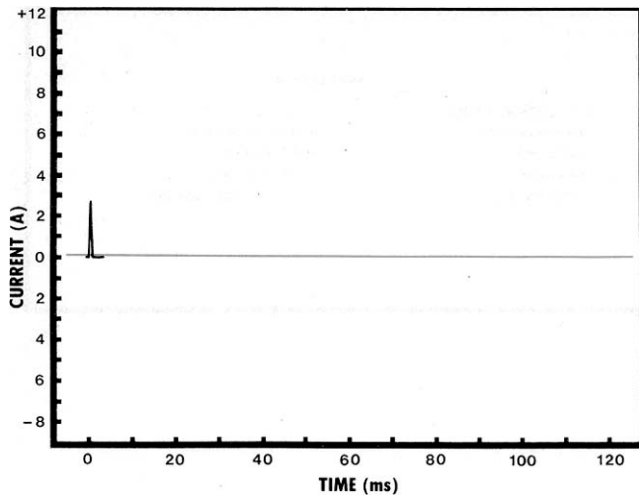


FIGURE 3. Current Delivered to a Well-Grounded Cow Touching a 5.4 km Well-Insulated Fence.

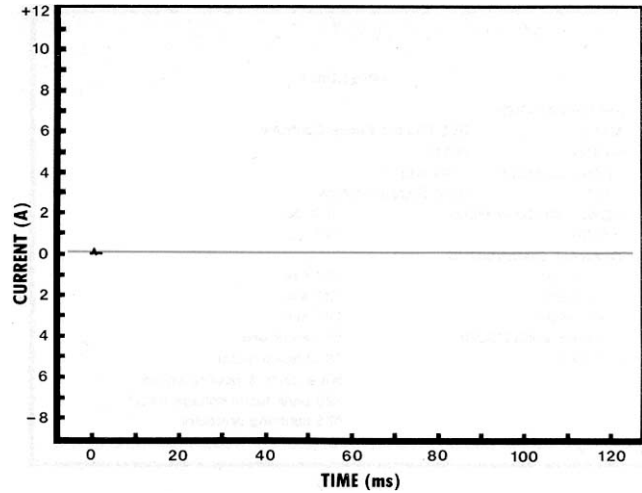


FIGURE 6. Current Delivered to a Normally-Grounded Cow Touching a 16 km Well-Insulated Fence.

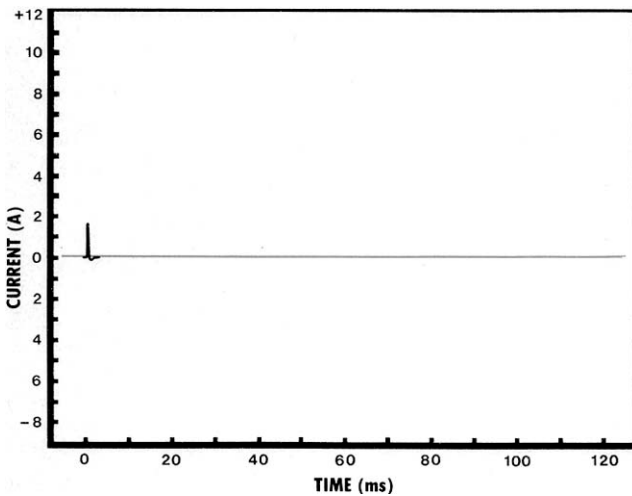


FIGURE 4. Current Delivered to a Well-Grounded Cow Touching a 16 km Well-Insulated Fence.

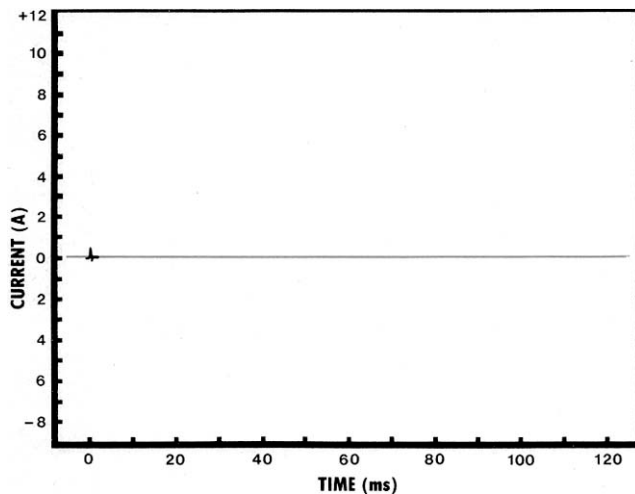


FIGURE 5. Current Delivered to a Normally-Grounded Cow Touching a 5.4 km Well-Insulated Fence.

Low Temperature Operation: The BEE 8022 could effectively be used to energize cattle feeding wires during low winter temperatures. The peak voltage output of the controller at -35°C on a 5.4 km (3.3 mi) single wire fence was about 2400 V, 25% higher than its output at room temperature. Since the peak voltage output was above the 2000 V minimum required to overcome the insulation resistance of long-haired animals, the BEE 8022 was very suitable for feeding enclosures.

Since battery voltage is severely reduced at low temperatures, it may be necessary to provide a heated battery enclosure to ensure effective winter operation. As frozen ground is often a very poor electrical conductor, two-wire systems, utilizing a separate ground wire, are usually most suitable for winter cattle feeding.

Battery Consumption: A 12 V, 70 amp-hour battery will operate the BEE 8022 about fourteen weeks depending upon the naturally-occurring discharge rate. The consumption rate did not increase as the load on the controller increased. The battery should be regularly checked to ensure effective controller performance.

SAFETY

The instruction manual clearly outlined safety considerations. No safety problems were evident if the manufacturer's instructions were followed.

INSTRUCTION MANUAL

The instruction manual was clear, concise and well illustrated. It outlined installation, safety considerations and operation, as well as suitable fence configurations.

DURABILITY RESULTS

The intent of the test was functional evaluation. An extended durability evaluation was not conducted. No problems occurred during functional testing.

APPENDIX I

SPECIFICATIONS

MAKE: BEE Electric Fence Controller
MODEL: 8066
SERIAL NUMBER: 1161 BEE
TYPE: Solid State Electronic
POWER REQUIREMENTS: 12 V DC
WEIGHT: 0.85 kg
OVERALL DIMENSIONS:
-- length 143 mm
-- width 122 mm
-- height 122 mm
TYPE OF ENCLOSURE: for indoor use
OPTIONS:
7610 fence tester
8004 cattle & poultry trainer
820 peak fence voltage meter
875 lightning protector

APPENDIX II

CONVERSION TABLE

1 millimetre (mm)	= 0.04 inches (in)
1 metre (m)	= 3.3 feet (ft)
1 kilometre (km)	= 0.6 mile (mi)
1 kilogram (kg)	= 2.2 pounds mass (lb)



**ALBERTA
FARM
MACHINERY
RESEARCH
CENTRE**

3000 College Drive South
Lethbridge, Alberta, Canada T1K 1L6
Telephone: (403) 329-1212
FAX: (403) 329-5562
<http://www.agric.gov.ab.ca/navigation/engineering/afmrc/index.html>

Prairie Agricultural Machinery Institute

Head Office: P.O. Box 1900, Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-2555

Test Stations:
P.O. Box 1060
Portage la Prairie, Manitoba, Canada R1N 3C5
Telephone: (204) 239-5445
Fax: (204) 239-7124

P.O. Box 1150
Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-5033
Fax: (306) 682-5080