
BILL OF MISCELLANEOUS METAL

MK. NO.	QTY. REQ'D.	DESCRIPTION	SIZE	
1	1	ANCHOR BOLT	29 (1 1/8") DIA. x 1650	G40.21-M-300W GALV. FULL LENGTH
2	2	HALF NUTS	29 (1 // ₈ ") DIA.	ASTM A194 GRADE 2H

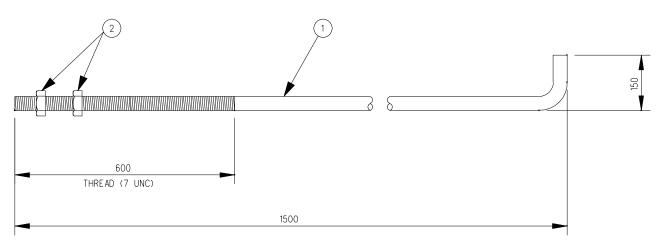


ANCHOR BOLT ASSEMBLY MK. AB1 (STOCK CODE NO. 7558)

NOTES:

- 1. ANCHOR BOLTS SHALL BE SOLID ROUNDS G40.21-M-300W.
- 2. ALL PARTS OF ANCHOR BOLT ASSEMBLY SHALL BE HOT DIP GALVANIZED (FULL LENGTH) IN ACCORDANCE WITH C.S.A. STANDARD G164 WITH NET RETENTION OF 600 g/m. 2
- 3. ALL NUTS SHALL BE TAPPED OVERSIZE.
- 4. ALL NUTS AND WASHERS SHALL BE ASSEMBLED BY THE SUPPLIER PRIOR TO DELIVERY.





98-5973-02

TRAFFIC SIGNAL AND PEDESTRIAN CORRIDOR STRUCTURES	Manitoba Highways and Transportation Traffic Engineering Branch	ACCEPTED BY: TRAFFIC OPERATIONS ENGINEER DATE APPROVED BY:
29 mm (1 1/8") DIA.	PROJECT ENGINEER:	DIRECTOR OF DATE
ANCHOR BOLT AB1	BY: N.B.G. TRACED: N.B.G. CHECKED: S.S.R.	SCALE: COMPONENT NO. <u>AB1</u> SHEET No AB1