## Manitoba Transportation and **Government Services Traffic Engineering**

## WORK ZONE TRAFFIC CONTROL MANUAL

ROADSIDE WORK AND SHOULDER WORK ON A TWO-LANE ROAD

THIS LAYOUT APPLIES TO: LONG DURATION WORK REFER TO POLICY

900-E-2

## **ENCROACHMENT IN RIGHT LANE**

S(km/h)	A(m)	L(m)	B(m)	D(m)
50	50	60	35	15
60	50	90	45	15
70	75	120	50	15
80	100	175	55	15
90	100	200	65	20
100	150	250	70	20

## WHERE:


S = SPEED LIMIT

A = SPACING BETWEEN SIGNS

L = LENGTH OF TAPER

**B** = LENGTH OF LONGITUDINAL BUFFER SPACE

D = SPACING BETWEEN DELINEATION DEVICES

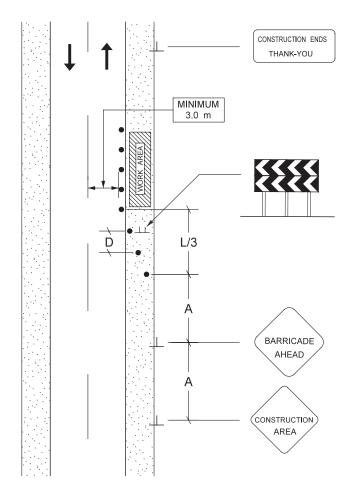

DATE OF ISSUE: 1997-12; REVISED: 2002-02

PATH: TESIGNS/Te-020.dgn

APPROVED:

TMP-7