

How to Use this Manual

Quality Farm Dugouts contains nine modules including a number of worksheets that complement the text and add a very practical element to the manual's use. There is a pocket behind the rear cover, which stores the blank worksheets and other important documents, such as completed estimates, record forms, and personal contacts. Although certain topics will be of more interest and value than others, we recommend that you start with Module 1 and work through the manual systematically.

Features of the Manual

Sidebars

Sidebars are denotations contained in boxes located in the narrow columns on each page, and contain specialized and important comments, considerations, and reminders.

Worksheets and Maintenance Schedules

A number of blank worksheets and maintenance schedules are included in the pocket at the rear of the manual. These forms enable you to calculate and collect important information to use in planning, designing, constructing, and operating a dugout, water system. Examples of the use of each of the worksheets and schedules are included within the text.

Prompts

Prompts are symbols that act as directives to carry out or avoid certain actions or practices.



Recommended practice or action.



Not recommended practice or action.



Remember!



Key concept, practice, or issue.



Dangerous practice, action, or issue!




Practice, action, or issue that requires caution!



Worksheet, exercise, or activity.

History

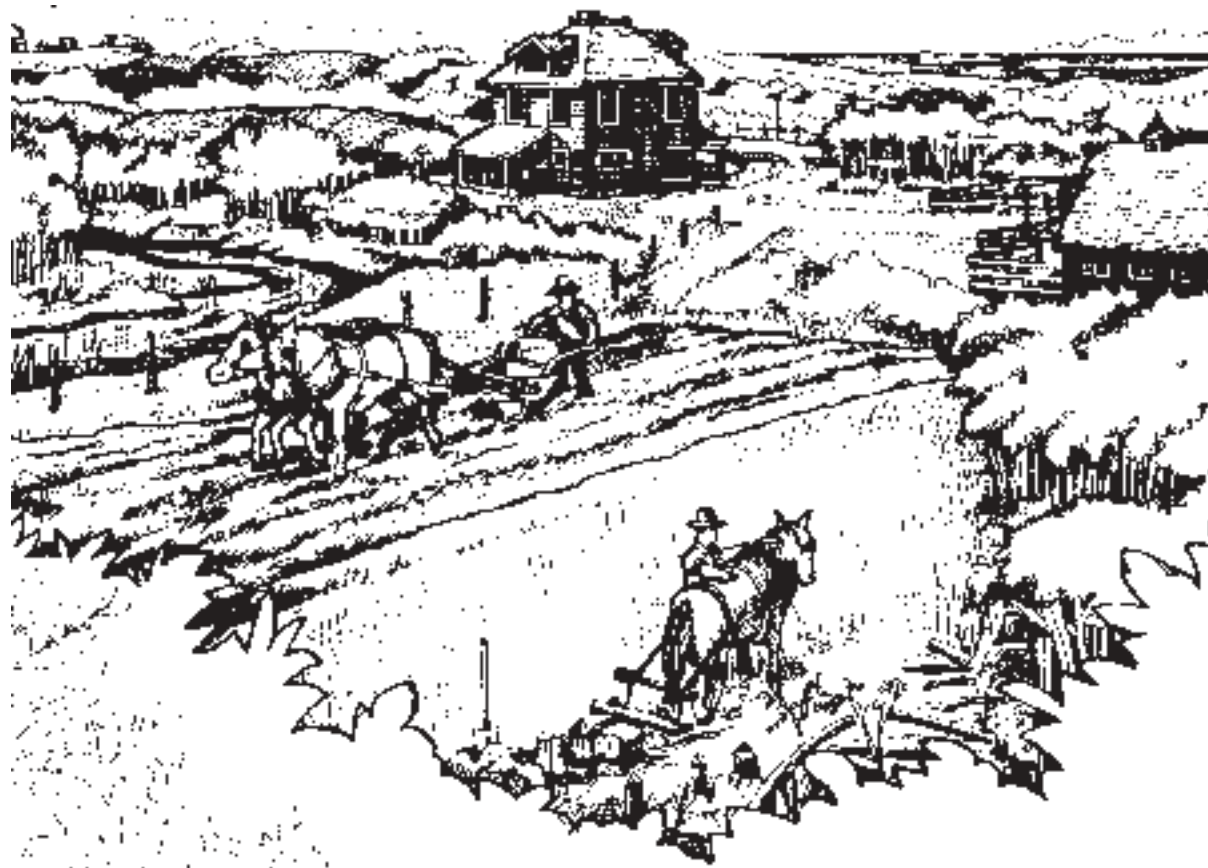

Farm dugouts on the Canadian Prairies have been used as small, water storage reservoirs for many years. In areas where groundwater is either unavailable or of very poor quality, impounding surface runoff is often the only means of ensuring a continuous water supply. For the most part, dugouts capture the temporary surplus of surface water that occurs during snowmelt in the spring. Water may also be collected as runoff from summer rains, but it is typically of very low quality. In order to guarantee reliability of supply, storage capacity must be sufficient to compensate for years of insufficient runoff, summer losses due to evaporation, and winter losses due to ice formation.

During the drought of the 1930's, PFRA helped establish design standards for dugouts to make them a more reliable source of water. They also began offering financial incentives to producers who constructed dugouts according to prescribed design standards. Since the 1930's, PFRA and other government agencies have continued to improve the basic design of the farm dugout. More than 250,000 dugouts have been constructed on the Prairies over the last 100 years.

Figure 1 Horse-Drawn Excavation



Today, many farm operations have several choices for obtaining water supplies. Some now even have access to pressurized and treated water through rural water pipelines. Despite these advances, dugouts continue to be an important part of many farm water systems.


Dugouts are an important water source on the Canadian Prairies for a wide range of uses including:

- Irrigation
- Greenhouse production
- Pesticide spray mixing
- Livestock watering
- Aquaculture
- Household water supplies
- Human drinking water
- Fire fighting

Different dugout uses demand different levels of water quantity and quality, and in large part, determine the size, shape, location, and the type of management required.

Over the years, several agencies in all three Prairie Provinces have provided information and management advice to owners of dugouts. This information has been periodically updated as the result of fifty years of ongoing research. The provision of current dugout knowledge and management practices to dugout users helps to ensure that water is not a limiting factor in economic success or quality of rural life.

Understanding Prairie Dugouts

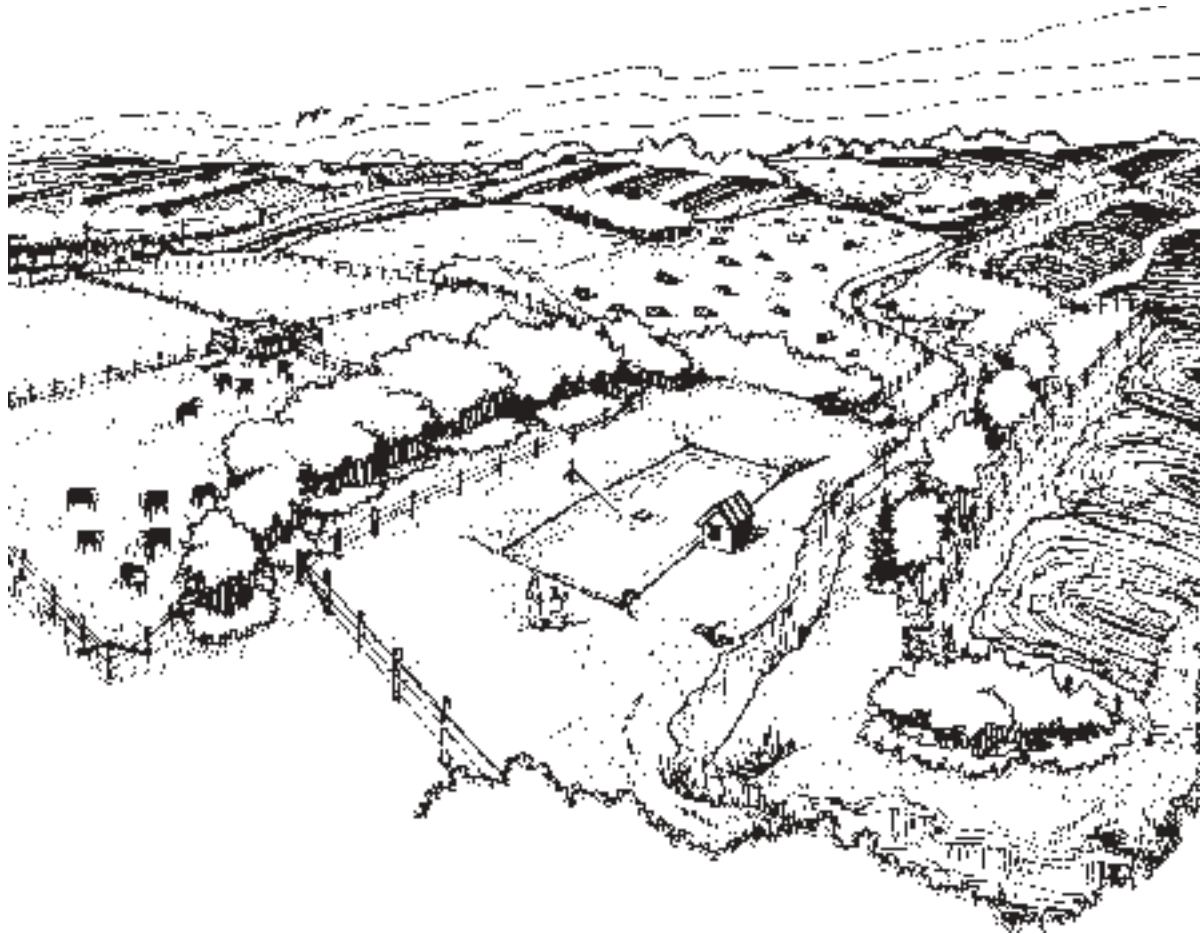

It is much easier to design, operate, and maintain high quality dugouts if the natural processes that control them are understood. This module explains some of these processes. Climate and landscape determine how much runoff will be captured by a dugout. Once the runoff is stored, the dugout provides an environment for a wide variety of plants, animals, and micro-organisms which can have a huge impact on water quality.

The Prairie Climate

Climate has an over-riding effect on water supplies. Three broad climate zones characterize the Prairie region:

- Steppe
- Continental
- Sub-arctic.


The steppe climate is dry year-round, with cold winters and warm summers. The continental climate is wetter, with cold winters and cool summers. The sub-arctic climate is characteristic of the boreal forest. Winters are long and cold. Summers are short and cool. The majority of the Prairie grain belt is in the continental region. Southwestern Saskatchewan and southern Alberta, with the exception of the Cypress uplands, are within the steppe region. Very little agricultural land is contained in the sub-arctic region.

With the exception of the Alberta foothills, average annual precipitation across the Prairies increases from 300 mm in the southwest to 500 mm in the northeast. Most of this precipitation occurs as late spring and summer rains. Often storm events produce floods. Winter precipitation occurs as snowfall, which usually remains all winter, melts rapidly in early spring, and creates a runoff event.

Mean annual temperature generally decreases from southwest to northeast. Southern Alberta and southwestern Saskatchewan often experience warm winter winds, called Chinooks, which produce melting and evaporation of snow during winter months. The entire Prairie region experiences an annual water deficit whereby evapo-transpiration exceeds precipitation. Because of low precipitation and Chinooks, deficits are severe in the southwest. Large fluctuations in temperature and precipitation from year to year may produce periods of drought or extreme wet conditions.



Figure 2 Climate Zones

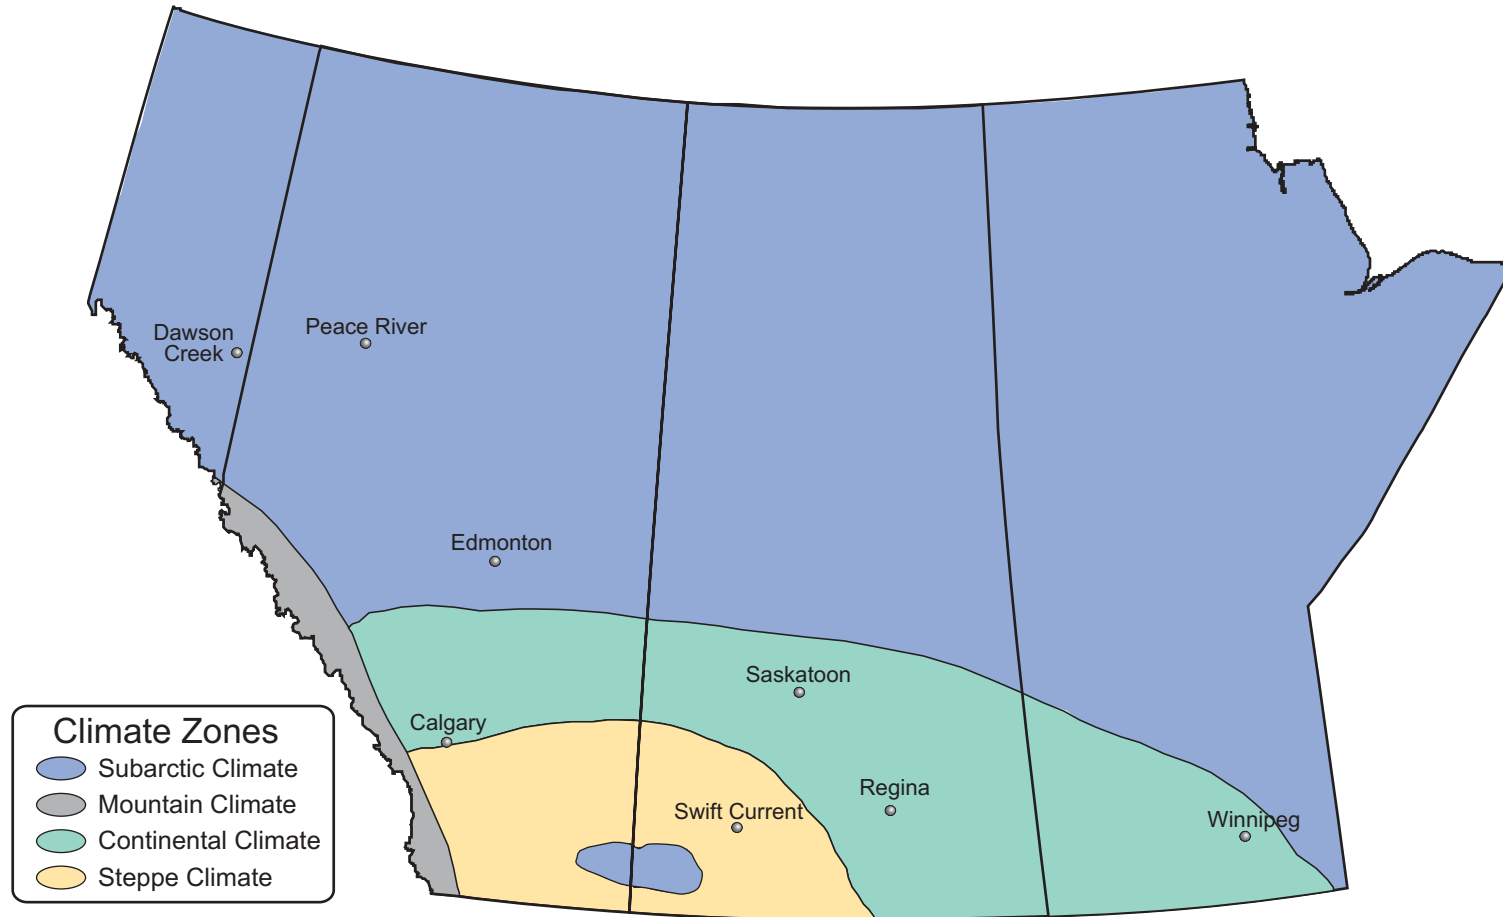

The Prairie Dugout



“Quality Farm Dugouts” focuses on the typical family farm dugout filled from runoff.

Dugouts are earthen excavations designed to collect runoff and store it for use during drier times. Typically, dugout capacity ranges from a few hundred thousand to several million imperial gallons. **Dugouts are not water sources of choice, but of necessity.** The reasons being the uncertainty of filling caused by annual variations in precipitation, and the problem of maintaining water quality. More reliable, superior quality, water can usually be provided by flowing surface water and many groundwater formations. However, for some Prairie families and agri-food operations, dugouts are the only practical water source and are relied upon for all uses. For others, dugouts may provide water for specific purposes only, such as watering livestock. This publication provides information about the “typical” family farm dugout.

However, the material may also be useful to managers of very large dugouts used for irrigation or watering animals in large livestock operations.



There are four major types of dugouts. The most common type is filled completely by runoff from surrounding fields. The second most common type is located adjacent to a flowing watercourse and is filled by either pumping or diverting water from the watercourse. For the purposes of this publication, a watercourse is defined as a creek, ditch, or other permanent or intermittent stream that has a well-defined channel with a streambed and banks.




Two other types of dugouts exist. One is an excavation made directly in a watercourse so that the stream fills the dugout and the overflow continues down the watercourse. This type of construction requires provincial approval and is **not** generally permitted because of downstream interests. With this type of construction an accumulation of nutrients and organic matter can result in poor water quality as inflow cannot be controlled. The remaining type of dugout is one in contact with shallow groundwater. This is also **not** recommended because it mixes surface and groundwater. Surface water is highly susceptible to microbial contamination and groundwater is typically highly mineralized. Most often, this mixture produces water that is of lower quality and more costly to treat than either surface or groundwater alone. Dugout owners often mistakenly assume that water entering a newly excavated dugout from a shallow aquifer provides insurance against drought. Although water levels may rise in times of high groundwater recharge, in times of falling groundwater levels, valuable runoff that has collected in the dugout may actually drain into the aquifer. In addition to emptying the dugout, this may introduce surface contaminants to the aquifer.

If you want to collect surface water, dig a dugout. If you want to use groundwater, dig a well.

For dugouts located on uneven ground, berms can be constructed on the lower sides of the dugout using the excavated earth to enable more water to be stored. To do this, strip the topsoil down to the subsoil where the berm is to be located, and then build up the bermed area with compacted subsoil to a level two feet higher than water level. This will prevent seepage loss under the berm and overtopping of the berm from wave action.

Figure 3 Dugout Types

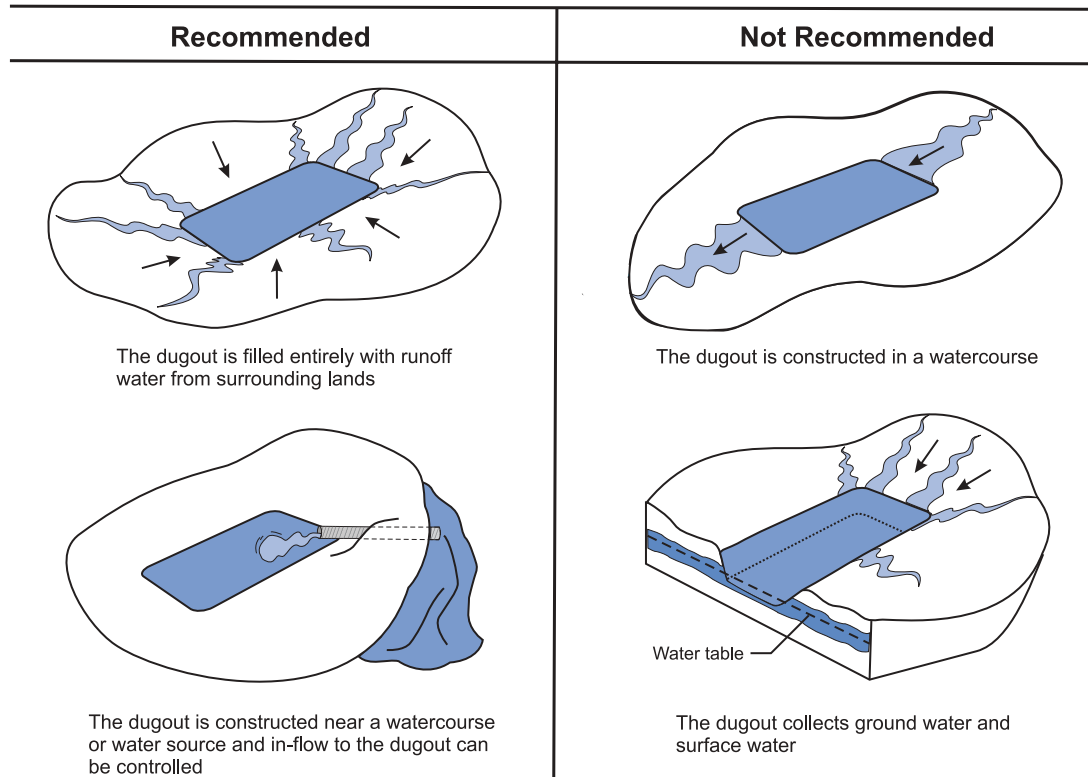

Dugout Water Quality

As previously noted, wells are generally preferred to dugouts because water quality in most dugouts is poor. Runoff water often brings dissolved and suspended materials that are detrimental to water quality, including:

- Disease-causing organisms
- Plant nutrients/dissolved fertilizers



A single liter of motor oil can make two million liters of water unfit for human drinking water.

- Pesticides
- Decomposed plant and algae material
- Suspended sediment
- Fuels, solvents, and paints
- Soil minerals.

The net result of contaminant-loaded runoff is poor quality, dugout water. However, dugout water quality can be managed, improved, and treated to meet most farm needs. Attempts to manage or enhance dugout water quality must recognize and work with the natural biological and chemical processes occurring in the dugout. Good dugout management starts with the dugout watershed and extends right through to the final use.


Biology of a Dugout



Many people see a dugout as a stagnant, lifeless body of water. Nothing could be further from the truth. As a newly constructed dugout fills for the first time, it is quickly invaded by a variety of organisms, including plants, microbes, insects, and animals, and develops its own unique ecosystem. The fertile soils in which most dugouts are located contribute nutrients for plant growth. The rooted plants and algae represent an important food source for tiny animals called zooplankton. Through the food chain, the zooplankton become a source of food for insects that ultimately become a source of food for amphibians and fish. In fact, a dugout is a living ecosystem driven by natural cycles and processes.

The biology of a dugout is similar to the cycle within any other small body of water. Each summer, warm temperatures, and long sunny days produce an explosion of plant and animal growth. In daylight, plants consume nutrients and pump oxygen into the water; at night time oxygen production stops and respiration consumes dissolved oxygen which can result in low dissolved oxygen levels.. When they die, microorganisms decompose their tissues. This decomposition process consumes oxygen. On hot, still days biological activity is high and there is little oxygen added by wind-driven mixing of the water. In winter when the surface is sealed by ice, oxygen levels can also become very low. When this occurs, anaerobic organisms that do not use oxygen take over the decomposition process. Anaerobic activity releases many unwanted compounds into water. These include forms of iron and manganese that produce coloured water, and unpleasant smelling swamp gases, such as methane and hydrogen sulfide. As these microorganisms die, their decomposition also adds nutrients to the water body that become available to plants to begin the cycle again.

Figure 4 Simplified Nutrient Cycle

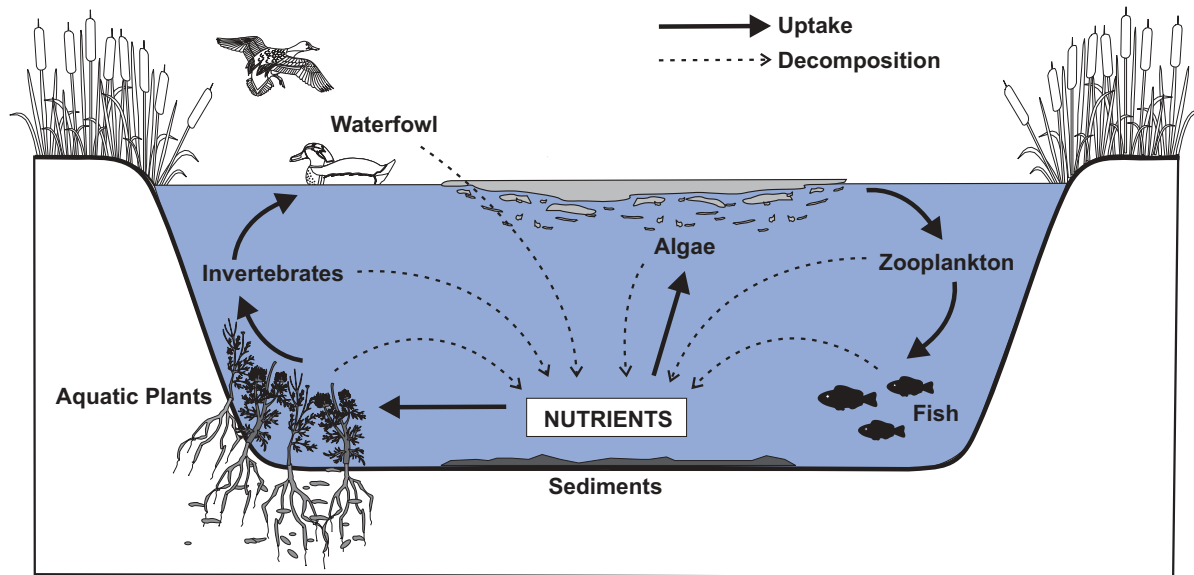

Many forms of plant life thrive in dugouts. Some species are rooted in the dugout but are totally submerged. Others inhabit the margins where they are rooted in the sediments but hold their vegetation above the water. Cattails and reeds are examples of this type of plant. Although only one of the many forms of plant life in a dugout, algae get a lot of attention. This is primarily due to the problems they cause in a water supply. Algae can be present in dugouts but go unnoticed most of the time. When conditions are favourable however, they can reproduce very rapidly and cause a “bloom”. Algae blooms cause a variety of problems:

- Toxins in the water
- Water turbidity
- Tastes and odours
- Clogging of filters
- Ineffective disinfection treatment
- Formation of toxic chlorination by-products
- Fluctuating oxygen levels between day and night can result in fish kills.





The formation of toxins by **cyanobacteria** is of the greatest concern. Some are capable of producing toxins that can damage the liver, nerves, lungs, and hearts of livestock. Cyanobacteria float near the water surface and wind action blows them to the side of the dugout. When livestock water directly at the edge of a dugout, they may be exposed to high concentrations of cyanobacteria in the water. Cases of livestock deaths due to cyanobacteria have occurred in all the Prairie Provinces.

Growth of cyanobacteria is greatest when the water is warm and concentrations of nutrients, especially phosphorus, are high. It is not easy to distinguish between cyanobacteria and harmless green algae. Positive identification requires training and use of a microscope. When an algae bloom occurs in water used for livestock, it is best to exercise extreme caution. Little corrective action is possible, once a cyanobacteria bloom has occurred. The most effective strategy for reducing the risk is to manage a dugout so the conditions that induce large populations do not develop. Much of this manual is devoted to this topic.

Figure 5 Duckweed

Duckweed is a readily identified oval shaped plant that floats on the water surface, and forms a mat that can cover the entire dugout.



Figure 6 Green (Filamentous) Algae

There are many types of green algae. Shown here is a filamentous type, which is characterized by long threads or filaments of cells attached together, and found floating as a mat on the surface. It is commonly called pond scum.





Figure 7 Cyanobacteria

There are many types of Cyanobacteria. They are microscopic in size, but become visible when large populations develop forming what is termed a "bloom". Some types are extremely toxic to humans and animals.



Figure 8 Cyanobacteria

One type of cyanobacteria is highly visible due to its "grass clipping" appearance with pieces measuring from 1/2 to 3/4 inch in length.

Cyanobacteria is often incorrectly referred to as blue-green algae. It is bacteria, not algae.



A much-maligned, but harmless plant called duckweed is sometimes confused with algae. It can be readily identified upon close inspection. Duckweed is an oval shaped plant that floats on the water surface. It can cover an entire water body with a green mat composed of millions of small plants. Duckweed can be beneficial in a dugout by preventing light penetration of the water and thereby shading out algae. It also takes up nitrogen and phosphorus from the water. Long-lasting benefit from duckweed is only realized however, if plants are removed before they die and the nutrients are released back into the water. To be successful the duckweed must be removed as often as once a month.

The Life Span of a Dugout



Like all man-made things, a farm dugout does not last forever. All bodies of water, including farm dugouts, undergo a natural aging process. As the years go by, the dugout accumulates sediment from wind and water erosion. In some circumstances, an average sized dugout can collect more than 15 inches of sediment each year. This can total 50 tons or more. As the excavation fills with sediment, the holding capacity becomes greatly reduced. Some of the rehabilitation work on dugouts has shown that from 1 to 10% of water volume can be lost in a single year. Sediment also contributes nutrients that rapidly accelerate the natural aging process by increasing plant growth and lowering water quality.

Ten per cent of dugout capacity can be lost in a single year due to sediment inflow from adjacent land.

As a dugout fills with sediment, water quality deteriorates. In addition to collecting water and sediment, dugouts are very efficient at trapping the nutrients deposited from runoff to the dugout. Year after year, the accumulation of these nutrients from runoff events, plus their continual re-cycling within a dugout cause a steady increase in plant and algae growth. This leads to an ongoing deterioration in dugout water quality. A shallow dugout also warms more quickly in the summer and cools more rapidly in the winter. Warm water encourages algae growth in summer. The winter ice layer leaves even less water available and concentrates salts and nutrients in a smaller volume of water.


The actual life span of a dugout depends on the quality of water that is required for different uses. Drinking water must have low biological activity. Irrigation water must have low levels of soluble salts. The length of time that a dugout can sustain the required quality is dependent on land-use practices in the watershed and the actual management of the dugout. As dugouts age, lower water quality can be expected.

In general, a farm dugout provides good water quality for about the first five years. Over the next ten years, storage capacity and water quality deteriorate. After 20 years, storage capacity and water quality have usually been reduced to the point where the dugout no longer meets the needs of the landowner. Regardless of its uses, the life span of a dugout can be extended significantly through effective management.




Figure 9 New vs. Old, Dugout Cross-sections

New Dugout

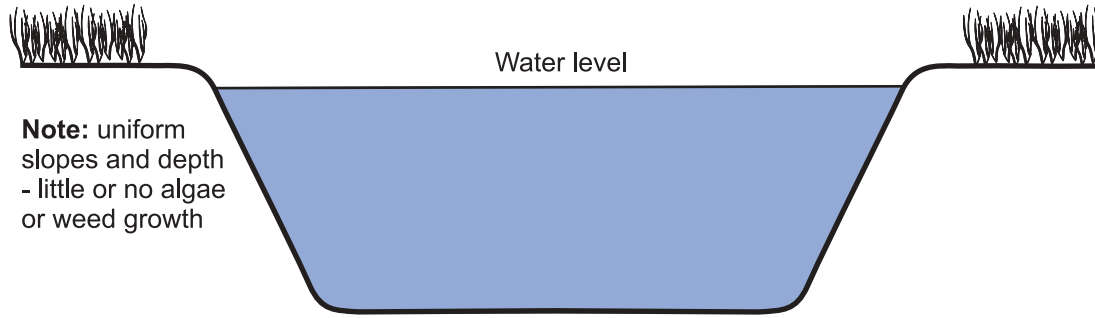


Note: uniform slopes and depth - little or no algae or weed growth

Old Dugout

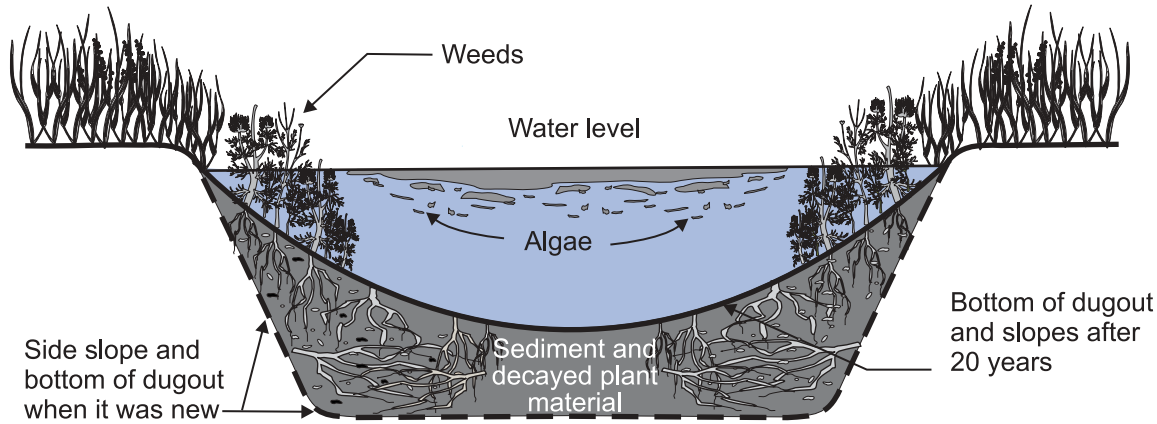

Planning

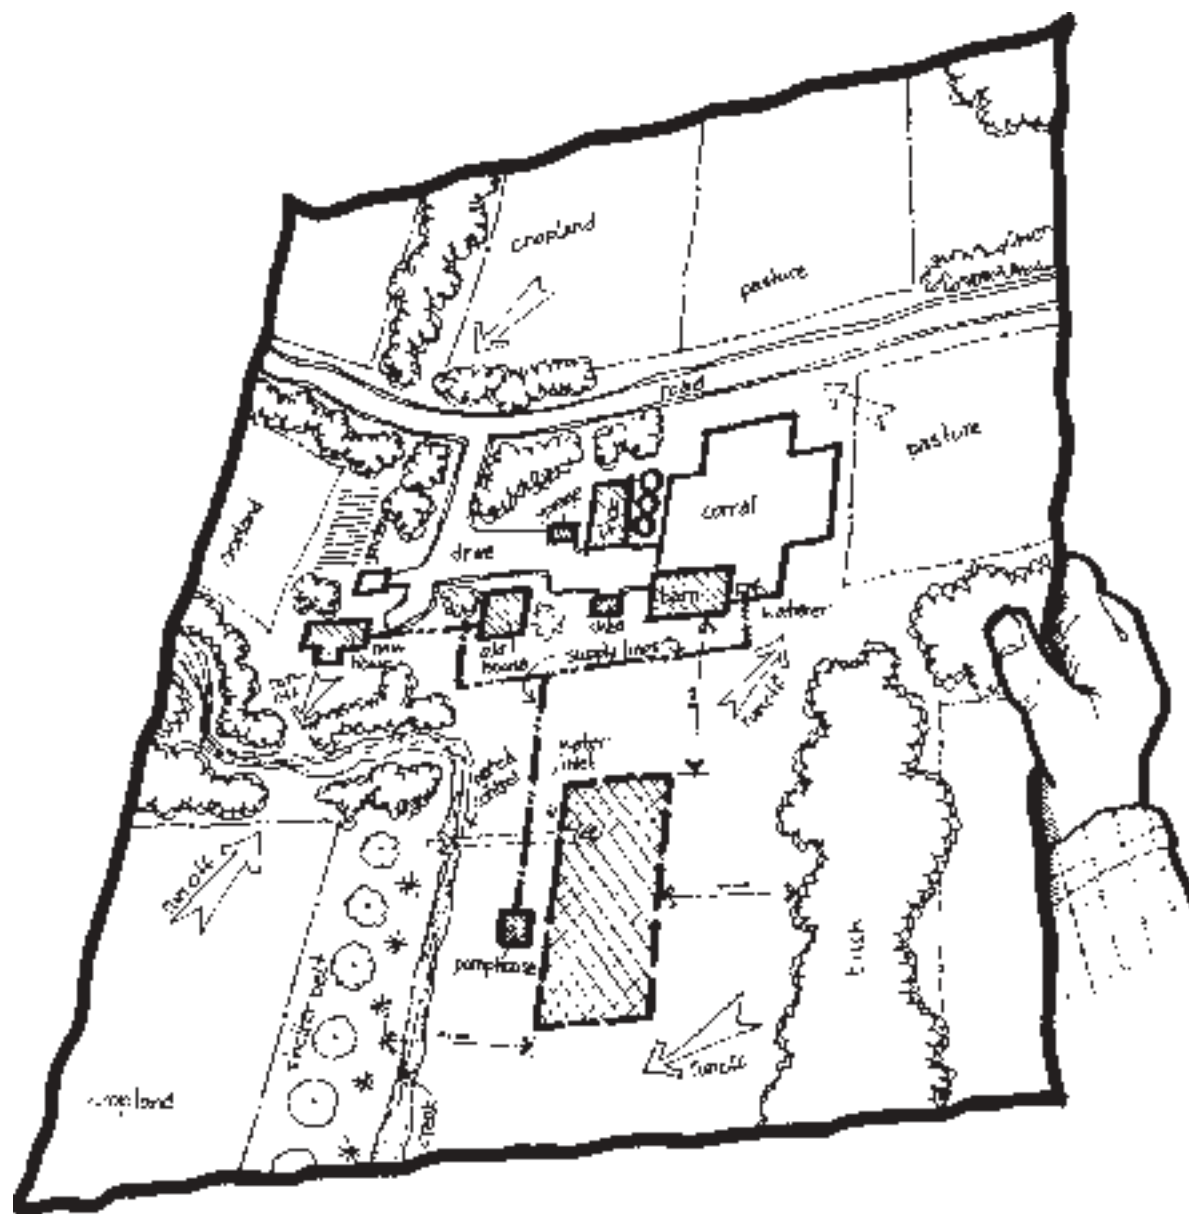

Planning Farm Water Supplies

Although a well-planned and designed water system may cost more initially, it will ultimately save money. Costly changes to correct future problems will be avoided.

The initial planning steps include:

- **Determination of Water Requirements**
The first step in planning is to determine the amount of water required. Estimating future needs should take into account any anticipated changes such as an expansion or diversification of farm activities.
- **Inventory of Water Sources**
The next step is to take an inventory of all water sources. Many farms use more than one water supply. Account for production rates, storage volumes, and any previous problems with water quantity or quality for each source. If the dugout is to be the only source of water, uncertainty of runoff volume should be factored into the sizing calculation. Because of frequent drought on the Prairies, it is recommended that all dugouts be constructed to hold at least a two-year water supply. In situations where the dugout is not critical to operations or alternate supplies are readily available, a smaller dugout may be chosen. Calculations in this manual however, focus on the two-year supply.
- **Land Use Planning to Protect Water Supply**
Activities within a watershed have a large impact on water quality and quantity. Evaluating and adapting farm practice where it affects runoff, can do much to increase dugout utility.

Regulatory and Funding Issues

Before constructing a new dugout, it is important to be aware of legal restrictions that may apply. Ownership of surface and groundwater is vested in the provinces. Dugouts for household and livestock consumption do not usually require provincial approval. However, approval is required for the following uses:

- Aquaculture
- Commercial uses

- Municipal uses
- Tank-loading
- Irrigation.

In most jurisdictions, municipal and provincial, there are also requirements for minimum setback distances from public roadways. Stocking of dugouts with fish is controlled to minimize the risks of discharges that could introduce disease and non-native species of fish into natural waterways.

Before constructing a dugout, it is important that appropriate authorities are consulted to ensure compliance with existing regulations. Obtaining approvals well in advance will avoid delays in construction.

The federal government, through the PFRA, and the provincial governments offer technical assistance for the construction or improvement of dugout water supplies. Financial assistance may be available for some projects. Regulations and funding vary significantly between provinces. Provincial regulation summaries are provided in **Appendix 1**.



Watershed Runoff Potential and Water Quality

Both the quantity and quality of water are affected by the characteristics of the drainage area and the activities that take place within it. The most important characteristic in determining potential runoff into a dugout is the size of the drainage area or watershed. In addition, soil type, land use, topography, and vegetative cover all influence the total quantity of water that will flow into a dugout.

Watershed Runoff Potential and Dugout Sizing

This section discusses factors that should be considered when selecting a site for your dugout. It is essential that a dugout be located to capture the quantity of water required. There are many considerations when choosing a site. Inevitably, some trade-off between conflicting factors will be required. However, it is worth the time and trouble to find the best location for a dugout that will be in use for many years.




Dugout Sizing

Dugouts fill with runoff from the surrounding land. The most important factors to consider in sizing are the potential amount of runoff that will be captured, evaporation loss, and the shape and dimensions of the dugout.

Figure 10 illustrates the necessity of sizing dugouts properly so they provide a dependable source of water. In this example, the dugout has received no runoff water in two years. The cross-sectional view shows how the supply of available water is reduced by farm use, lack of runoff, evaporation, and ice formation in winter. In addition to uses and losses, the water at the bottom of the dugout will be of such poor quality, that it is rated as dead storage and unavailable for use.



Figure 10 Dugout Size vs. Available Water

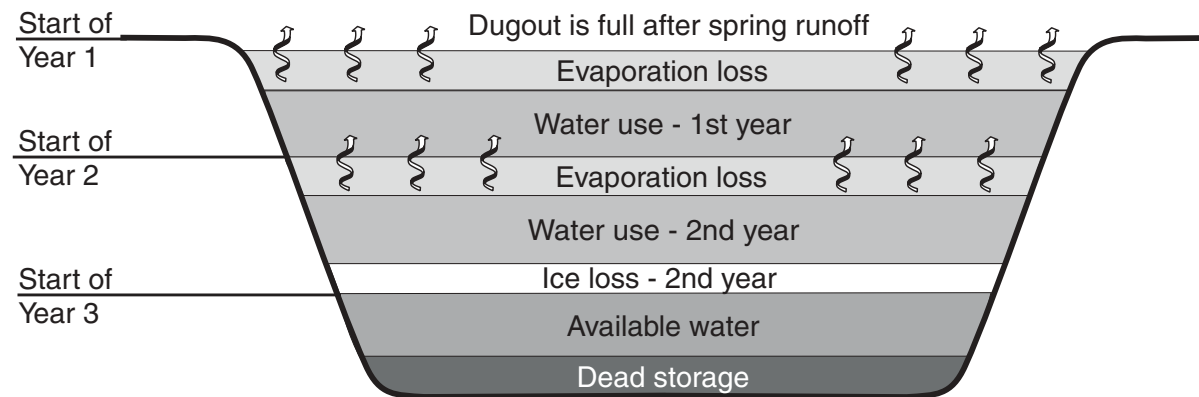

Runoff volume is determined by the amount and timing of snowmelt or precipitation, plus vegetation, soil type, soil moisture, and topography. The smaller the quantity of runoff expected in an area, the larger the contributing area must be to fill a dugout. In some dry regions of southeastern Alberta and southwestern Saskatchewan, more than 2000 acres of land are required to produce enough runoff to fill a dugout with a capacity of one million imperial gallons. In wetter areas of southeastern Manitoba, less than 25 acres would be required to supply the same volume.

Figure 11 shows the approximate area of land required to provide runoff water volume equal to or greater than one million imperial gallons. Runoff varies a great deal from year to year. The map is based on long term runoff data. In eight out of every ten years, the specified amount or more runoff occurred. In two out of ten years, there was less runoff. The uncertainty of runoff should be kept in mind when planning dugout size. If a particular watershed is too small to provide enough runoff, you have two choices:

- Find a larger watershed.
- Find an additional watershed and build a second dugout.

When faced with these choices it is a good idea to consult a water specialist. Evaporation rate is an important factor in dugout sizing that varies widely between regions. Figure 12 is a map of evaporation loss zones on the Prairies. The greater the evaporative losses, the greater the storage volume must be to guarantee continuous supply.

The shape of a dugout has important implications for both the quantity and quality of the stored water. Historically, most dugouts have been about 12 feet deep. However, new larger structures are being excavated to depths of 15, 18, and 21 feet and even deeper.

A deeper dugout is more efficient because it has less surface area for the same capacity, and thus loses less water to evaporation. This can have a significant effect on the required volume. For example, in Evaporation Zone 4, a 21 foot-deep dugout can be constructed with approximately two thirds the volume of a 15 foot deep dugout and provide the same amount of available water. Deeper dugouts tend to have better water quality, particularly in winter. Three main concerns with deeper dugouts are high water tables, seepage losses, and increased safety hazard.

During winter, dugouts freeze and some of the stored water becomes unavailable for use. Ice can reach up to 2 to 3 feet in thickness, which may represent up to 20-40% of total volume. Figure 10 shows the amount of stored water that becomes unavailable for use during winter.



Figure 11 Runoff Map



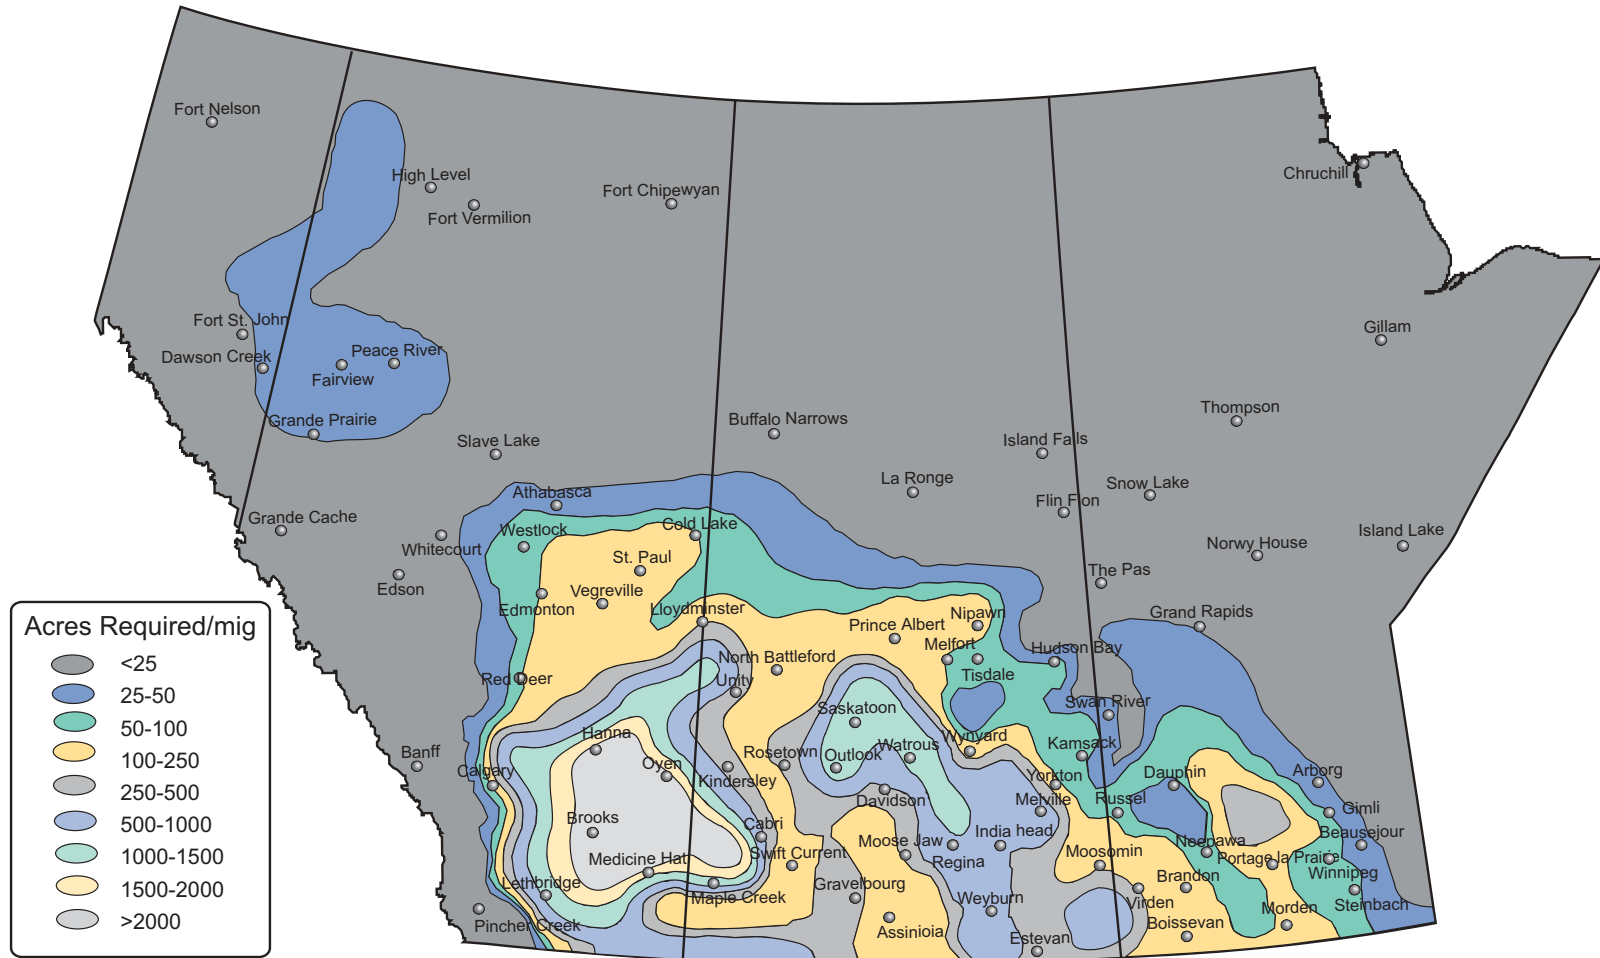


Figure 12 Evaporation Zones

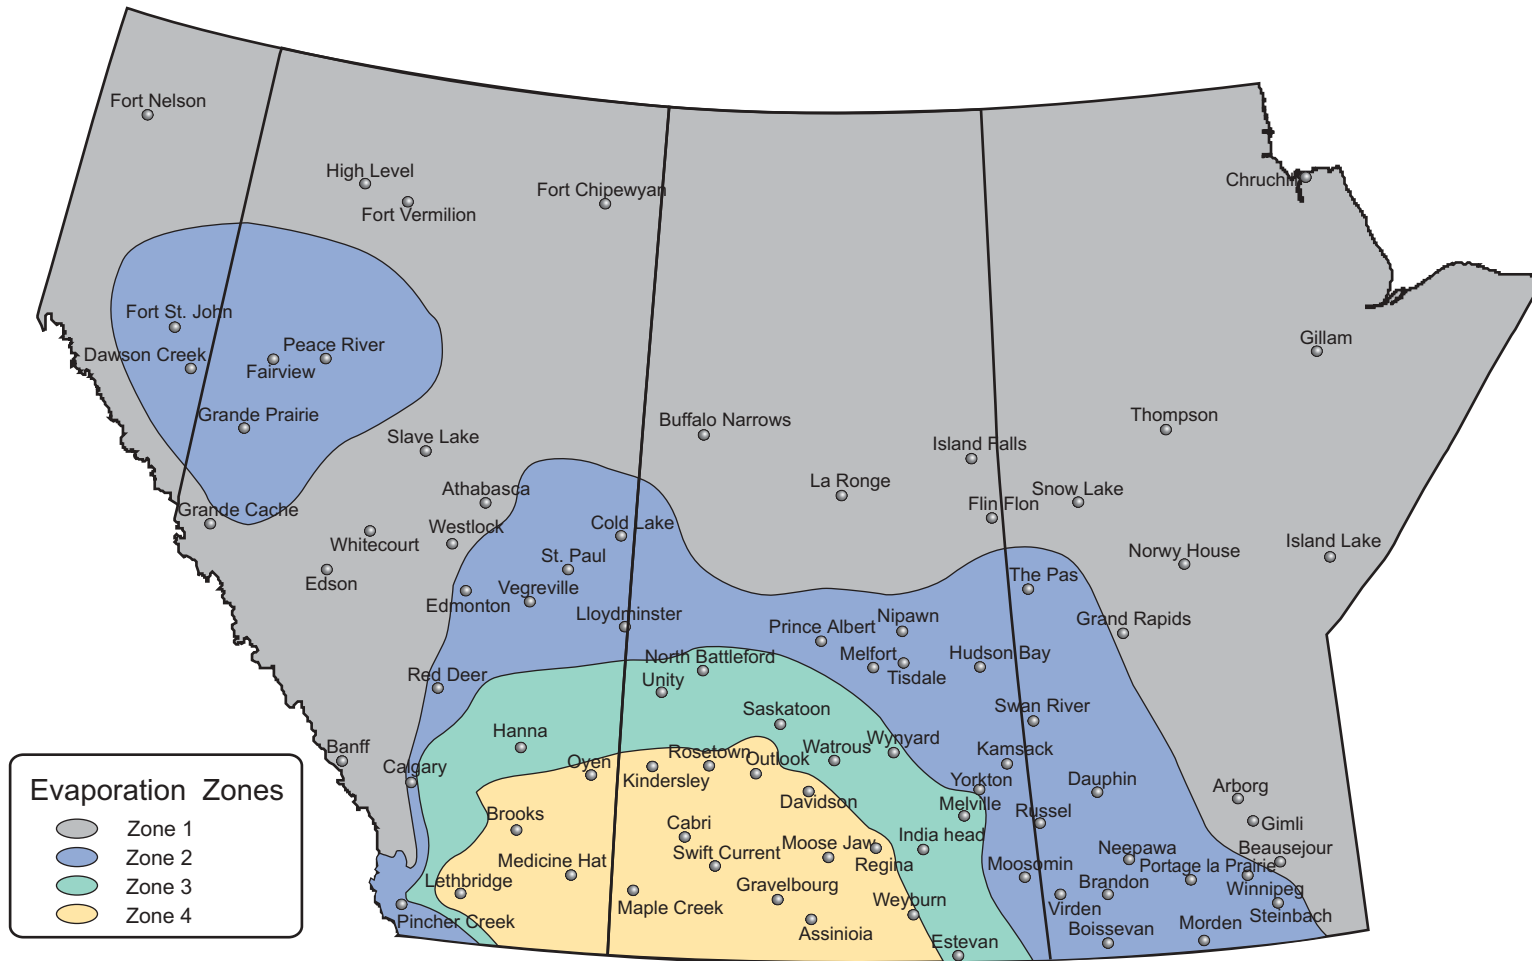

In general, the colder the climate the thicker the ice, and the greater the loss of available water. However, this can be offset by differences in snowfall. Snow cover on the ice insulates the water from further freezing. Figure 13 shows average expected ice thickness on small water bodies in different parts of the Prairies.

Figure 13 Ice Thickness Map

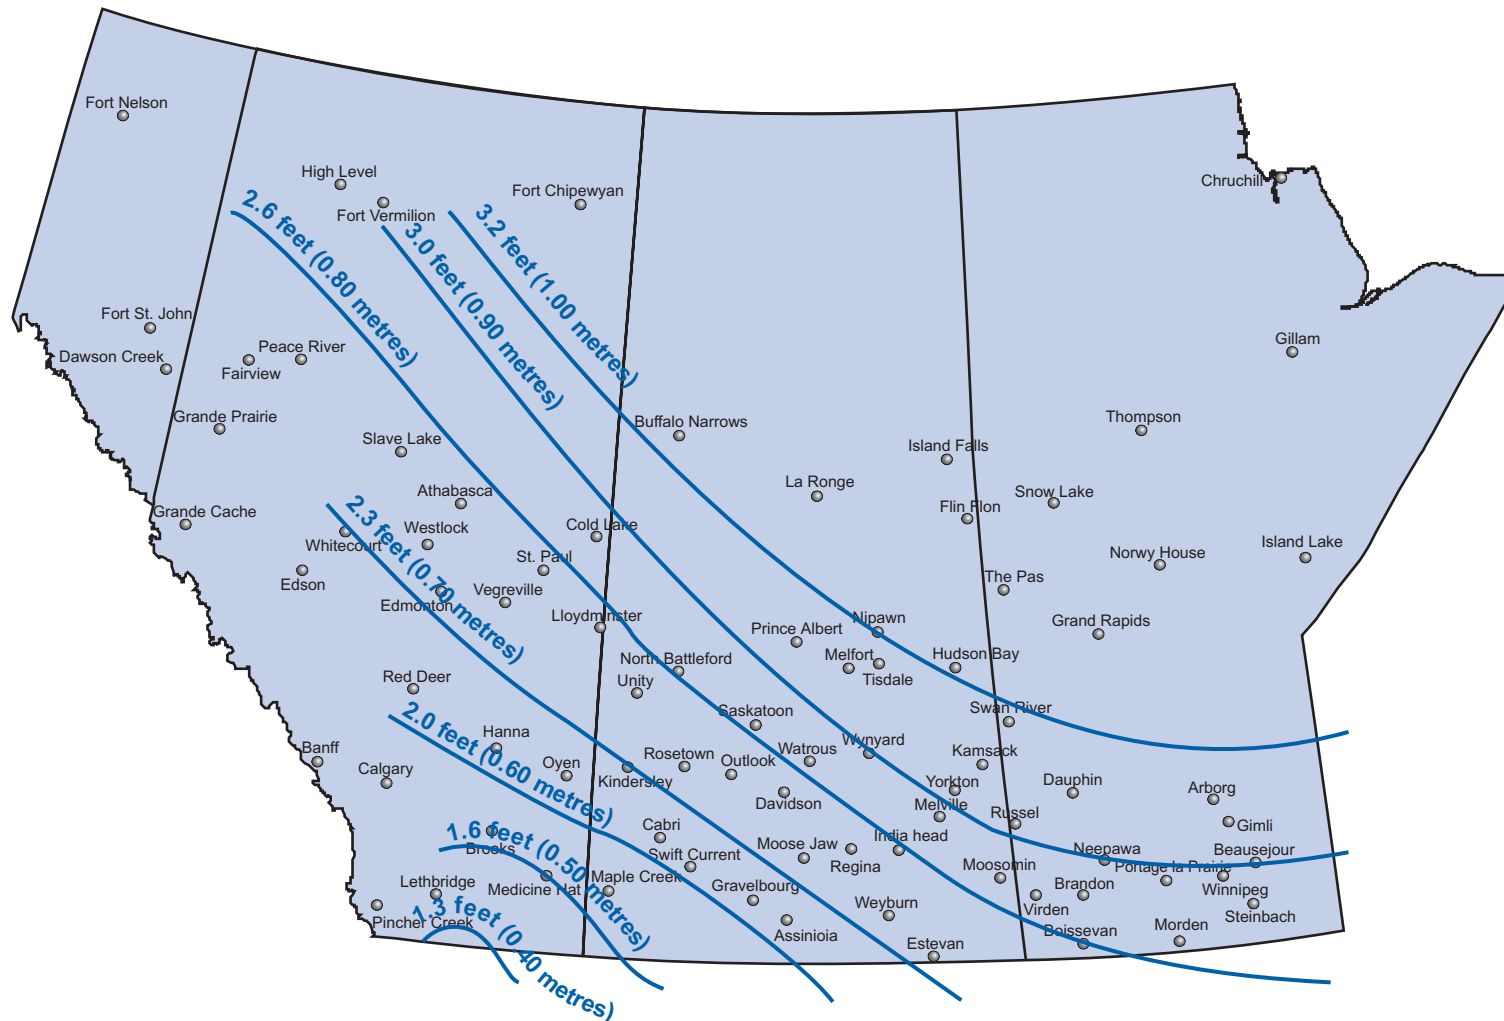

The climate and runoff information given above is used to plan the size of a dugout for any location on the Prairies.

Figure 14 illustrates an example of the dugout sizing process for the Joe Agricola Family Farm at Kindersley, Saskatchewan. Remove the completed example from the pocket inside the front cover of the manual and work through it. **Completing this exercise can potentially save you thousands of dollars in construction costs.** Carefully follow the steps and calculations to understand the process. Blank forms for accurately sizing your farm dugout are located in the pocket inside the back cover of the manual.




Water Quality and Watershed Management

Good watershed management is the first line of defense for ensuring good quality, dugout water. Using what are termed Best Management Practices or **BMPs** within the catchment or runoff area can minimize the possibility of dugout water contamination. Contamination occurs through a number of processes.

- Plant nutrients from natural sources, fertilizers, and manure entering a dugout in field runoff stimulate the growth of plants and algae.
- Pesticides can contaminate water when stored improperly, mixed carelessly, or spilled. They can also be present in runoff water from recently sprayed fields. Airborne drift clouds are able to travel long distances and may be deposited in streams, lakes, and dugouts.
- Runoff from livestock confinement areas is typically rich in nutrients and likely contaminated with bacteria, viruses, and parasites.
- Poorly sited waste disposal sites or inadequate storage facilities, can contribute fuels, paints, solvents, and other hazardous chemicals to dugout in-flow water.
- Water erosion loads runoff water with soil, nutrients, and pesticides that may end up in dugouts. Long, steep slopes in the landscape, that are not under perennial cover, are very susceptible to water erosion events. Even relatively level fields can be subject to severe water erosion during spring runoff and heavy rainfall events. Silty soils are particularly susceptible to water erosion. Suspended solids in runoff water cause turbidity in dugouts, causing problems in water distribution systems and increasing the difficulty and cost of treatment.
- Wind erosion may lead to contamination of dugouts when soil is blown into the water from adjacent fields or livestock areas. Sandy soils and heavy clay soils are most susceptible to wind erosion.



Figure 14 Dugout Sizing Example

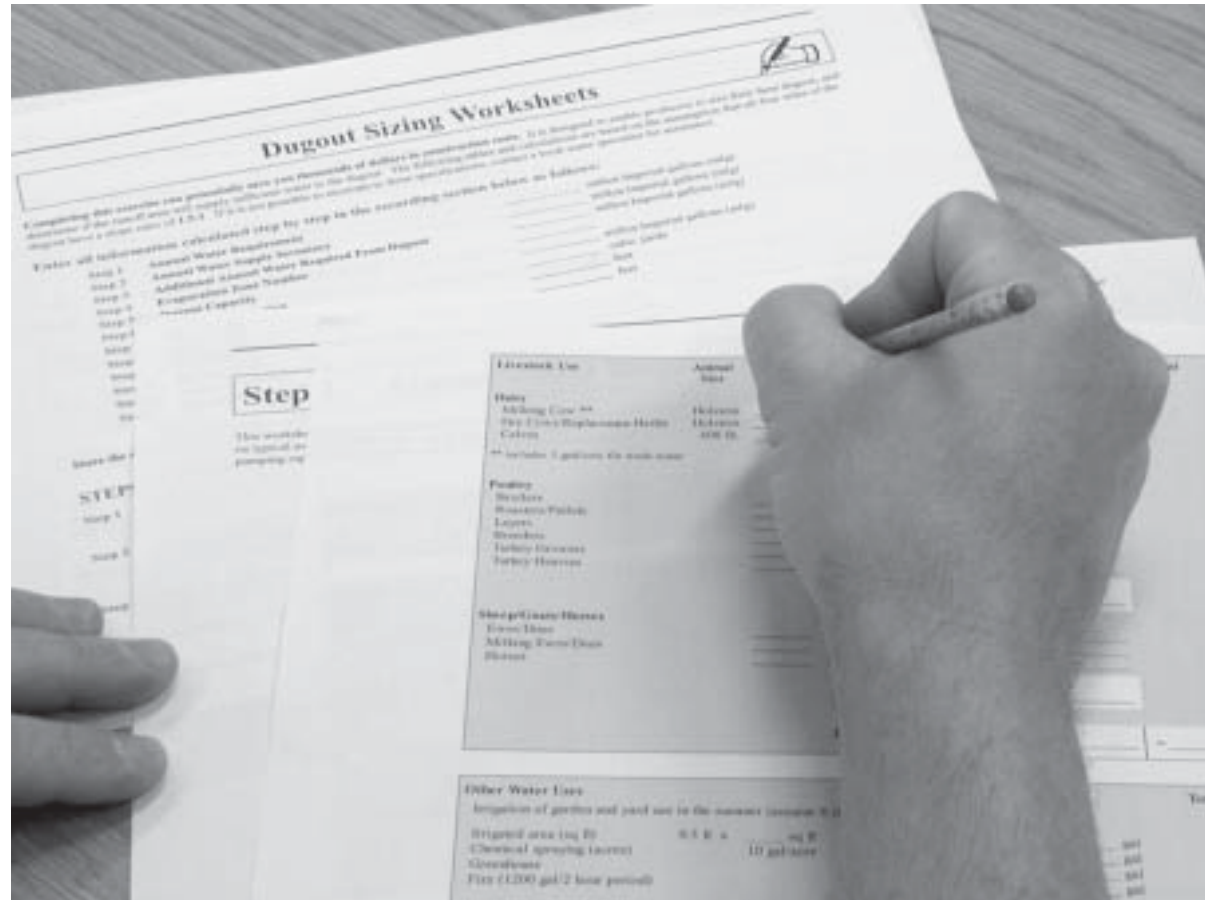


Best Management Practices in a Watershed



The following BMPs can reduce erosion and contamination of inflow water:

- Agricultural fields in annual cultivation are prone to wind and water erosion, particularly when residue cover is poor in winter and early spring. Soil surface protection practices are highly effective ways of preventing erosion:
 - Seeding erodible land to perennial forages
 - Using conservation tillage
 - Maintaining crop residues in the fall
 - Using winter cover crops
 - Using crop rotations that follow low-residue crops with those with higher straw-yield.
- Practices that slow water runoff velocity and reduce water erosion:
 - Grassing waterways
 - Contour planting placing rows perpendicular to the slope of a field.
- Practices that slow wind velocity and reduce wind erosion:
 - Strip farming consisting of alternating bands of annual and perennial crops.
 - Planting and maintaining shelterbelts.
- The amount of fertilizers applied in a watershed can be minimized by proper nutrient management planning. Nutrient management is based on application of only enough fertilizer to make up the difference between the amount available in the soil and the crop requirement.
- Total amounts of pesticides applied to a watershed can be minimized through the principles of Integrated Pest Management or “IPM”. IPM is a pest management system using the application of a variety of management practices and control measures.
- Remote watering systems prevent livestock from having direct access to a dugout, or to other areas in the watershed that directly contribute runoff to a dugout.
- Good manure management protects water from contamination. As with chemical fertilizers, manure should not be applied in quantities that provide plant nutrients in amounts that exceed crop requirements.
- Good livestock management prevents over-grazing, which can leave soils susceptible to erosion. This can be prevented by using a rotational grazing system.

Figure 15 Watershed with Best Management Practices

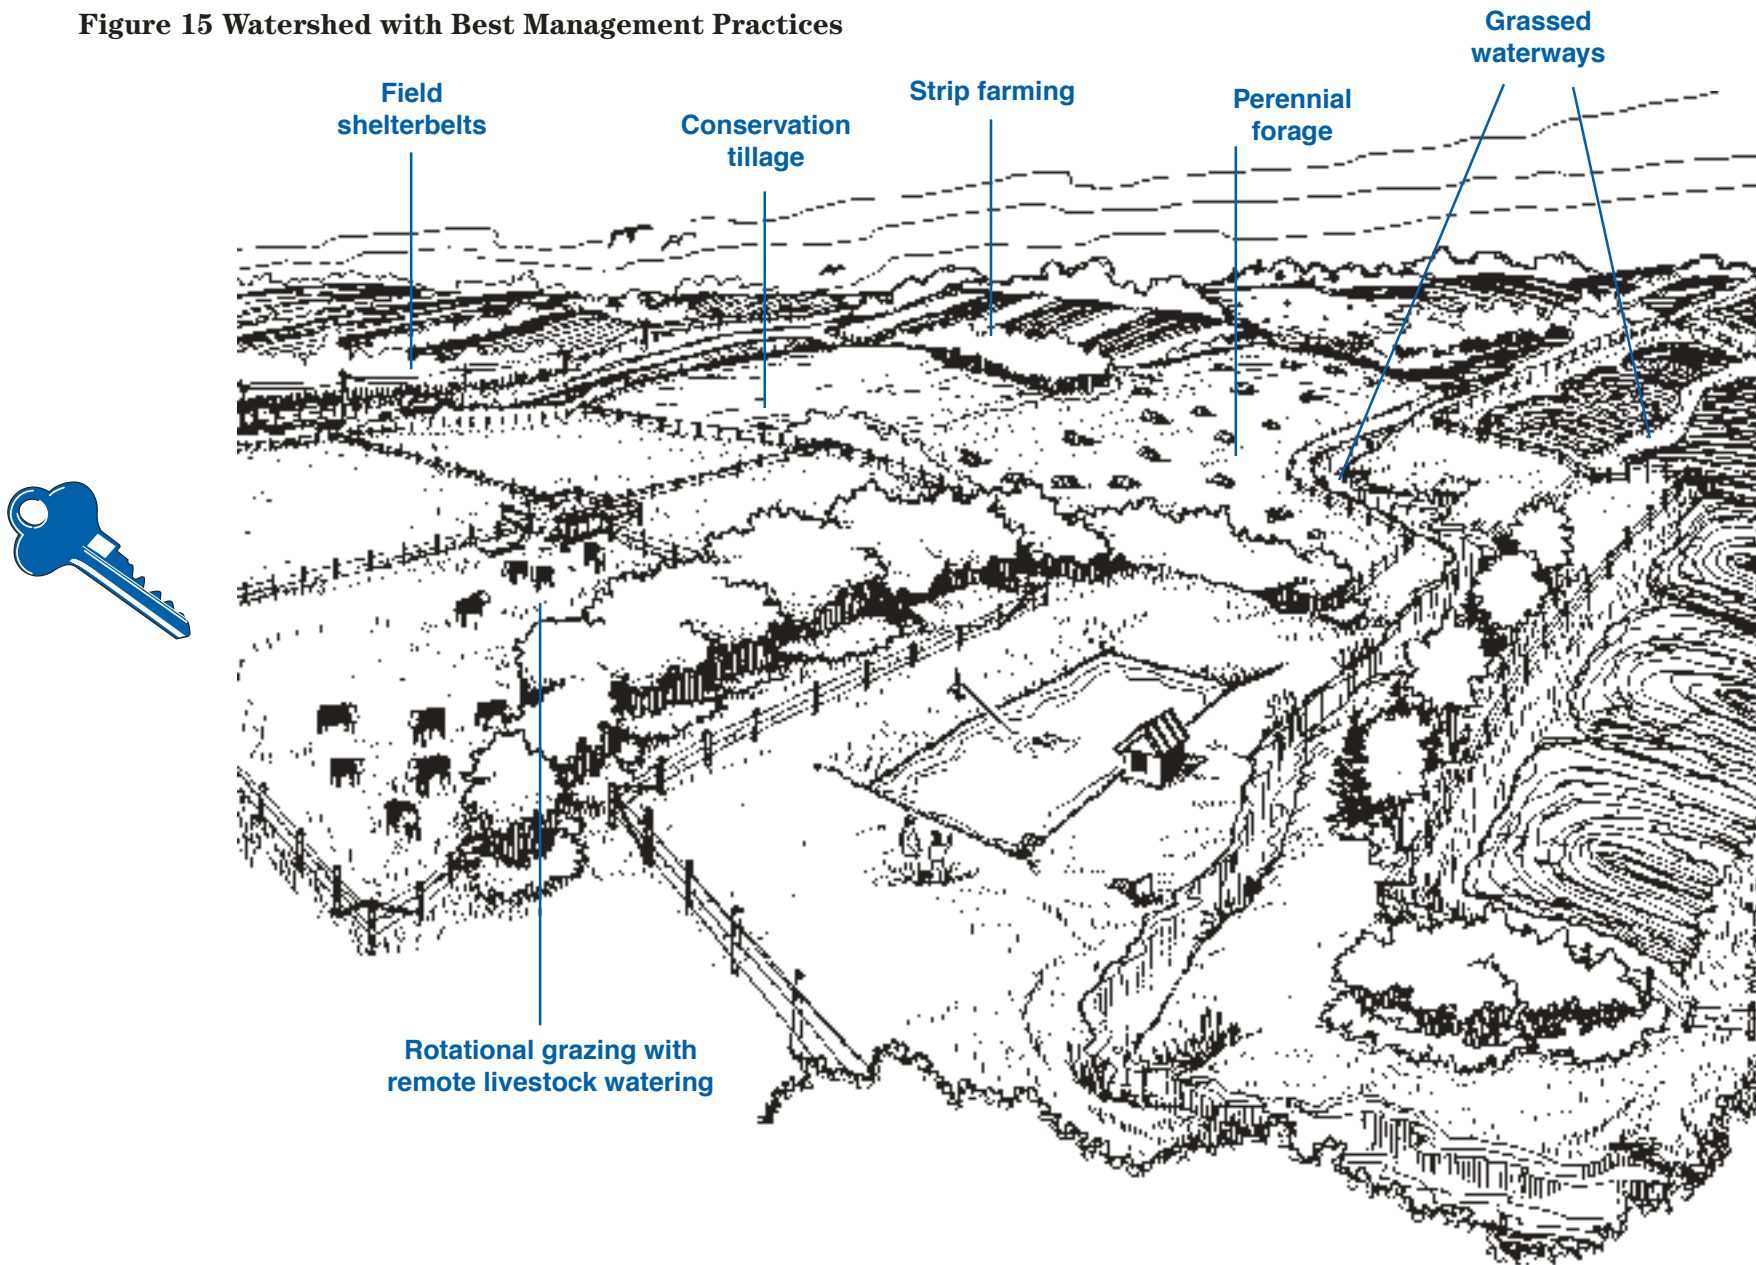

Dugout Siting

Locating a dugout to collect enough water is of primary importance, but there are other factors to consider when planning the location:

Proximity to Water Use:

By locating a dugout close to places where the water will be used, construction and maintenance costs of water lines and power pumping costs can be minimized.

Proximity to Electrical Power

Most water delivery systems have the pump near the dugout. Nearby electrical power reduces costs for extending power lines. Ready access to power also allows for easy installation of an electric aeration system.

Trees

Properly placed trees can act as snow traps and increase the amount of runoff collected each spring. However, trees close to the dugout tend to block the wind and reduce the positive effects of wind on the mixing of dugout water. Trees also reduce the effectiveness of any windmill-driven mixing devices. Leaves and twigs that are dropped by trees and deposited into dugout water add organic matter and plant nutrients that encourage weed and algae growth and reduce water quality. Large trees planted close to a dugout can use much of the stored water if their roots can reach the reservoir. It is recommended that deciduous trees be planted no closer than 160 feet (50 meters) and coniferous trees and shrubs no closer than 65 feet (20 meters).

Proximity to Other Water Sources

If possible, locating a dugout near another water source is advisable. Dugout water quality can sometimes be improved by pumping water into a dugout from another source such as a creek or slough.



Contamination

Sites that could be affected by contaminated runoff or leaching should be avoided:

- Manure storage areas
- Animal confinement areas
- Waste disposal sites
- Pesticide and fertilizer storage areas
- Septic fields
- Commercial and industrial sites.

Design and Construction



Dugout Design

The construction and management of a dugout can have a large impact on water quality. Design options allow dugout owners to control inflow and permit only the highest quality water to be stored. Once runoff has been collected, good management can prevent water quality from deteriorating.

Slopes

Historically, dugouts on the Prairies were constructed with 1.5:1 side-slopes and 4:1 end-slopes. The soil conditions and the construction equipment available largely dictated these specifications. Equipment capable of digging deeper excavations with steep end-slopes is now readily available. Steeper slopes reduce the growth of cattails and other aquatic plants that contribute organic matter and plant nutrients to the water. However, a dugout with four steep sides can be a safety hazard. It is recommended that dugouts be fenced to exclude livestock, and a floatation device should be available and used to protect children and adults from drowning.

Erosion Control



Spoil piles are created during the construction of a dugout. If spoil piles are located at the edge of a dugout, they may erode or slump into the water. Spoil piles may also act as a windbreak and reduce wind mixing, which incorporates oxygen into the water. It is recommended that the spoil piles around a dugout be leveled to maintain bank stability, and grassed to provide a filter that reduces the entry of soil and nutrients. Although the ideal width of a grassed buffer varies between sites, the recommended **minimum** is 10 meters.

In windy areas of the Prairies, dugout life is increased when the dugout sides and end slopes are protected to prevent soil erosion by wave action. This can be done with a combination of grass, rocks - often termed **riprap**, heavy plastic, or **geo-textile** materials. Riprap can also be effective at discouraging muskrats from moving in.

Inlet Structures

A dike and gated culvert inlet can be built to give the owner control over the inflow water. Poor quality water can be prevented from entering a dugout. The first flow of water from cultivated fields during snowmelt is typically high in dissolved nitrogen and phosphorus. Excluding this initial volume of water can improve water quality. Diverting flow away from the dugout is only practical where it is certain that there is more than enough runoff to fill the dugout. After the dugout has filled, the inlet should be blocked. This prevents sediment and nutrients carried by runoff from spring and summer rains from entering the dugout. If water is pumped into a dugout, prevent bank erosion from occurring at the discharge point.



Livestock Exclusion

Allowing animals to water directly from a dugout degrades water quality and drastically shortens the life of a dugout. Nutrients from manure stimulate plant growth and hoof action destroys dugout banks. It is recommended that all dugouts be fenced off and water supplied to livestock through remote watering systems. This protects the dugout, its water quality, and the livestock themselves. Many options are now available for supplying water to livestock on remote sites. Where a dugout is far from electricity, alternative power sources including windmills, solar panels, gravity systems, and animal powered devices, such as “nose pumps” are reliable and affordable options.




Sedimentation Dugouts

Much of the unwanted material that enters a dugout in runoff is suspended. If water is allowed to stand, much of the suspended soil and organic matter will sink to the bottom. In locations where the soil is highly erodible, and the landscape and costs permit, two dugouts can be constructed adjacent to one another. The first will act as a settling pond. High quality, surface water can then be either pumped into the supply dugout or allowed to flow in by gravity.



In a situation where an existing dugout is being replaced with a new one, it may be useful to retain the original as a sedimentation structure. The new dugout can often be positioned to fill with water that has been allowed to settle in the old dugout. This can be more beneficial and economical than cleaning out the original dugout.

Figure 16 Dugout with Design Best Management Practices

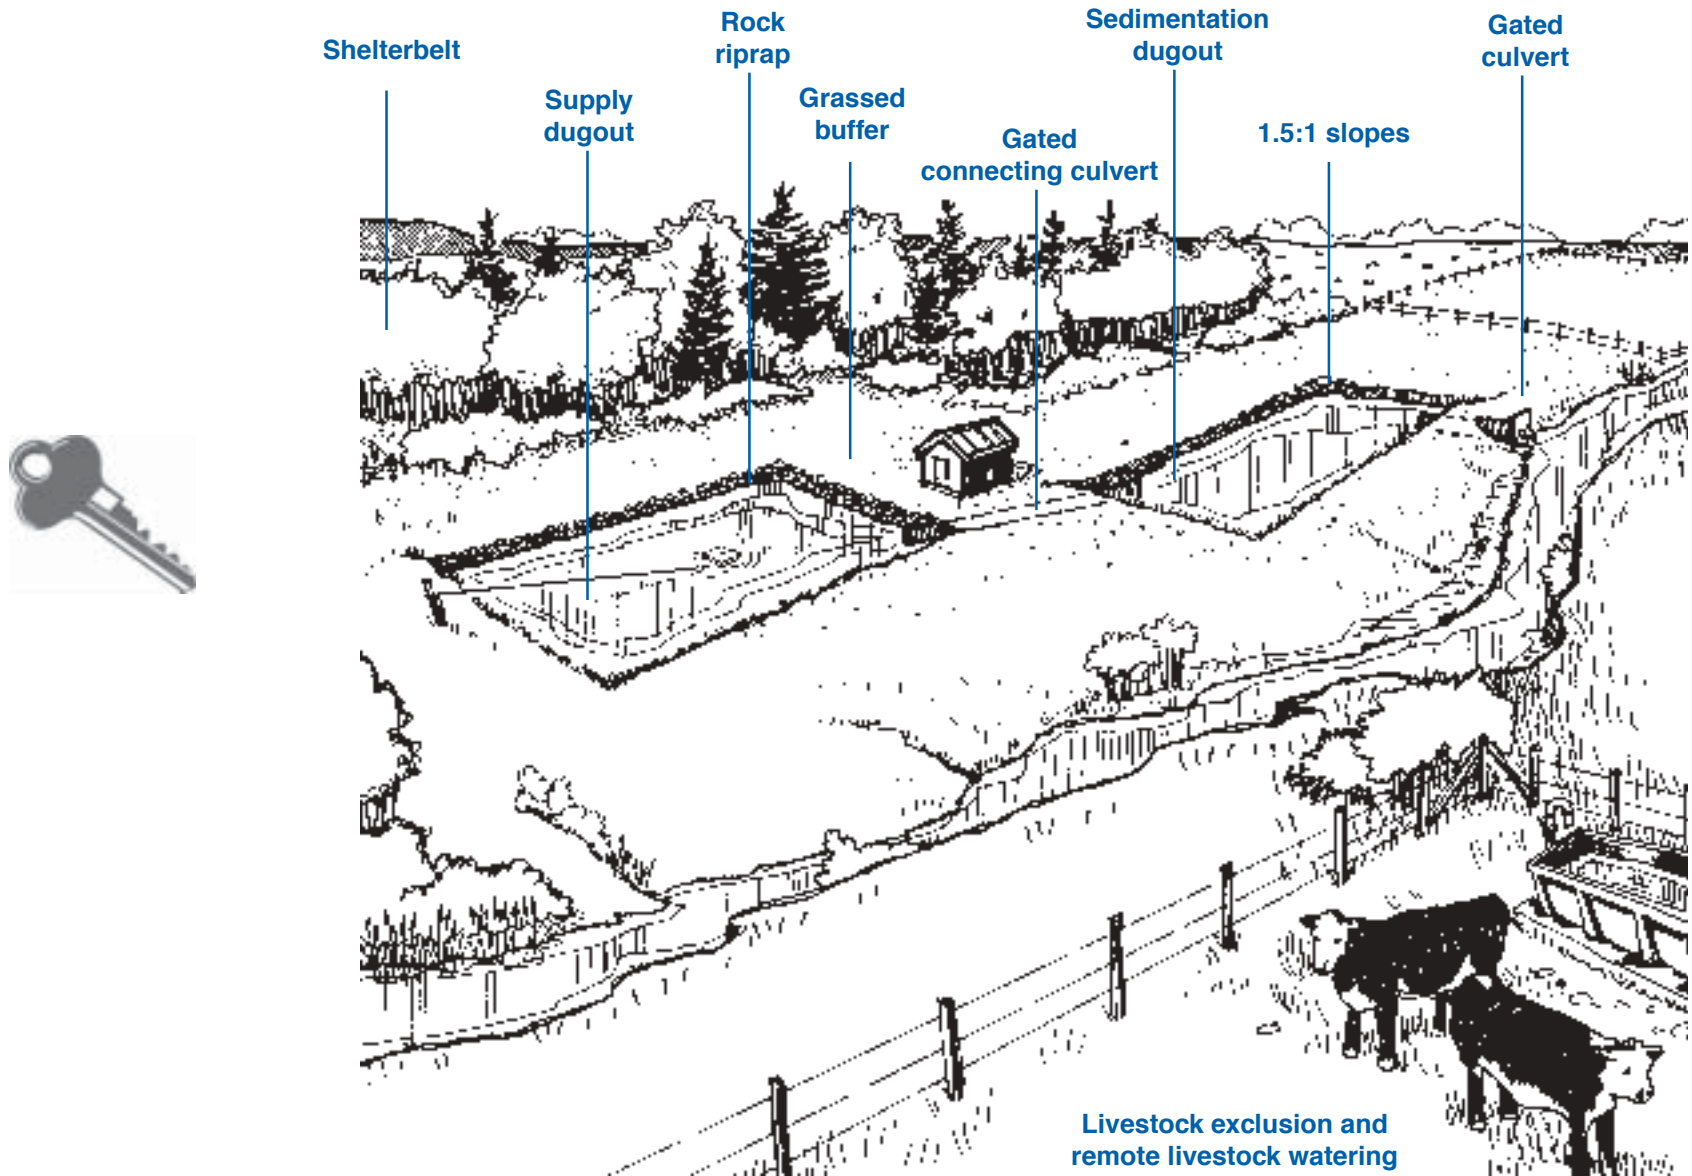

Dugout Construction

Pre-Construction Testing

In many areas of the Prairies; sand, silt, and gravel layers occur close to the soil surface. Many of these layers can contain small amounts of groundwater that has seeped down from the surface. While many people installing new dugouts believe it is good to have water seeping into the dugout, these lenses of sand and silt can create many problems. They may provide a path for water to seep out of the dugout leading to depleted water supplies during periods of drought. In addition, highly mineralized ground water seeping into the dugout can adversely affect the quality of trapped runoff water.

To ensure that sand lenses are avoided, at least five or six test holes or pits should be dug prior to excavating the dugout. These holes should be dug around the outside and within the proposed dugout area to a depth of 4 to 5 feet (1.2 - 1.5 m) deeper than the proposed dugout bottom. They should not be located more than 30 m (100 feet) apart to minimize the possibility of missing intermittent sand layers that may occur. This testing will also identify other problems including shallow water tables, bedrock, as well as the most suitable construction equipment.



Large Scale Sealing Methods and Materials

If sand layers are general in the area and no suitable site can be found, several additional test holes or pits may be required to determine the extent of the sand layers and help determine how to seal these areas. In some cases, it may be best to abandon the site and try to locate a dugout in more favourable soil conditions. In other cases, it may be simply a matter of over-excavating the areas of concern and backfilling with expanding clay to provide the proper seal.

For larger areas, the potential for seepage must be addressed at the time of construction. If it appears that seepage will be a problem, then most sealing methods will require flatter slopes of approximately 3:1 for the sealing treatment to be applied. Consult a professional soil or water specialist if large-scale sealing is required.



Clay Lining

If a source of good heavy clay is available, it may be feasible to haul and spread the clay into the problem areas and use packing equipment to pack the material into place to form an

Figure 17 Footed Drum Packer



impermeable layer. The packing of the clay is normally carried out with specialized equipment known as “sheepsfoot” or “footed drum” packers” which are capable of exerting extreme pressures to compress the material into impervious layers. Care must be taken to compact the material in thin layers of not more than six inches (15 cm) thickness each time to ensure proper compaction is achieved. In dry soil conditions, water must be added to achieve proper compaction. Generally, six passes with a packer will achieve the proper mixing and compaction for a good seal. The thickness of the clay liner that will be required depends on the clay, but should be at least one and one half to three feet thick (45 – 90 cm).

Bentonite

Bentonite is a highly, expandable clay that is mixed with the soil and packed into place to seal the excavation. Once the dugout fills and the bentonite becomes wet, it expands and provides a very impervious seal.

Sodium Chloride

If the clay content of the soil is in excess of 20%, a sodium-bearing compound such as sodium chloride can be incorporated into the soil to produce a seal. If this practice is to be followed, soil tests are required to determine the clay content and the amount of sodium compound required.

Plastic Liners

While plastic liners are available to prevent seepage, they are expensive and must be installed according to manufacturers instructions. Some plastic liners are ultraviolet light protected and have a 10-year guarantee. For plastic liners to last longer, they must be either thicker or covered with a sand layer. To place a sand-layer on a plastic liner requires a low slope. Any tears in the liner can cause it to fail. In certain cases, air trapped under the liner can float it to the water surface. For high water table conditions, drains must be installed to lower the water table. This will prevent ground water pressure from below, lifting and floating the liner.

Gleization

In place of the traditional methods of sealing porous soils, a dugout can be sealed using a method called **gleization**. This involves covering the dugout bottom with 6 inches of chopped straw. The straw layer is then covered with 6 inches of clay and compacted into place. As the

straw decomposes under low oxygen or anaerobic conditions, a rubbery blue-grey substance is produced that seals the pores between the soil particles. Since bacteria are breaking down the organic matter, the seal takes time to develop. Water will seep out while the seal is forming.

Perimeter Trench

If the sand and gravel lenses are only located in the upper portion of the excavated area, a cut-off trench can be installed. The trench should be dug as deep as the bottom of the dugout and be extended around the total perimeter of the excavation. The trench is then filled and packed with good clay to form a perimeter seal. If the existing soil is generally high in clay content with only minor layers of sand and gravel, the material excavated from the trench can be mixed up and packed back into the trench. Since the lenses of sand and gravel are no longer continuous, the dugout will hold water. If good clay is not readily available, a cutoff curtain made of woven polyethylene fabric can be installed.

Excavating Equipment

Trackhoe

A trackhoe is a large backhoe mounted on caterpillar-type tracks for maneuverability and flotation. Due to availability, ease of operation, versatility, and speed and ease of transport, the use of trackhoes for digging dugouts has increased dramatically. Since these machines are very fast, they can remove large quantities of earth in a very short time. Also, they complete all the work from the top edge of the dugout, and do not need to crawl in and out of the excavation. Trackhoes are able to excavate the end slopes of the dugout to the same angle as the sides. They have a distinct advantage for excavating wet materials.

The main disadvantage of this type of unit is the reach of the boom, and consequently the width of the dugout that can be conveniently built. Some of the newer units, with extended booms, are able to dig dugouts 60 to 70 feet in width. Due to the shorter reach, the soil removed is piled very close to the edge of the dugout. This can lead to collapse of the banks due to the extra weight of earth. Because it is impractical to move and spread the excavated material with a trackhoe, the spoil pile presents a problem. For wider and deeper dugouts, the trackhoe can move the excavated material a second time. A better option is to use a dozer, or a large loader to move the piles of excavated soil back away from the edge of the dugout. The fill can be used in low areas or to establish dikes to control the flow of water.

Figure 18 Trackhoe


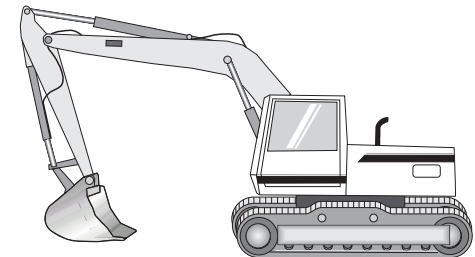


Figure 19 Dragline

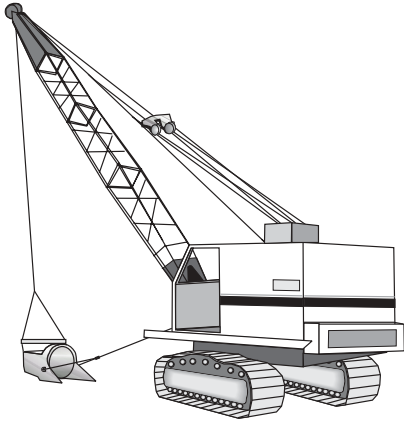


Dragline

While the dragline has been around for many years, its use in digging dugouts has declined in recent years due to the difficulty of transporting it. It is slower and less versatile than a trackhoe. Due to long reach and flotation, the dragline is ideally suited for installing dugouts in swampy or low-lying areas. Draglines can excavate dugouts up to 70 feet in width. In addition, because of the reach, spoil banks can be kept away from the edge of the dugout but as with the trackhoe, it is impractical for the dragline to move and spread the excavated material to other areas.

Scraper or Buggy

Scrapers or buggies are large units that are used to remove, carry, and deposit the earth from the dugout excavation. Buggies are mounted on rubber tires and have the advantage of being able to move large amounts of earth very quickly. They can easily move the material to other areas for landscaping and diking purposes. As the hole becomes deeper, and the soil more compacted, this type of unit may encounter problems with traction and in some cases may require a cat with a ripper tooth to loosen the soil before excavation. Track-type scraper units are slow but have better traction and can work in more varied soil conditions. The main disadvantage of these units is the need for gently sloping end-slopes to allow entry and exit from the excavation. It is recommended that these flat slopes be steepened with a trackhoe.


Figure 20 Scraper or Buggy

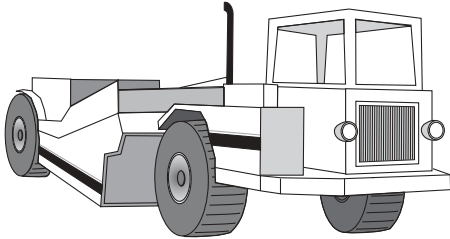

Dozer

While a dozer can excavate a dugout alone, it is a slow process and will result in large spoil piles at both ends of the dugout. Wet soil conditions can cause delays and problems for a caterpillar. However, due to its traction, it can operate in a variety of soil types. As with other scraping equipment, dozers cannot construct steep slopes on all sides. Gently sloping end-slopes are required for entrance and exit from the excavation. The end slopes should be steepened with a trackhoe.

Figure 21 Dozer

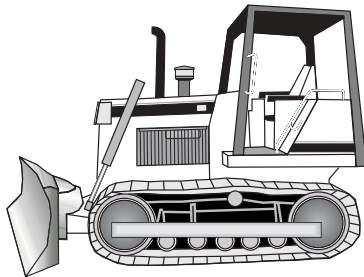

Selecting a Contractor

Experience

While digging a dugout may sound easy, how it is built will determine how long it lasts and how well it performs. For example, the slope of the sides will depend largely on soil type. The more silt or sand a soil contains, the flatter the slopes must be in order to prevent collapse. Similarly, sandy pockets or veins encountered during excavation may require sealing to prevent future leakage. An experienced contractor will recognize soil problems and inform the land-owner of possible solutions. Further technical assistance can be obtained from a soil or water specialist.

A dugout is more than just a hole in the ground.



References

A good contractor should be willing and able to provide a list of past clients. These references should be checked to see not only if the previous clients were satisfied with the work completed, but also how the dugout is operating and if any problems have arisen due to construction techniques utilized.

Equipment

The availability of equipment in the area will be an important factor in choosing a contractor. The equipment to be used should not only appear to be in good mechanical shape, but must also be appropriate for the site. The choice of the wrong equipment can lead to a very expensive dugout and one that may not be completed to your satisfaction.

Dugout Finishing

It is recommended that excavated material from the dugout be leveled, spread, and topsoil replaced. The final steps are to install any culvert inlets and trenches for water and airlines, replace the topsoil and seed grass to a buffer area around the dugout and the in-flowing runoff channels.

Costs



There is not a great deal of difference in cost between various types of excavation equipment. However, to ensure the best price available, quotations should be obtained from several contractors whenever possible. Quotations are normally given in price per cubic yard or cubic meter of material removed. If the excavated soil is to be moved and spread to fill in low areas or form dikes, the cost should be kept separate from the dugout quote. As with any quote for work, it should always be in writing to eliminate any misunderstandings. Check to see if equipment transportation costs are included in the quoted price. Depending on the type and location of the equipment, transportation costs may be a major addition to the costs of excavation.

Time factor

As with any type of contracted work, acceptable times for starting and finishing the job should be spelled out before any contracts are signed or work started. In many cases, availability of equipment will be the determining factor as most contractors are extremely busy in the fall of the year. Better prices may be possible if the work can be done in early summer, during the “off season”.

Construction Estimate



The first step is to get two or three dugout construction estimates. A sample construction estimate is provided in Figure 22 to illustrate the important information that should be obtained from a contractor. All agreements for work should be in writing and signed by both parties. Written contracts help eliminate any misunderstandings as to specifications, timing, and costs. The example is based on the Joe Agricola farm dugout that was used in the Planning Module as an illustration of the use of the Dugout Sizing Worksheets. Carefully read through the completed example. A blank copy of the Dugout Construction Estimate is included in the pocket at the rear of the manual.


Figure 22 Construction Estimate

Dugout Construction Estimate Worksheet

This worksheet lists the items that a producer should discuss with a dugout construction contractor. A clear understanding between both parties is crucial so there are no misunderstandings or false expectations. Dugouts are far more than a deep wet hole in the ground.

Dugout Owner: _____		Dugout Contractor: _____	
Address: _____		Address: _____	
Dugout Location: Qtr _____	Sec _____	Twncshp _____	Range _____ Meridian _____
Proposed Starting Date: _____		Proposed Completion Date: _____	
Proposed Dugout Use: Household _____ Livestock _____ Irrigation _____ Recreational (ie. fish) _____ Other _____			
Check Location of Underground Utilities: _____			
Pre-construction testing: Test holes or test pits to identify potential problems including sand or gravel (ie. seepage), high water tables, or shallow bedrock. No. of test holes or pits _____ Depth of testing _____			
Design Considerations for Dugout: Depth _____ Width _____ Length _____ Volume _____ Side slope _____ End slope _____			
Runoff or Flood Control: _____			
Seepage Control or High Water Table Conditions: _____			
Types of Construction Equipment: Trackhoe _____ Dozer _____ Scraper _____ Dragline _____ Buggy _____ Other _____			
Equipment Transportation Costs:			\$ _____
Dugout Construction Costs:			
(a) pre-construction testing	\$ _____/hour	x _____ hours	= \$ _____
(b) stripping top soil	\$ _____/hour	x _____ hours	= \$ _____
(c) excavation costs	\$ _____/yd ³	x _____ yd ³	= \$ _____
OR	\$ _____/hour	x _____ hours	= \$ _____
(d) seepage control	\$ _____/hour	x _____ hours	= \$ _____
(e) spread excavated material	\$ _____/hour	x _____ hours	= \$ _____
(f) dike and gated culvert inlet (ie. flood control - optional)	\$ _____/hour	x _____ hours	= \$ _____
(g) trenching water and air lines and install wet well	\$ _____/hour	x _____ hours	= \$ _____
(h) topsoil replacement	\$ _____/hour	x _____ hours	= \$ _____
(i) topsoil preparation and seed to grass			= \$ _____
Transportation and Construction Costs			\$ _____
Tax			\$ _____
Total Cost			\$ _____
Payment Schedule: _____			

Operating Systems

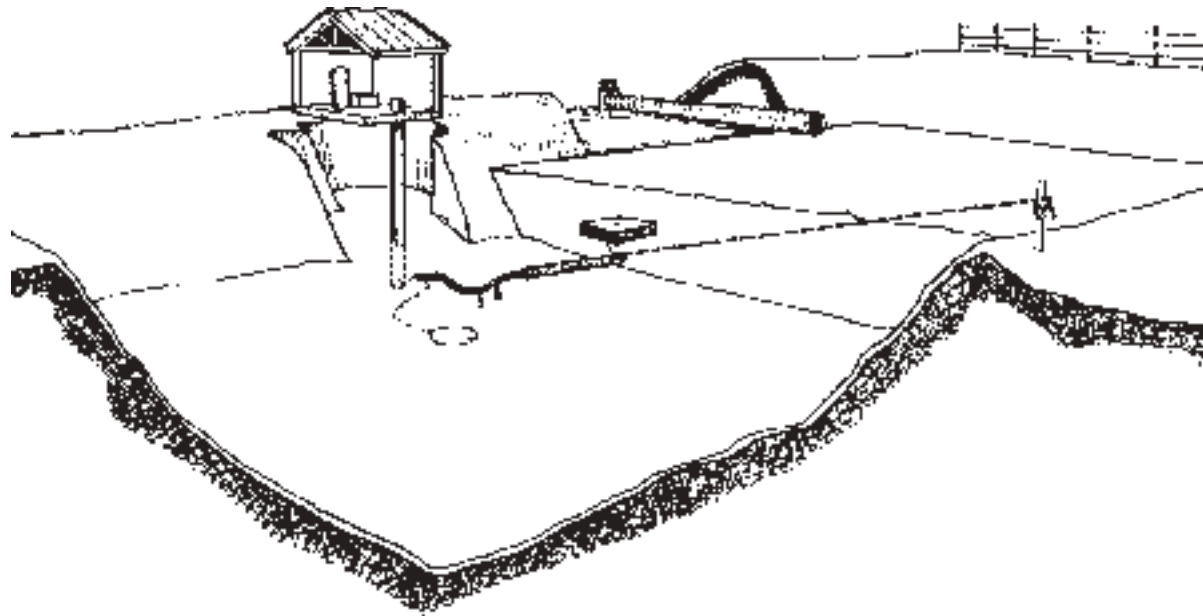

Equipment Systems

A well-designed and efficient water system is a very important part of a farming operation. Dugouts are large reservoirs of water that can be pumped at a much faster rate than most wells on the Prairies. This is only an advantage if the water intake, pump, and water distribution lines are sized to meet the peak demands of the farm. Dugout aeration systems can make a dynamic improvement in dugout water quality. Remote watering systems that pump out of pasture dugouts, help protect livestock from illness and injury as well as improve water quality and livestock production.

Intake Systems

Research has shown that water in the top four to five feet of a dugout is of higher quality than water at the bottom and edges of the dugout. It has also shown that many farm dugouts become depleted of dissolved oxygen resulting in black smelly water. For these reasons, floating, water intake systems are recommended for all farm dugouts.

Floating Intake Systems

For the past 20 years, floating, water intake systems have been used in dugouts. The floating intake draws the better quality water from near the dugout water surface. These systems are usually installed with a wet well beside the dugout which contains a submersible pump. However with jet pumps, the intake assembly hooks directly to the suction line, and a check-valve is installed next to the pump. This eliminates the need for a wet well. Whatever the chosen system, it is recommended that intakes be planned and installed at the time of dugout construction. Floating intake systems include the components shown in Figure 23.

Figure 24 shows a submersible pump and intake system. Install the intake pipe inside another larger pipe where it enters the dugout. This will protect the intake line from possible damage or collapse during back filling of the intake pipe trench. The perforated intake pipe supplies water to a wet well located beside the dugout. The water flows by gravity as water is pumped from the well. Since plastic pipe is lighter than water, small concrete weights must be secured along the intake pipe. Generally, medium density 75 psi CSA rated pipe is recommended for the intake line. Install the dugout air line in the same trench as the intake line. This installation will protect the air line from freezing.

Figure 25 shows a plan view of a dugout and the intake installation. The intake pipe should enter the dugout on a 45 degree angle to reduce the chances of kinking when the intake is pulled to shore for maintenance

Figure 23 Floating Intake

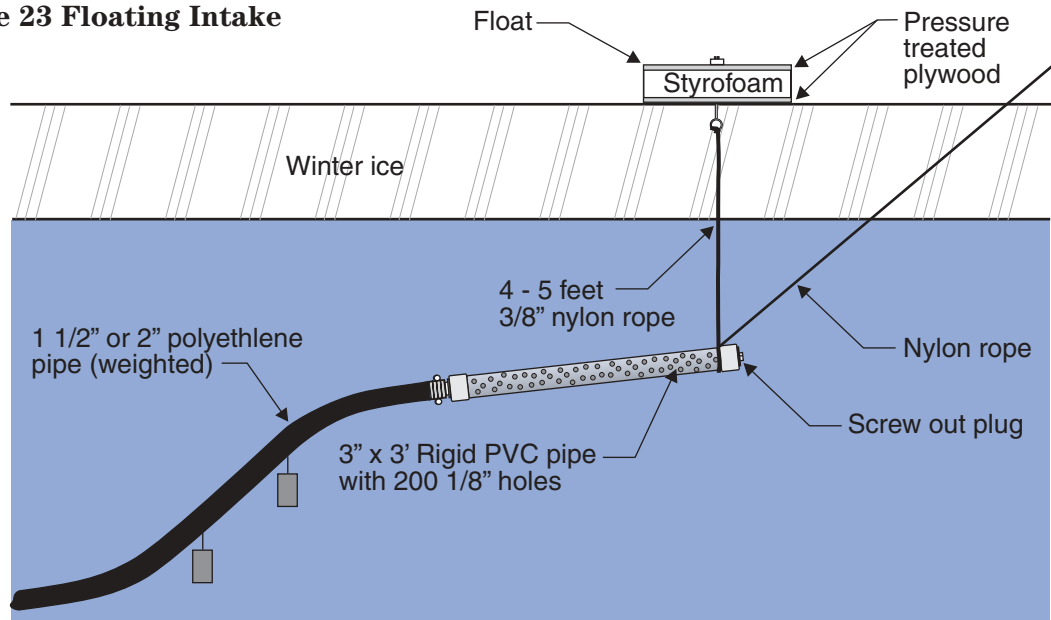


Figure 24 Submersible Pump and Intake System


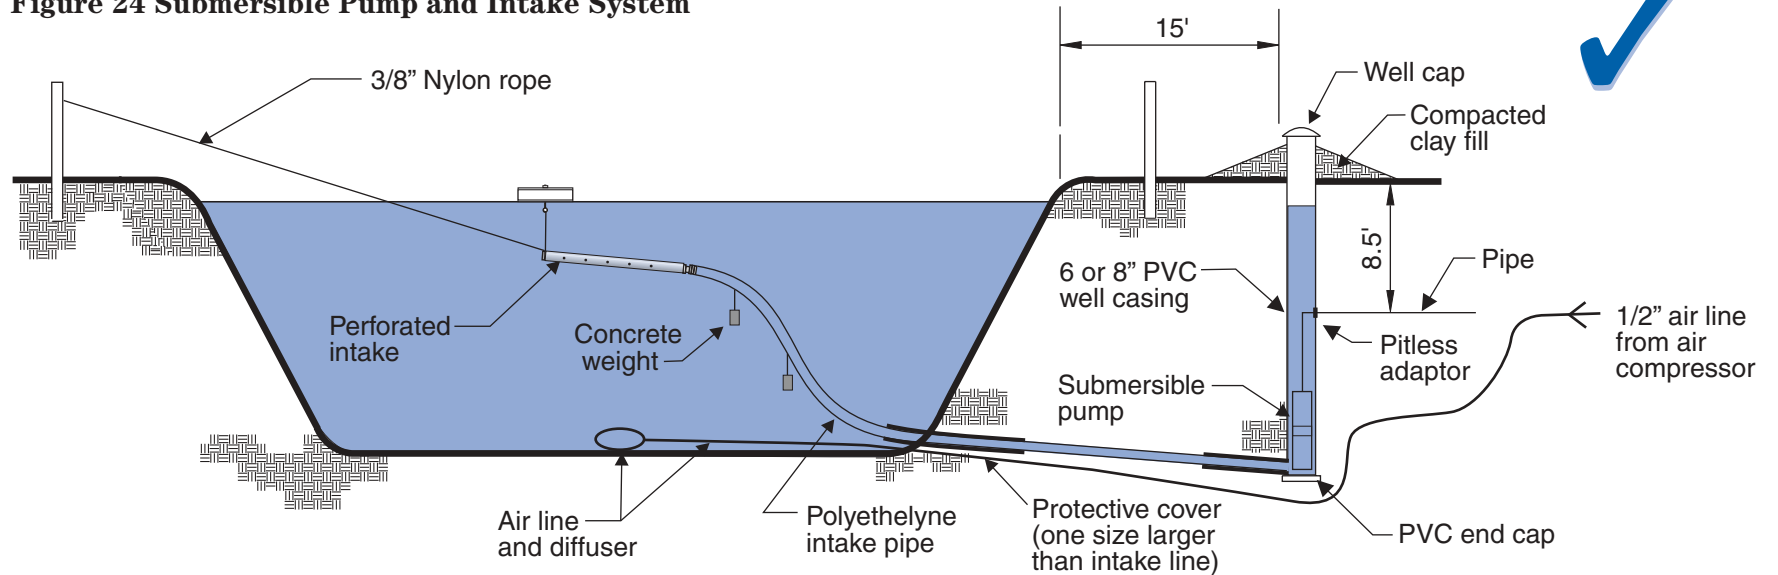


Figure 25 Plan View of Intake System

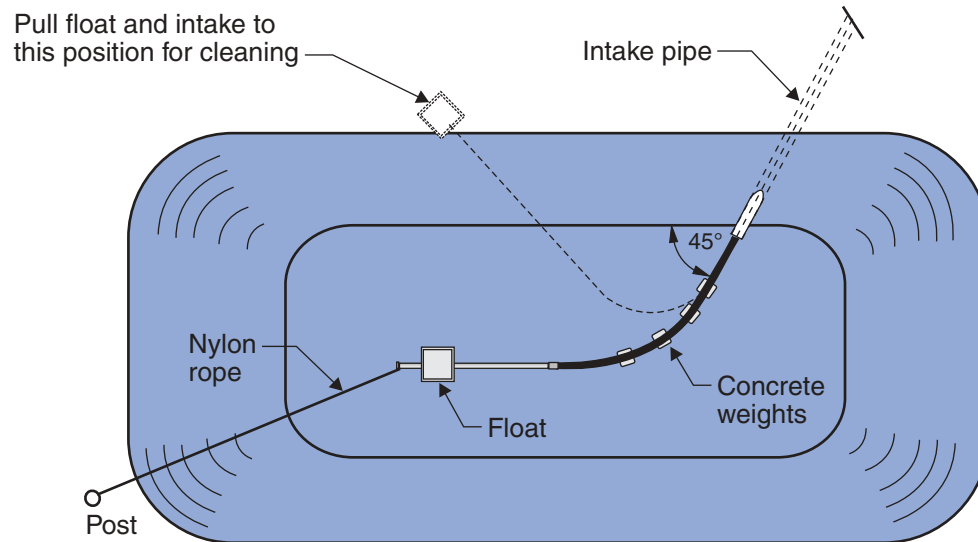

Other Intake Systems

Over the years, other types of water intake systems have been tried for dugouts. They are not recommended. Two common but unsatisfactory systems are:

Gravel infiltration trenches

Gravel-filled trenches between the dugout and a wet well beside the dugout have been unsuccessfully tried in the past. **They are not recommended.** The trenches can be effective filters for several years but will eventually fail due to plugging of the spaces in the gravel with soil, plant material, microorganisms, and biofilms. Flows to the wet well are inevitably reduced. Due to high levels of biological activity in the trench, oxygen levels fall which leads to the release of hydrogen sulphide gas. These conditions produce black smelly water in the wet well. It is also common to see a ten-fold increase in total dissolved solids, and greatly increased problems with iron, manganese, and hardness due to leaching of dissolved minerals from the gravel material. The only solutions are re-excavation and replacement of the gravel every few years, or replacement with an intake pipe.



Dugout bottom intakes

Large 4 to 12 inch (10 to 30 cm) horizontal piping has been used to convey water from the bottom of the dugout to a wet well. Although these systems do not plug, poor water quality is a problem. Unless the dugout is continuously aerated, the poorest water quality is always near the dugout bottom. Large open-ended pipes often result in water bugs entering the wet well, pumps and distribution system. In some cases, bugs can plug impellers on pumps and screens. Avoiding this problem requires installation of screens around the dugout intake or the pump intake in the wet well.



Wet Wells

A wet well is usually required beside the dugout to permit easy access to the pump. The water flows by gravity into the wet well as water is pumped from the well. For many years, two to three foot diameter, steel culverts were used for wet wells. Large diameter wells allow for some settling of solids to take place. However, recent monitoring of these installations has shown that dissolved oxygen levels are much lower in the wet wells than in the dugout water. The reasons for this include the large water storage capacity of wet wells and slow replenishment with fresh dugout water. Conditions in these wells can be similar to those that develop in gravel trenches: hydrogen sulfide gas formation, lower pH, and a high concentration of nutrients at the bottom of the wet well.

To avoid the problems associated with a large diameter wet well there are several options:

- Hire a vacuum-truck to come in every few years and suck out the black decayed plant material and sediment at the bottom of the wet well.
- It is very important that vacuum equipment be clean. A dirty hose can contaminate the well.
- For jet pump installations, elimination of the wet well is desirable with the intake assembly installed directly below the float in the dugout.
- For new submersible pump installations, a smaller diameter, 6 to 8 inch (15 – 20 cm) PVC well casing and pitless adapter are the best option. The smaller diameter PVC casing can also be installed inside an existing larger wet well. A smaller well has a steady supply of fresh dugout water and thus eliminates the poor water quality associated with larger wet wells. The PVC casing will last much longer than steel culverts, which eventually corrode.



Pumps

There are many types and sizes of pumps for dugout water systems. Some are designed for drawing from the water source only. Others draw the water and force it through the rest of the distribution system. Some pumps are used for special purposes such as boosting pressure or supplying a special outlet. Therefore, it is important to select the proper type and size of pump for the application.


The most common pumps used for dugout applications systems are shallow well jet and submersible pumps. Shallow well jet pumps have a suction lift of approximately 20 vertical feet (7 meters), including friction losses. Once water has been lifted to the pump, it can be pushed to higher elevations. Jet pumps can be installed away from the dugout in the basement of a house, heated shop, or pump house. Ensure that the suction line is adequately sized. Jet pumps require a larger intake pipe than submersible pumps but save the cost of running electrical power to the dugout. Jet pumps are not as efficient as submersible pumps and are more suited for supplying smaller volumes of water for rural residences.



A submersible pump can lift water hundreds of vertical feet. It operates like a shallow well pump but has a number of impellers or stages mounted close together on a shaft. Generally, because of the low lift required for dugout applications, a pump with six to ten stages or impellers will supply all the pressure required. The most common size of submersible pump is 4 inches (10 cm) in diameter. These pumps are available in 1/2, 3/4, 1 horsepower and larger.

The pumps are placed in a wet well beside the dugout. Generally a small heated pump house is set over or beside the wet well to house the pressure tank, pressure switch, electrical controls and any other dugout pumping or aeration equipment. See Figure 26.

A rural water system requires a pressure tank. Pressure tanks store water and maintain water pressure between specified limits. As the water in the tank rises, air is compressed until the upper limit or cut out point is reached and pumping stops. When a valve is opened, the compressed air in the tank acts like a spring and forces water to flow into the system. Demands on the water supply cause the tank pressure to fall until the lower limit or cut in point is reached and the pump restarts. Without this buffer, the pump will start each time a small amount of water is drawn. Constant starting and stopping causes unnecessary wear on a pump. A 30 to 50 psi pressure switch is most common for farming operations.

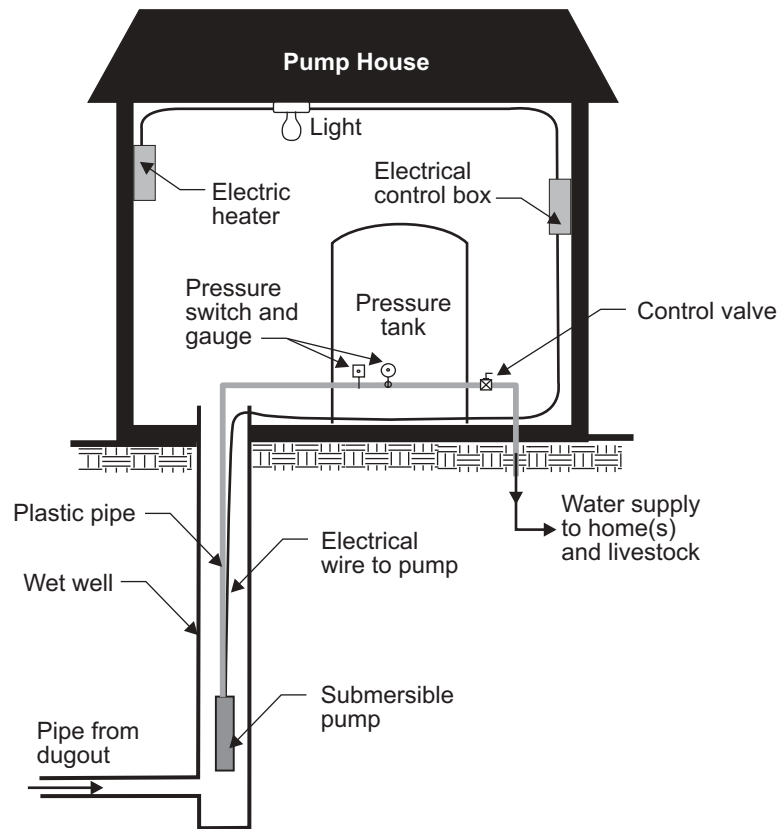
Figure 26 Submersible Pump, Wet Well, and Pressure Tank

There are four types of pressure tanks as follows:

- Plain galvanized steel tank
- Plain galvanized steel tank with floating wafer or disk
- Diaphragm tank, pre-charged with air
- Bladder tank, pre-charged with air.

For dugout applications, it is best to have a sealed air diaphragm or bladder tank for submersible pumps as shown in Figure 27.

Figure 27 Sealed Air Diaphragm Pressure Tank

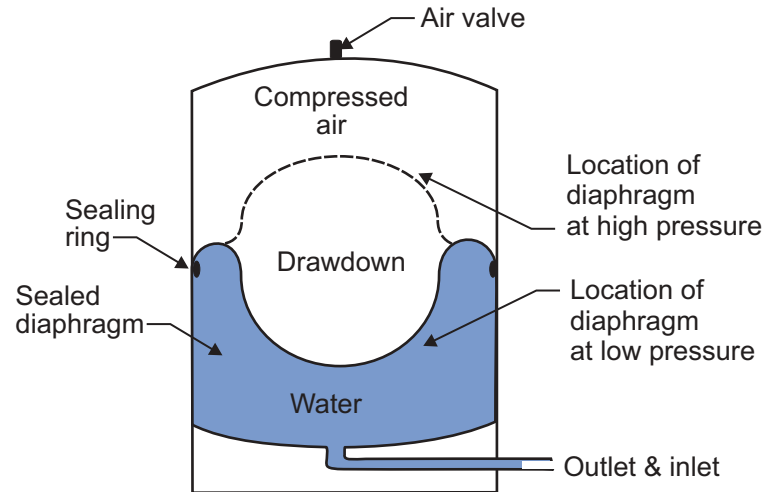

Dugout water has little dissolved gas and can absorb the air in a plain galvanized steel tank. When most of the air is gone from the tank, it is said to be waterlogged. This is like not having a pressure tank and causes premature wear of the pump motor. If a tank has no bladder or diaphragm, waterlogging can be avoided with regular addition of air to the tank. An air volume control can be added to jet pumps to add air to less expensive steel or floating wafer tanks.



The size of the pressure tank is also important. Select a pressure tank that has at least one gallon of drawdown between low and high pressure, for each gallon per minute (**gpm**) of pump capacity. For example, a ten gpm pump requires a pressure tank with ten gallons of drawdown.

Water Distribution System


The water distribution line should be sized to effectively supply the required amounts of water and pressure throughout the system. As a rule of thumb, try to maintain no more than a five pound per square inch (**psi**) pressure loss due to friction, throughout the system.

For dugout applications generally 75 – 100 psi, CSA approved, polyethylene pipe is suitable for underground burial and general use in the water distribution system. Polyethylene pipe comes in low, medium, and high density. Low-density pipe is recommended because it is more resistant to damage, more flexible, and easier to join.

For pipe connections, it is best to use fittings that will not corrode from the water or contact with corrosive soil in an underground trench. Nylon, plastic or brass fittings are recommended. Use 100 percent stainless steel clamps for all connections and double clamp underground connections.

Figure 28 continues the example of the Joe Agricola farm to illustrate pump, pressure tank, and water pipe sizing for farm dugout, water distribution systems. Carefully work through the complete example contained in the pocket at the front of the manual. Blank worksheets for sizing the components of your water distribution system are contained in the pocket at the rear of the manual.

Figure 28 Water System Sizing Example

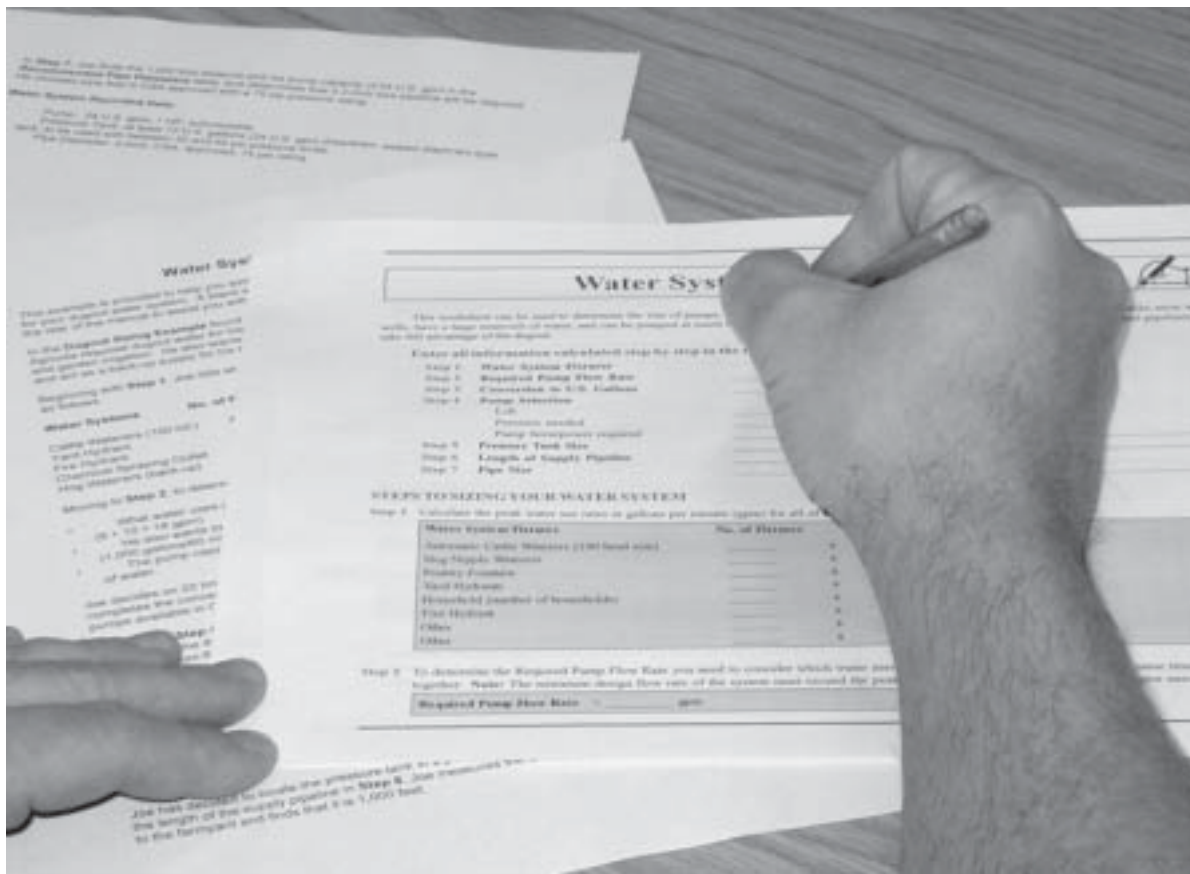

Dugout Aeration Systems



As previously outlined in the Understanding Prairie Dugouts Module, Biology of a Dugout section, an important part of maintaining water quality is ensuring that the level of dissolved oxygen in the water stays high all year round.

Under natural conditions in a dugout, oxygen exchange with the environment is not sufficient. In summer, a layer of warm water forms on the surface and floats on a layer of deeper, cooler water. The layer of cold water, having no contact with the atmosphere, becomes depleted of oxygen. Under low-oxygen conditions, plant nutrients, metals, and swamp gases are released from the dugout sediments and held by the cold water layer.

In fall, air temperature and the surface waters of the dugout cool rapidly. When the surface reaches the temperature of the cooler, bottom layer, the dugout ‘turns over’. This means that the water in the dugout is no longer stratified and wind mixing of all the dugout water occurs. Nutrients and unwanted compounds become evenly distributed throughout the water.

During winter, ice cover prevents the transfer of oxygen from the atmosphere to the water. When oxygen is depleted, microbial activity in the sediments again begins to release unwanted compounds. One of these compounds, hydrogen sulfide, produces the rotten-egg smell that often develops in small water bodies in late winter.

The ice melts in spring, the surface warms, and the water mixes completely distributing the unwanted compounds throughout the water. Dissolved nutrients become readily available to plants and algae near the surface. As the air temperature increases, the cycle begins again.



In order to prevent this cycle of low-oxygen conditions from developing, supplementary aeration is required. This adds oxygen to the water and ensures complete mixing of the water so that contact with the atmosphere is maximized. Research has shown that dugouts should be aerated 24 hours per day, year round.

Types of Aeration Systems

Many types of aeration systems have been tried over the years including electrical, wind-powered, and solar-powered systems. Where possible, electrical systems are always preferred, but for remote locations, other power sources are required. All systems have advantages and disadvantages.

Wind-powered systems can be effective in low-sunlight winter conditions but only in areas where winds are relatively constant. Solar systems are very portable and work best in hot sunny conditions coinciding well with peak demand for water. Producers should try to find options that suit their operations and their geographic area.

Some floating systems are available but research indicates that these systems are not very practical or effective for prairie dugouts.

Components of an Aeration System

There are four components to an aeration system:

- power supply
- air compressor
- aeration line
- diffuser.

Power supply

As with pumping systems, aeration can be powered by electricity, solar power, or wind. For dugouts stocked with fish, use an electrical type compressor, as it will provide a continuous supply of dissolved oxygen. This is crucial for fish survival in a dugout. Windmill type systems may not pump sufficient dissolved oxygen for fish survival during low wind conditions at night or during hot calm periods in summer.

Air compressors

Bank-mounted windmills use a diaphragm-type pump that pushes air into an aeration hose that extends to the bottom of the dugout. Windmills are suitable for areas with good wind conditions and for remote sites where electrical power is too costly to install. However, they perform poorly on sites where winds are obstructed by hills or trees, water is deep (over 20 feet), or there are high concentrations of organic matter in the water.



The most common types of electrical compressors are the oil-less diaphragms or piston pumps. These compressors are quiet, relatively inexpensive to purchase and operate, and require little maintenance. When choosing a pump, make sure it is rated for continuous use. As a rule, a diaphragm-type compressor that pumps approximately one cubic foot per minute (**cfm**), for every million gallons of dugout water is adequate. For best results, locate the compressor in a heated building or enclosed box to protect the motor, diaphragm, and electrical supply.

Aeration Lines

Aeration lines convey air from the pump to the dugout. For new dugouts, the aeration line should be buried with the water intake line. This will prevent damage from frost, ultraviolet light, ice, and animals.


Diffusers

A diffuser is a device to release air into the water. Research has shown that the type of diffuser is very important. Diffusers that create fine to medium-sized bubbles are more efficient at circulating and aerating water than open-ended hoses that produce large bubbles. An open-ended hose requires three times the volume of air to saturate water with dissolved oxygen compared to an air stone or perforated hose. Proper location of the diffuser maintains oxygen levels from top to bottom, as shown in Figure 29. Recommended types of diffusers are:



- Air stone
- Linear, fine bubble diffuser
- Membrane diffuser.

Figure 29 Aeration System

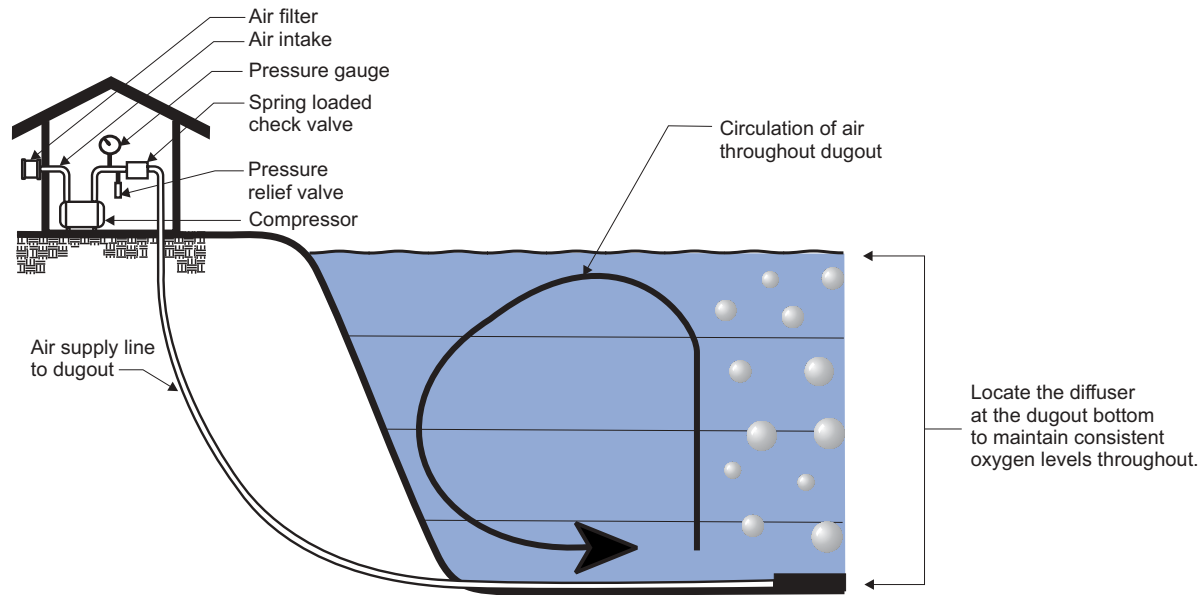

**Figure 30
Airstone Diffuser**



**Figure 31
Linear Diffuser**



**Figure 32
Membrane Diffuser**





Safety

During winter, dugout aeration systems can result in open or weak areas in the dugout ice. These conditions can be very dangerous for young children, pets, and people snowmobiling at night. It is essential to educate your children about these hazards and post the area with highly visible warning signs and fluorescent snow fence around open water areas.

Pasture Water Systems for Livestock

Today, livestock producers want to provide a safe, reliable supply of good quality water for their livestock. They also want to better utilize their pasture dugouts. Direct watering of livestock from dugouts causes a number of environmental, herd health, and pasture utilization problems:

Problems with Direct Watering

Direct access watering has a negative effect on water quality, herd health, and the lifespan of the farm dugout:

- Fecal pathogens are directly added to the water allowing for rapid spread throughout the herd. Problems may also arise due to pathogens causing footrot.
- Nutrient loading from excrement will lead to proliferation of algae populations and in some cases the production of toxins from cyanobacteria.
- Oxygen depletion results from the biological breakdown of excrement.
- Destruction of side-slopes from hoof action speeds sedimentation and shortens the life of a dugout.
- Cattle are sensitive to taste and odour in water supplies, and may limit their intake of less palatable water, possibly leading to reduced feed conversion and productivity.



There is enough dissolved phosphorus in the manure from one cow in one day to cause an algae bloom in 265,000 gallons (over 1,000,000 liters) of water.

The amount of oxygen needed to decompose the manure from one cow for one day will deplete all the dissolved oxygen in 8,000 gallons (over 30,000 liters) of water.

Options to Direct Watering

Some of the most common livestock watering alternatives involve complete exclusion of animals from the water source:

- Water hauling
- Gravity-fed reservoirs
- Pumped gravity flow reservoirs
- Animal-operated pasture pumps
- Pipelines from nearby water sources
- Gas powered pumping and generator systems
- Solar-powered pumping systems
- Wind-powered pumping systems
- Flowing water driven pumps including sling pumps, paddle pumps, and hydraulic ram pumps
- Air compressor pumps.

Many producers are also looking at winterizing their pasture water systems so that the pasture season can be extended and winter feeding done on pasture.


Remote Watering Equipment

Essentially, a watering system requires a water source, a pump, storage of either water or power, and a watering device. Today there is a variety of livestock watering methods available to suit any type of pasture and location. The power options to move water to livestock include solar, wind, fuel, stream flow, main line electricity, and gravity flow. Selecting the most appropriate one can be a challenge. Establish a list of priorities and try to use some of the natural advantages of the site and equipment. Figure 33 illustrates an example of a solar powered watering system.


An effective and well-planned pasture water system is a very important part of all livestock grazing plans. Planning for remote watering of livestock, at the same time as planning for dugout construction and operation, is recommended.



Figure 33 Solar Watering System

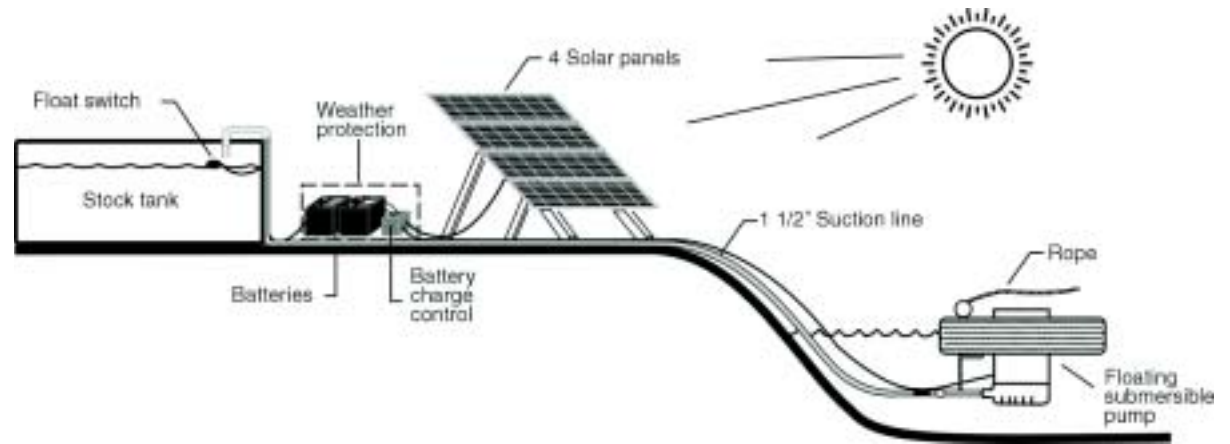

Water Quality for Domestic and Drinking Water Supplies

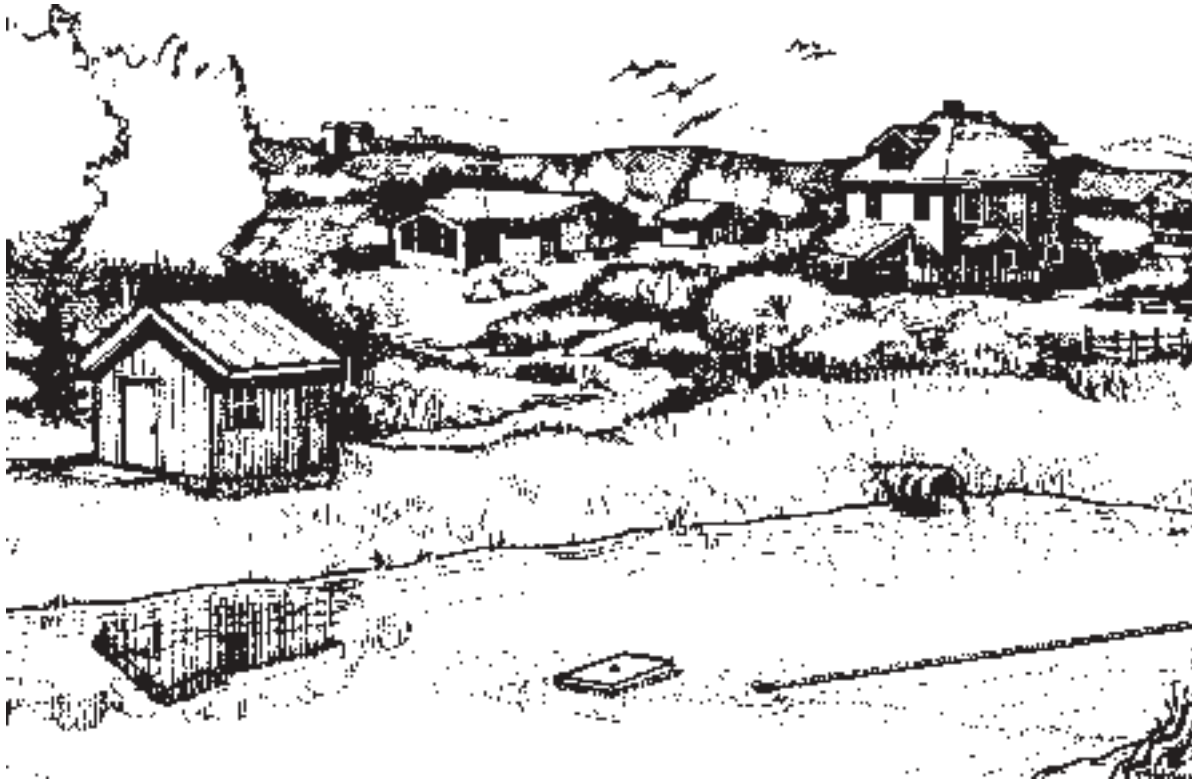



Domestic and drinking water supplies have higher quality requirements than most other uses. Water that appears to be acceptable based on visual appearance, taste, odour, and colour may contain contaminants that affect human health. Risks can be chemical or microbiological. It should be remembered that water that has been successfully treated for human consumption might become re-contaminated and present real, health risks. Re-contamination sometimes occurs in the distribution system.

On the other hand, water that is otherwise harmless may have such objectionable appearance, taste, and odour that it is unacceptable for household use.

Health Risks and Water Quality

On first appearance, water would appear to be a relatively simple liquid. It is, however, a powerful solvent that is capable of containing a very complex mixture of chemical substances. Water also provides a suitable medium in which a diverse range of microbiological organisms can exist. The presence of various chemical constituents and microscopic organisms in water may impact upon human health.

Microbiological Factors

There are three major groups of microbiological organisms that cause waterborne diseases:

- Bacteria,
- Protozoa , and
- Viruses.

Examples of each of these three groups of pathogenic organisms are given in Appendix 2, Water Quality Guide, Table 1, Cause and Symptoms of Some Water Born Diseases, along with the symptoms of the resulting disease. It should be noted that all of the symptoms listed for a particular disease are not always observed. It should also be noted that this list is not exhaustive but contains examples of microscopic organisms that have been linked with waterborne diseases in the past.



In many cases, the association of a disease outbreak with exposure to contaminated water is not recognized. Many of the symptoms that are exhibited in some of these diseases are attributed to other factors such as the “flu” or food poisoning. As such, many cases related to waterborne disease are

never reported to health officials and therefore available statistical data are understated. The number of people contracting diseases from the consumption of contaminated drinking water is conservatively estimated to be between 900,000 and 3,000,000 each year in the United States.

In Canada, notifiable disease statistics are the responsibility of each province and considerable variation exists in the manner and completeness with which this information is collected. Consequently, the number of individuals affected by waterborne diseases is not known in Canada. If one assumes a similar rate of occurrence for waterborne diseases in Canada, between 90,000 and 300,000 Canadians may be affected annually by water contaminated with microbiological organisms.

In many cases where disease outbreaks have been linked to drinking water, the cause is never determined. In the U.S. from 1991 to 1998, the identity of the agent causing waterborne disease outbreaks was not determined in 40% of these cases.

Bacteria

Most bacteria found in water do not cause diseases in humans. Types of bacteria that do cause disease are found in the intestinal tract of warm-blooded mammals, including humans. These bacteria are excreted in waste matter and may be carried into water supplies.

Seepage from septic tanks and sewage lagoons, plus runoff from livestock feedlots, pastures, and cropland to which manure has been applied may contain bacterial contaminants. Similarly, fecal matter may also be introduced from rodents, birds, and other wildlife. Surface water supplies are therefore highly susceptible to bacterial contamination.

Once bacteria have entered a water supply, they may continue to reproduce, thereby maintaining or even increasing the degree of contamination. Surface water supplies that are largely immobile, like dugouts, provide an excellent breeding ground for bacteria.

Protozoa

Protozoa are a group of microscopic parasites that are frequently present in surface waters. Some protozoa, notably giardia and cryptosporidia, exist in the form of cysts. The protective covering of the cyst permits the parasite to survive harsh environmental conditions. The cyst also protects the parasite against disinfectants such as chlorine. Once ingested, the parasite germinates and reproduces. Encysted parasites may subsequently be evacuated from the animal or human host through the feces.



Floodwater usually contains high levels of bacteria.




Cryptosporidia and giardia have been suggested as the causative agent in approximately 60% of reported waterborne disease outbreaks in the US between 1991 to 1998. Giardia are found in feces from humans, beavers, muskrats, and dogs. Cryptosporidia have been found mainly in fecal matter from cattle, sheep, and pigs. However, they have also been detected in the feces of humans and other mammals. Contamination of water supplies occurs when fecal matter containing the parasites is deposited or washed into the water.

Viruses



Relatively little is known regarding the incidence of diseases resulting from waterborne, viral organisms. However, a number of different waterborne viral agents have been found in contaminated water supplies and linked to disease including hepatitis A, rotavirus, Norwalk agent, over 30 types of adenoviruses, and over 70 types of enteroviruses.

Figure 34 Relative Sizes of Pathogenic Organisms

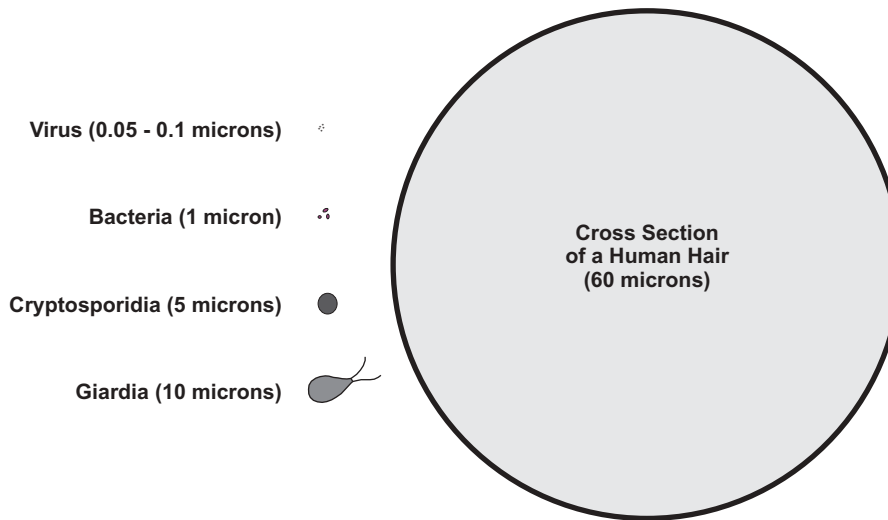

Chemical Factors

There are a number of chemicals that can pose a human health risk. In some cases, these materials are naturally present in water through weathering and erosion. In other cases, human activities result in the introduction of these chemicals into water.

Chemicals that potentially have an adverse effect upon human health include naturally occurring minerals, metals, and toxins as well as a variety of synthetic, organic chemicals including many different types of pesticides. A list of the various chemicals, their source, and their adverse health effects are listed in Appendix 2, Water Quality Guide, in Table 2, Chemicals and Their Associated Risk to Human Health.

If you suspect that your water contains elevated levels of naturally occurring chemicals, or if you believe that your water has become contaminated, specific tests may be performed in a laboratory. There are numerous laboratories with a diverse range of analytical testing capabilities located in each province. Contact your regional health authority to obtain contact information for water-testing laboratories.

Aesthetics and Water Quality

Numerous chemical compounds and microbiological species affect the aesthetic quality of water. Certain species impart an objectionable taste or odour to water while others may cause staining or leave behind a residue or solid precipitate. These chemical agents and microbiological species are generally regarded as nuisances that typically do not pose a risk to human health. The most commonly encountered nuisance water problems are summarized in Appendix 2, Water Quality Guide, Table 3, Chemical Agents and Microbiological Species Affecting Aesthetic Quality of Water. The source of the nuisance impurities and organisms are listed along with the symptoms typically observed as a result of their presence in water. The presence of these impurities and organisms can be confirmed by laboratory tests. Once their presence has been determined, appropriate steps may be taken to eliminate or minimize the associated problems.

Standard Testing of Drinking Water



Regular testing of water is necessary to monitor the effectiveness of a treatment system. From the point of view of health and safety, microbiological testing of water is of prime importance.

Figure 35 Saskatchewan Health Provincial Lab



Testing for Coliforms

Coliform bacteria are commonly found in the environment. While most of these organisms are not harmful, their presence is an indicator that other harmful or pathogenic micro-organisms may be present. An assumption is made that if coliform bacteria are absent, then pathogenic bacteria are also probably absent. Similarly, if coliform bacteria are present, it is assumed that pathogenic organisms are also present. Therefore, in public water supplies, the presence of coliform bacteria indicates either a problem with the water treatment system - inadequate disinfection for example, or within the distribution system - a break in water pipes perhaps. Similarly, the presence of coliform bacteria in private water supplies may be indicative of a contaminated water source or a faulty treatment system.

Most water-testing laboratories in Canada, and for that matter many other countries, perform what is known as the analysis for total coliforms. This test is used to indicate the presence of a diverse group of bacterial organisms. In some test procedures, an estimation of the quantity of bacteria present is determined, and listed as the number of colony forming units per milliliter of water tested. However, other tests simply indicate the presence or absence of coliform bacteria.

If a water sample is found to contain coliform bacteria, the next step is to determine whether any of these bacteria are due to fecal contamination. This is generally done by testing the water for fecal coliforms or specifically for *E. coli*. The presence of fecal coliforms or *E. coli* indicates that the water is contaminated by either human or animal waste. Micro-organisms from these wastes can cause diseases.

It must be emphasized that if a water sample is positive for total coliforms but does not contain fecal coliforms or *E. coli*, the sanitary quality of this water is still considered unacceptable. If coliform bacteria can survive, there is the potential for pathogenic micro-organisms to exist in the future.

Suspended particles or cloudiness in water is a potential indicator of water contamination and may indicate problems with treatment processes. Highly turbid water also reduces the efficiency of disinfection processes such as chlorination and UV treatment. The amount of suspended particles or cloudiness may be measured as a turbidity test. Municipal and community water supplies typically monitor turbidity on a routine or continuing basis.

In 1989, the Mistahia Health Unit, formerly South Peace Health Unit, located in Grande Prairie, Alberta conducted a survey of bacteria levels found in local farm dugouts. Health Unit staff reviewed the results of bacteriological analysis conducted on raw (untreated) dugout water samples from the 1960s to 1989.

Bacteria Found	Samples Containing Bacteria
Total coliform	31.5%
Fecal coliform	23.7%
Total bacteria population (>500)	1.2%
Confluent growth (unidentified bacteria)	1.7%
Meets Canadian Drinking Water Guidelines (1989)	41.9%
Total water samples tested	578
Note: Information provided by Elmer Spilchen, Public Health Inspector, Grande Prairie, Alberta.	



Water testing is done for indicator bacteria rather than a number of individual species.

The survey results indicate that dugouts are at risk of contamination with bacteria, and confirm the need for effective treatment of dugout water to be used for household purposes.

Pitfalls of Standard Water Testing Techniques



If a treated municipal drinking water supply is found free of coliform bacteria, it is generally assumed that the water treatment process is working adequately and that the distribution system is functioning properly. While most pathogenic bacteria and viruses are destroyed by disinfection, some organisms such as cryptosporidia and giardia may not be inactivated. Therefore, an acceptable result for coliform bacteria does not guarantee that all pathogenic organisms have been eliminated. Furthermore, an acceptable result for coliform bacteria on an untreated water supply such as a private well or dugout does not indicate anything regarding the presence or absence of protozoa or viruses.

Non-routine Testing of Drinking Water



While there are numerous laboratories that have the capability to test for coliform bacteria, total and fecal, as well as *E. coli*, relatively few have the capability to test for specific pathogens such as cryptosporidia, giardia, and various viruses. Many environment and health officials do not recommend routine monitoring of drinking water supplies for cryptosporidia and giardia due to the complex and expensive testing methods and the widespread existence of these protozoans in surface water. Instead of monitoring for protozoans, many agencies have preferred to focus on ensuring that adequate treatment procedures are in place for public and private water supplies and that best management practices are observed in the watershed.

Very few laboratories have the capability to test water routinely for viruses. This is mainly due to the lack of established testing procedures for many viral organisms. A second factor is that most laboratories perform microbiological testing on a very large number of samples. Testing all of these samples for even a small number of viruses would be practically impossible. This type of testing is normally only performed on the drinking water supplies of larger municipalities.

General Testing Recommendations



It is impossible to test a water sample for all known pathogens. It is also very expensive to test for a large number of different pathogens. Many health agencies have designated total coliforms as a standard indicator test to determine the bacteriological safety of drinking water. It is recommended that drinking water derived from a privately operated source such as a well or dugout should be tested at least twice a year for bacterial safety. More frequent testing may be necessary if contamination is suspected or unexplained illness occurs. If continuing illness is observed, use of the water should be discontinued until a sample has been tested.

Water Treatment for Domestic Water Supplies



Water Treatment Systems

Water treatment is essential for all dugout water supplies used for household/drinking purposes.

Water treatment involves a series of separate treatment processes in a standard sequence to produce a safe and aesthetically acceptable product. This sequence of treatment processes improves the quality of the water with each step, providing a multi-barrier, water treatment system. For surface water supplies, treatment must include steps to remove particulate and organic matter, followed by disinfection. Water treatment equipment can be expensive and always requires good maintenance practices to operate effectively over the long-term.

Surface runoff is usually high in particulate matter and plant nutrients. Algae and weed growth can be significant, particularly during the summer months, and dugouts generally have high levels of organic matter. While disinfection is an essential part of the water treatment process, high organic carbon levels can react with the disinfectant, producing potentially harmful by-products. The reduction of organic matter prior to disinfection is therefore an important step in the treatment process to produce biologically and chemically safe water.

Traditionally for domestic use, dugout water treatment has consisted of either no treatment at all, or a combination of chlorination, rapid sand filtration, and/or granular activated carbon filtration. These types of treatments, by themselves, have not been successful at producing a high water quality product over the long-term. Water produced from this type of treatment system should only be considered utility water and should not be consumed. While these processes can be effective to some extent, more effective pre-treatment is essential.



If you are not going to adequately treat water, then haul good quality water for household purposes.

Point-of-entry (POE) systems treat all the water as it enters the house.

Point-of-use (POU) devices treat small amounts of water at the tap.


Figure 36 shows a schematic of two effective systems for treatment of dugout water as it enters the house. These systems are called ‘point-of-entry’ (POE) treatment systems. The first system includes chemical coagulation, filtration, and disinfection. The second system includes slow sand and biological activated carbon filtration followed by disinfection. In both cases, a final barrier such as a reverse osmosis membrane (RO) or distiller for drinking water, cooking water and water for brushing teeth is added. This final barrier is called a “point-of-use” (POU) water treatment device. This type of treatment following point-of-entry treatment is referred to as ‘polishing’. Polishing devices are designed for use on high quality treated water and are not capable of treating raw dugout water.

An effective in-house treatment system should be represented by one of the configurations in Figure 36. Other technologies, such as micro filtration, may be used to replace some of the processes identified in Figure 36 if they are properly designed and operated.

The treatment processes described can effectively treat most dugout water. Effective systems are designed to treat specific water problems. Therefore, dugout water should be tested before designing the system. Water problems that are not typical of dugouts may require system modifications.



Figure 36 Surface Water Treatment Steps

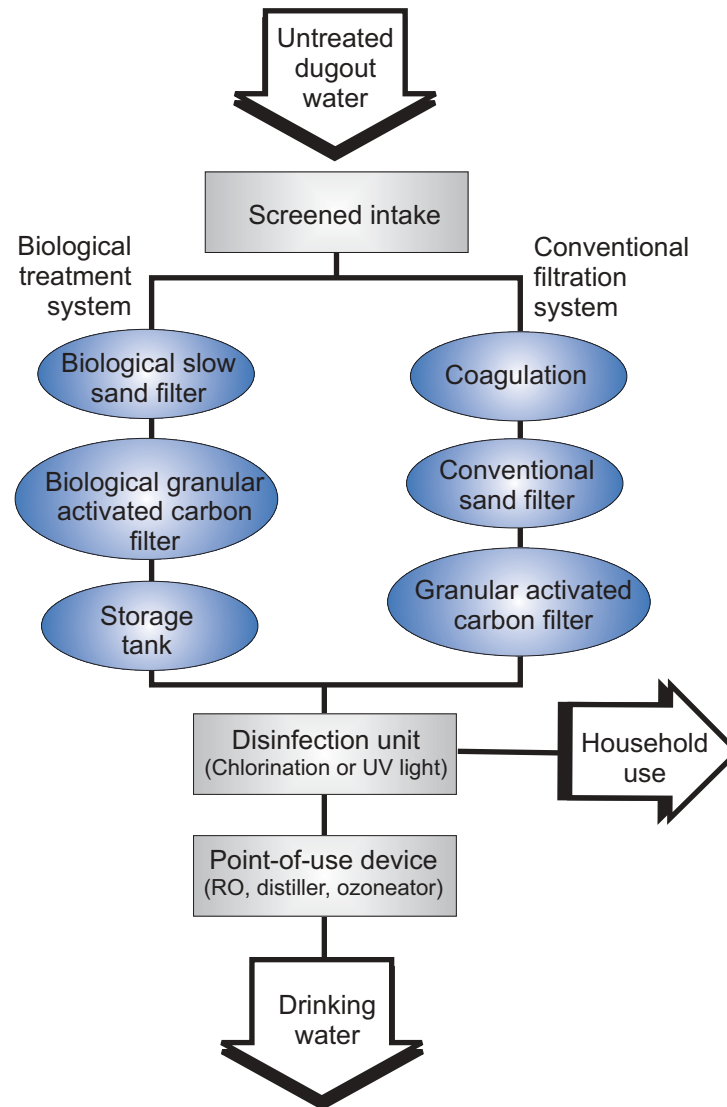

Steps in Water Treatment

The recommended systems, figure 36, consist of several consecutive steps. As previously discussed in the Planning Module, the first step in a multi-barrier water treatment system is protection of the source water.



Screened Intake

A screened intake in the dugout is recommended as a pre-treatment to sieve out larger particles including algae, as well as reduce high turbidity.

Coagulation

Coagulation is a chemical process that can reduce turbidity, dissolved organic compounds, and colour. The chemicals most often used for coagulation are aluminum sulphate, ferric chloride, ferric sulphate, and polyaluminum chloride.

The coagulant causes small particles to join to form larger particles. During mixing, more particles combine to form even larger particles called floc. The floc is visible to the naked eye and can be removed from the water through sedimentation or direct filtration.

Coagulation can be done in dugouts, coagulation cells or by using in-house coagulation systems. The two most common methods of coagulation for rural use are:

- constructing a small lined dugout or coagulation cell to treat a six to twelve month supply of household water, or
- utilizing a commercial in-house coagulation system for continuous treatment of household water.



Coagulant chemicals must be dosed and mixed properly to achieve maximum benefits. On-farm coagulation has been experimentally successful, using simple treatment techniques for rural water supplies. Simple predictive tests have been developed for use on-site to determine the required dose rate.

For more information about coagulation, contact your nearest PFRA district office.

Conventional Filtration

Conventional filtration is also known as rapid filtration, to distinguish it from slow sand or biological filtration. Figure 37 shows continuous coagulation treatment followed by conventional filtration. Filtration is an important step in the treatment sequence to remove particles from water. Types of filter media that can be used include sand, dual media, multi-media, and granular activated carbon. Pressure sand filters and granular activated carbon filters are commonly used in domestic systems. Granular activated carbon filters can be used as a final step to remove taste and odour. In all cases, filters require backwashing to maintain performance. Backwashing is accomplished by reversing the flow of the water and lifting the media bed. Solids clogging the filter are dislodged and flushed out with the backwash water, which is discarded.

Biological Filtration

As an alternative to conventional filtration, biological filtration can be a simple but effective treatment for small water supplies. Slow sand filtration, followed by disinfection, represents one of the earliest systems developed for the treatment of surface water supplies. While these filters are commonly employed in many European treatment systems, they are not heavily used in North America.

Biological filtration makes use of naturally occurring microorganisms to purify water. By providing the right environment, certain populations of microorganisms can be encouraged to grow in the filter. The process is simple. Water is percolated slowly through a filter bed and into a storage tank. A storage tank is required for the treated water because filtration is slow. A constant supply of air must be introduced to the filter and the flow of water must be continuous to ensure survival of the microbial colonies. As with the rapid sand filter, backwashing is required to maintain the operation of the filter. Some biological systems are ideally suited to treat surface water problems, such as dissolved organic carbon, turbidity, colour, taste, and odour. One system that has been successful in the treatment of surface water consists of a gravity-fed, slow sand filter, followed by a biological, granular, activated carbon filter and a storage tank.

This system offers an effective alternative to more conventional treatment systems and produces high quality, household water. With further treatment, water from these systems can be made safe for drinking. Although no chemicals or bacteria have to be added to these systems, regular backwashing with a mixture of air and water in a 'reverse' up-flow through each filter is a necessary maintenance procedure.

Figure 37 Coagulation and Conventional Filtration System


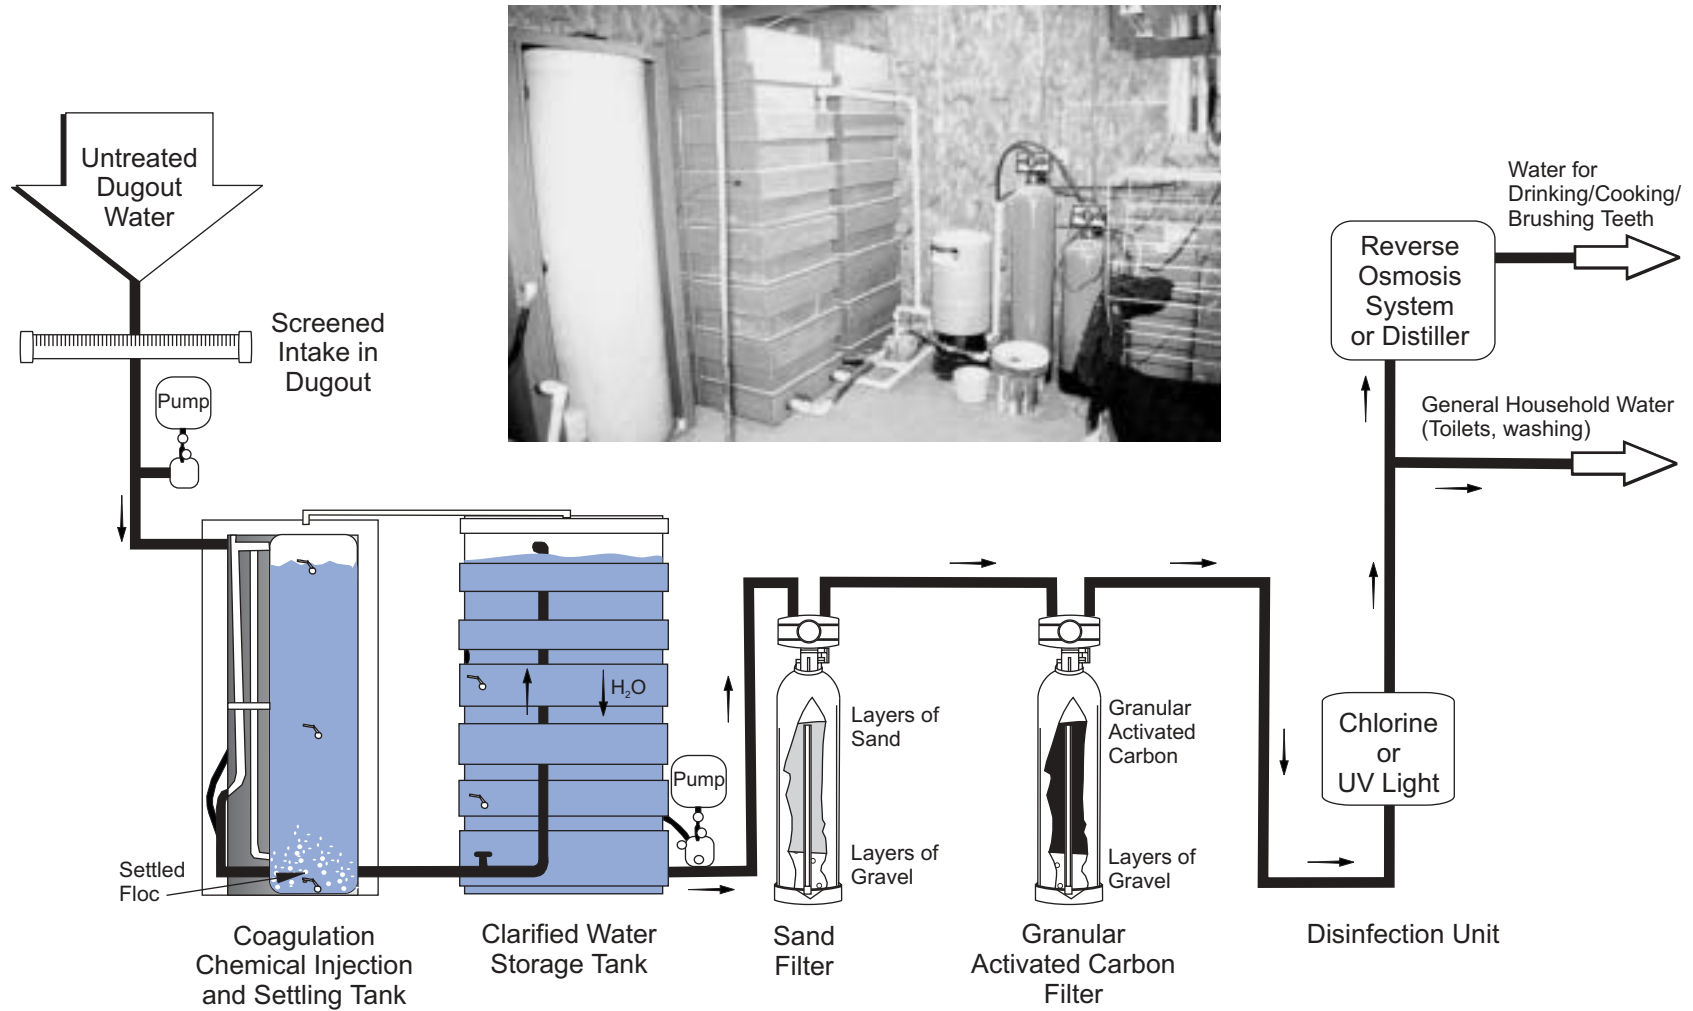


Figure 38 Biological Filtration System



Disinfection

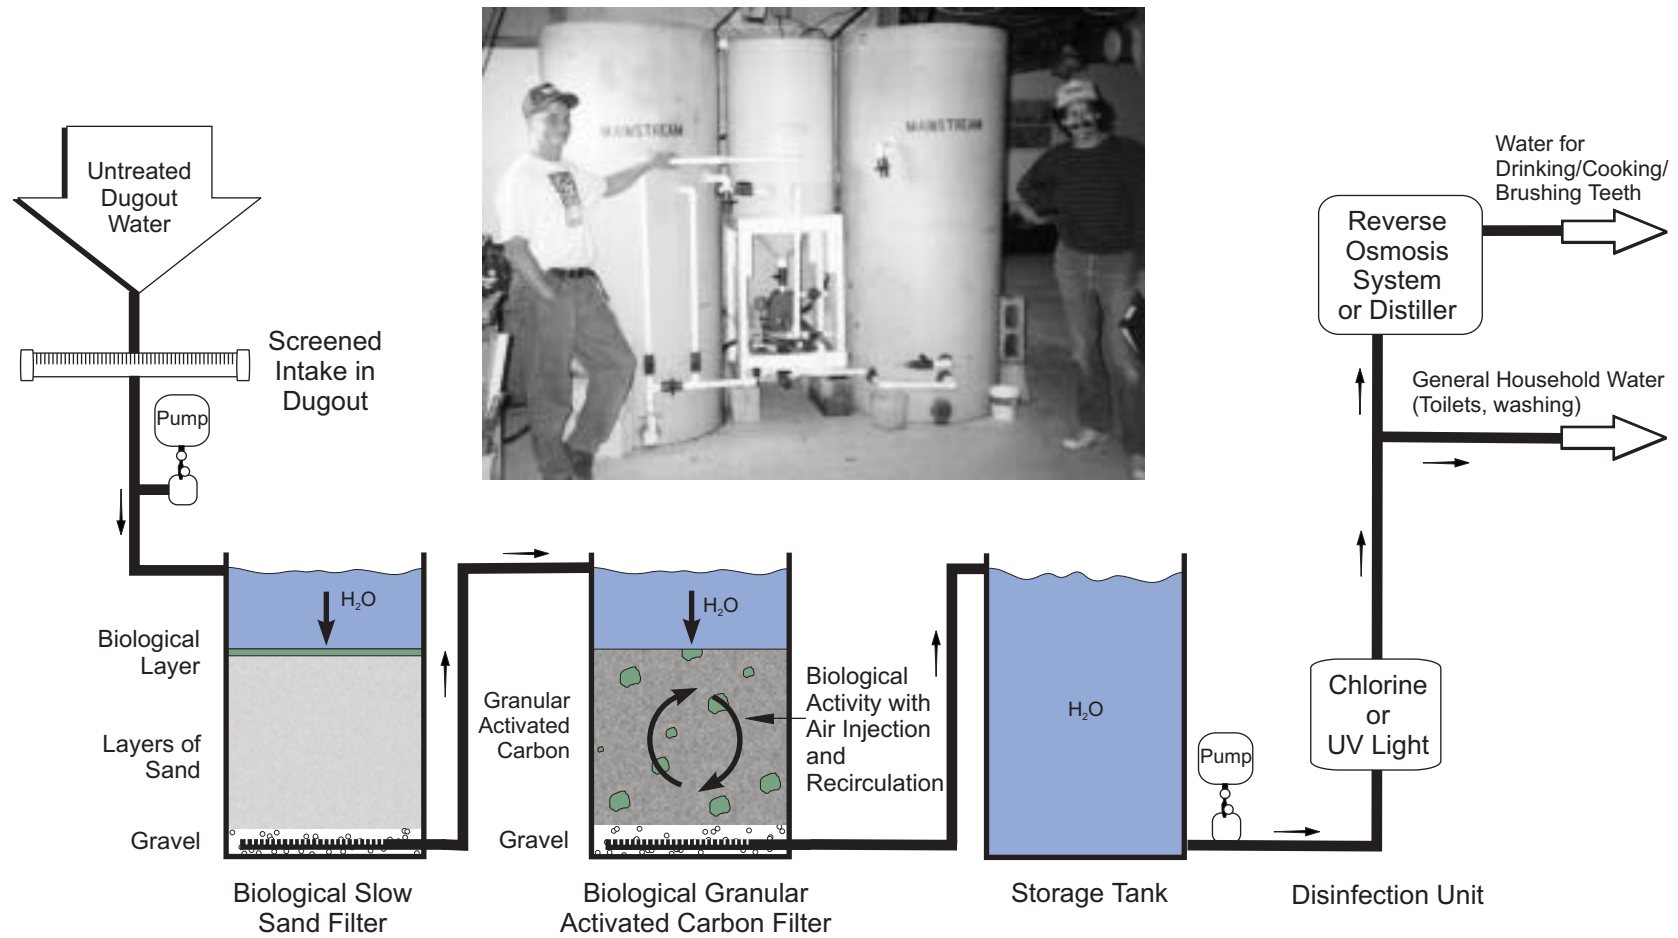

Disinfection is an essential step in the treatment of dugout water for domestic use. The purpose of disinfection is to reduce populations of pathogenic microorganisms to prevent the transmission of water borne diseases. This is different from sterilization, which completely destroys organisms. Common disinfectants include chlorine, chloramines, and ultraviolet light disinfection (UV). It is important that the water has been successfully filtered prior to the disinfection step.

Organic material and mineral particles can shield microorganisms from the disinfectant, resulting in water that may be unsafe even after treatment. In addition, if chlorine is used as the disinfectant and organic matter has not been reduced to low levels, potentially harmful chlorination by-products may form.

Contact time, pH, water temperature, organic concentration, and chlorine dose influence the effectiveness of chlorine disinfection.

Many rural residents prefer UV, as it imparts no smell, taste, or odour to the water. UV disinfection does not require chemical feed pumps and mixing tanks; however, it does not leave a disinfectant residual like chlorine, for protection throughout the household distribution system. Wavelength, exposure time, water temperature, intensity of the light, and the presence of turbidity affect the effectiveness of UV.

Polishing Treatment for Drinking Water



While it is recommended that the entire household water supply be disinfected to protect all water outlets in the home, a final barrier to supply safe drinking and cooking water is also recommended. This additional polishing step requires a distiller, or kitchen sink reverse osmosis unit. For additional detail on distillers and RO systems, see the related sections later in this module.

Maintenance of Treatment Systems

Operation and maintenance of in-house treatment systems is critical. If dugout owners are not prepared to invest the time and money required into treatment system maintenance, safe drinking water should be obtained elsewhere. Some treatment systems can be purchased with maintenance contracts to reduce the time and work associated with proper maintenance. A well-operated system will ensure that the water supply is safe and aesthetically pleasing. Regular monitoring of systems will give users confidence that the water they are using is safe. Maintenance should be tracked in a record book. If changes in quality are observed, corrective measures should be taken.



Conventional Pressure Sand or Multi-Media Filters

Pressure sand filters require regular backwashing. The backwash cycle can be set to start automatically. Backwashing frequency will depend on how much loading is placed on the filter by the feed water. In summer, when particulate loading is high, backwashing may be required as frequently as once a day. In winter, backwashing may only be required once every three to seven days. If water is pre-treated with continuous coagulation before the filter, the requirements for backwashing may be increased as unsettled floc from the coagulation process may clog the filter.

Organic matter will accumulate and plug pressure sand filters over time. For this reason, a manual backwash should be done at least twice annually, once in spring after snowmelt and once in fall, just before freeze-up. A manual backwash involves turning on the filter in backwash mode, unplugging the timer, and running a large quantity of water through the filter. Clean filtered water is preferred for backwashing. However, if raw water is used in this process, the wastewater should look as clear as the raw water. The backwash water should be inspected every 5 minutes for clarity. The manual backwash should be repeated until the backwash water is clean. If a filter is very dirty, backwashing may have to be repeated. If organic slime build-up is a problem, the filter can also be shock-chlorinated after the manual backwash. Filter media rarely require replacement unless the coarse filter gravel is displaced during overly aggressive backwashing.




Biological Sand Filters

Biological gravity sand filters may be designed for two types of maintenance regimes. The first regime involves backwashing the filter once every two to four weeks. The second involves replacement of the top layer of sand with new sand. Each spring and fall, the sand filter may require several cycles of backwashing to remove any accumulated material.



Figure 39 Filter Backwashing

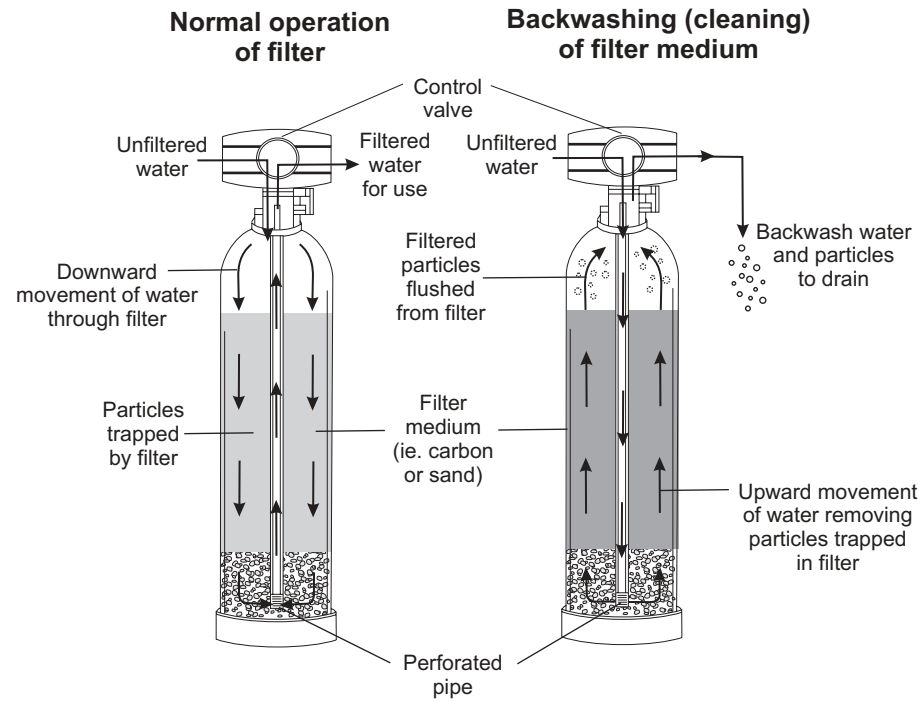

Conventional Pressure Carbon Filters

Pressure carbon filters also require regular backwashing. If a sand filter is operating efficiently, the pressure carbon filter will require backwashing once every 3 to 14 days. It is always important to follow manufacturer's recommendations and adjust the frequency of backwashing to the type of water being treated. Manually backwashing for a longer time than the automated backwash may be useful if particulate matter has overloaded the filter. This should be done any time overloading is suspected.



A significant problem associated with carbon filters is carbon exhaustion. This occurs when the carbon simply cannot adsorb any more taste and odour compounds or dissolved matter. Carbon exhaustion is identifiable by treated water that is coloured or has a bad odour. The adsorption capacity of activated carbon in a pressure carbon filter will not last forever. For dugout water supplies, carbon media should be replaced at least twice a year, once in fall and once in spring. Fall replacement, when organic matter has died off, provides better carbon filtration throughout the winter months. Spring carbon replacement, after spring runoff, provides for more effective filtration of water high in organic matter.

Granular activated carbon in the filters is only effective for 2 to 3 months. Carbon can be an excellent surface for unwanted microorganisms to grow on. Backwashing may not remove them and pre-treatment with chlorine will not prevent them from growing. Carbon must be replaced regularly to guarantee high quality water.



Biological Granular Activated Carbon Filters

Biological, granular activated carbon filters should be backwashed every 6 months. After the backwash, the filter should be drained of treated water until the water runs clear. Some fine carbon particles will wash through the system and should be discarded. Periodic shock chlorination is not required on biological carbon filters. If carbon media degrade, they require replacement. Long-term experiments on biological carbon filters have shown that the filters have performed well for seven years without any need for carbon replacement. The keys to successful biological carbon filtration are:



- ensuring that the system is sized properly,
- providing a continuous air supply, and
- backwashing frequently.

Raw water should not be chlorinated before passing through the filter. Nor should it contain any compounds, such as copper, that may poison the organisms.

Chlorination Disinfection



Chlorine solutions must be batched to a mixing tank. The chlorine feed pump is then set to feed the chlorine solution into the filtered water. To ensure the water is safely disinfected, chlorine must be applied **after** filtration. Contact time must be 10 to 20 minutes and the dose must be large enough to ensure that the residual at the tap is at a suitable level.



The only way to know the concentration of chlorine at the tap is to test it. Test kits are cheap and easy to use. Testing must be done at least once a week and doses adjusted if necessary. A loss of chlorine residual at the tap may be due to the loss of prime at the chemical feed pump, or the failure of the treatment system. This type of monitoring is an excellent way to track the system's performance. Keep a logbook and record the results. Take any necessary corrective action if a problem is noticed. Properly managed and monitored, chlorination systems are the most effective way of ensuring that filtered water is safe for domestic use.

Ultraviolet Light Disinfection



Ultraviolet disinfection lamps occasionally become impaired by poor quality water. If the lamp becomes coated with organic material or mineral scale, disinfection will be incomplete. Lamp maintenance under these conditions is not practical, and it is therefore critical that UV is **not** used to treat hard water.


UV lamps must be routinely replaced.

UV bulbs must be routinely replaced in accordance with manufacturer's instructions or when so indicated by warning lights. There is no way of knowing if the lamp is disinfecting properly, other than to test the water at a laboratory for microbial contamination. There are concerns that UV performance can be critically impaired by electrical supply variations. A dedicated power supply to the lamp is recommended. Do not install lamps on circuits that have other high load demands. It is extremely important that the bulb be functioning properly and that units be equipped with indicator lights to serve as a reminder for bulb replacement.

Distillers

Distillers require regular cleaning using compounds recommended by the manufacturer. Cleaning frequency will depend on the type of water being treated. Distillers remove chlorine, so when testing for chlorine residual, draw the sample ahead of the distiller.

Figure 40 Water Distiller

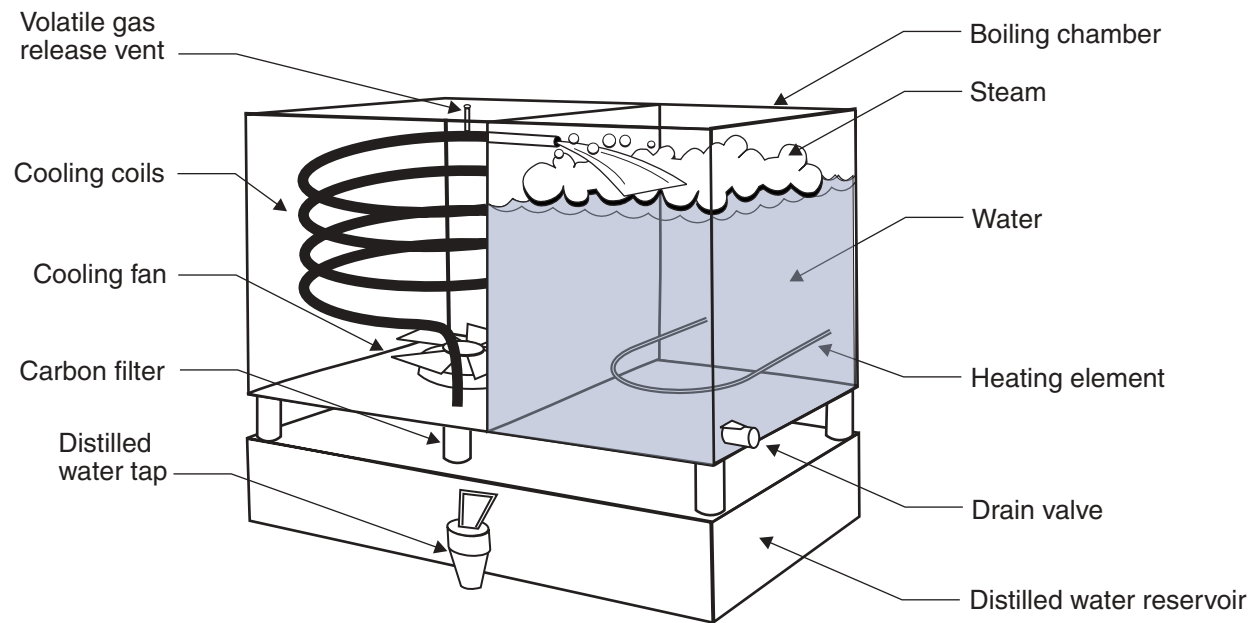

Reverse Osmosis Units

There are many types of reverse osmosis (RO) membrane units available. All are designed for use on very high quality feed water. It is common to incorporate a 5-micron filter, followed by a granular activated carbon filter, before the membrane. A compressed carbon block filter cannot be used in place of granular activated carbon filter. Both the 5-micron and the granular carbon filters require replacement at least four times per year. If the canister housings of the filters are slimy, they can be shock chlorinated and scrubbed as a part of the maintenance regime.

RO membranes reject most of the dissolved solids in water. If a total dissolved solids (**TDS**) test shows more than 50 TDS, the membrane is not working satisfactorily. Some units have indicators to warn of this condition. The RO membrane requires replacement once every 1 to 3 years. Sealing rings and end caps are critical features of the membranes. If they are damaged or incorrectly installed, water will by-pass the membrane and remain untreated. Corrective action is required immediately. If an RO unit stops producing water, the filters, or the membrane are likely plugged. Replacement is required.




Figure 41 RO Treatment Process


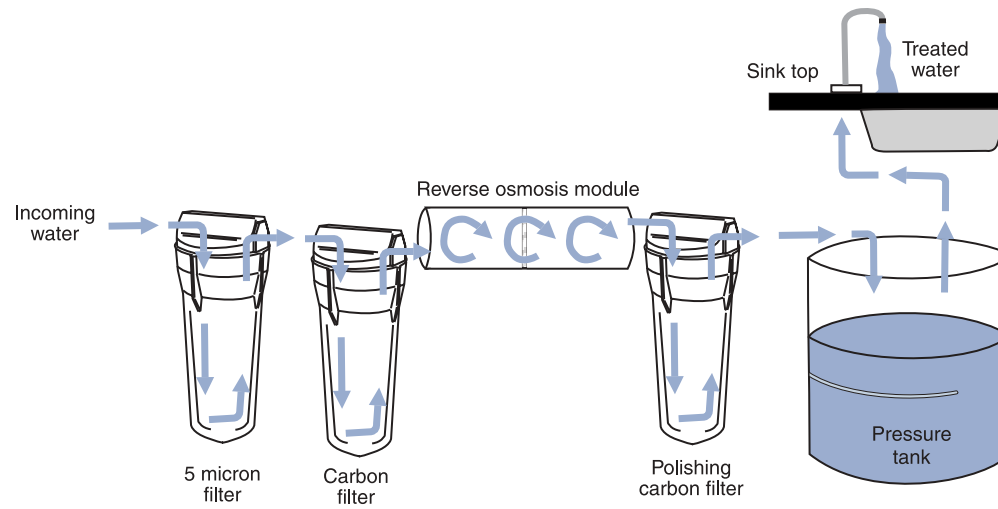


Figure 42 RO Membrane

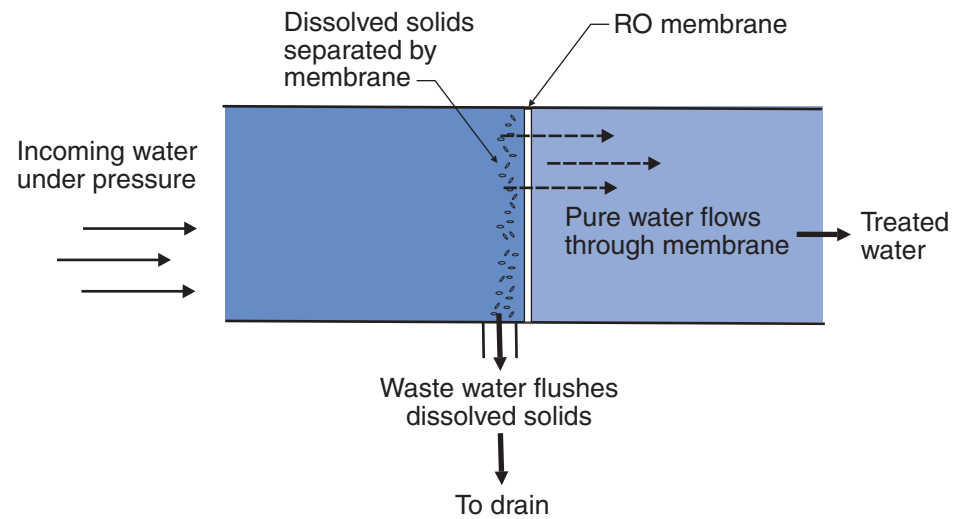

Do not to shock chlorinate RO membranes since they only tolerate low levels of chlorine. RO membranes remove chlorine, so when testing for chlorine residual, draw the sample ahead of the RO.

A granular carbon, polishing filter is often incorporated after the RO. This filter should be replaced at least four times per year. Granular carbon, polishing filters do not have to be discarded when replaced. They can be re-used once as the carbon filter in front of the RO.

Always follow manufacturer's recommendations for correct operation and maintenance procedures. The procedures must be suited to the specific treatment device.

Monitoring

Regular monitoring is the only way to determine how well a treatment system is performing. Keep a record of chlorine residuals, backwashing frequency adjustments, source water appearance, clarity, smell, and taste. Monitoring costs very little and increases confidence that the system is working well.

To judge the performance of a treatment system, tap water should be tested for microbial safety at least twice per year. Critical times for water testing are:

- following spring runoff,
- following any major runoff event,
- mid-summer, and
- during maximum ice thickness.

Water should be collected in sterile bottles following the instructions of the lab performing the tests. Samples must be properly labeled and packaged, and delivered to the lab within 24 hours. Keep all results in a binder.

The following two Operation and Maintenance Schedule examples, Figures 43 and 44, show both the conventional treatment system, and biological treatment system. Carefully review the examples to see the type of information recorded. Blank schedules for your use are located in the pocket at the back of the manual.



Equipment Certification

In Canada, water treatment equipment for private systems is not required to meet any standards or regulations. Furthermore, there is no Canadian certification mechanism for the effectiveness of water quality treatment.

Figure 43 Conventional Water Treatment System Schedule

Operation and Maintenance Schedule



Conventional Water Treatment System Operation & Maintenance Log					
<i>N.B. Chlorine always tested at kitchen sink top</i>					
Date	Coagulation	Sand Filter	Carbon Filter	Chlorinator	Distiller
Feb 28	Little floc visible	Backwashing once/7 days	Backwashing once/7 days	Tot. Cl = 0.5 mg/L	Cleaned unit
March	Not tested; on holidays				
April 2	Adjusted dose for spring water	Manual backwash for 30 minutes & shock chlorinated filter; backwashing once/4 days	Replace carbon media; backwashing once/6 days	Tot. Cl = 0.0 mg/L increased to 0.5 mg/L	Cleaned unit; replaced element
April 9	Settled floc OK	Backwashing once/4 days	Backwashing once/6 days	Tot. Cl = 0.2 mg/L; new batch and re-set to 0.5 mg/L	Working OK
April 16	Floc seems to be thickening	Changed to once/3 days	Changed backwashing to once/5 days	Tot. Cl = 0.1 mg/L Re-set to 0.5 mg/L	Cleaned unit
April 23	More floc evident	Changed to once/2 days	Changed backwashing to once/4 days	Tot. Cl = 0.3 mg/L Re-set to 0.5 mg/L	Cleaned unit
April 30	Floc is similar to last week	Backwashing once/2 days	Backwashing once/4 days	Tot. Cl = 0.6 mg/L Re-set to 0.5 mg/L	Cleaned unit
May 7	Floc turning brownish	Backwashing once/2 days	Backwashing once/4 days	Tot. Cl = 1.0 mg/L Re-set to 0.5 mg/L	Working okay
May 14	Floc brownish, same density	Backwashing once/2 days	Backwashing once/4 days	Tot. Cl = 0.1 mg/L Re-set to 0.5 mg/L	Cleaned unit
May 21	Thick floc (algae and sediment from rain)	Re-set backwashing to once/day	Backwashing once/4 days	Tot. Cl = 0.3 mg/L Re-set to 0.5 mg/L	Cleaned unit
May 28	Floc is still thick	Backwash once/day	Changed backwashing to once/3 days	Tot. Cl = 0.2 mg/L Re-set to 0.5 mg/L	Cleaned unit
June 7	Floc is thinner	Re-set backwashing to once/2 days	Re-set backwashing to once/4 days	Tot. Cl = 0.7 mg/L Re-set to 0.5 mg/L	Cleaned unit

Figure 44 Biological Water Treatment System Schedule

Operation and Maintenance Schedule

Date	Slow Sand Filter	Biological Carbon Filter	Storage Tank	Ultraviolet Light	Reverse Osmosis
Feb 28	Air pump working	Air pump working	Air pump working	UV lamp is on	TDS is 350 mg/L (RO needs replacement)
March	On holidays; neighbours opened taps to flow 500 L of water weekly; air pumps OK			Removed lamp; stained!	
April 2	Two manual backwashes with air & water & shock chlorinated filter	Three manual backwashes with air & water, filtered water was dirty, drained until clean	Shock chlorinated the tank	Replace UV bulb and quartz sleeve	Replaced membrane and all filters (5 micron, both carbon filters); TDS is 50 mg/L
April 9	Air stone replaced; old air stone was plugged	Air stone was replaced	Air pump and air stone is OK	Farm power surge. UV on/off test performed to check UV, OK	TDS measured 45 mg/L
April 16	Air pump working	Air pump working	Air pump working	UV lamp OK	TDS measured 45 mg/L
April 23	Air pump OK	Air pump OK	Air pump OK	UV quartz sleeve cleaned	TDS measured 53 mg/L
April 30	Manual air & water backwash	Air pump OK	Air pump OK	Replaced UV ballast (damaged by power surge)	TDS measured 55 mg/L
May 7	Air pump OK	Air pump OK	Air pump OK	UV lamp OK	TDS measured 150 mg/L ?? calibrated meter, TDS 65 mg/L
May 14	Dirty water but filter working OK	Filter okay, air supply OK	Water still OK and air system working	UV lamp OK	TDS measured 57 mg/L
May 21	Filter starting to plug, so performed mini-backwash	Flow rate slowing down	Air system OK	UV on/off self-test performed	TDS measured 70 mg/L
May 28	Manual air & water backwash	Filter flow OK after sand backwashed	Air system OK	UV lamp indicator OK	TDS measured 60 mg/L
June 7	Air pump working	Air pump working, stone OK, circulation seems fine.	Air system OK	UV quartz sleeve dirty; cleaned sleeve	Replaced plugged 5 micron filter TDS measured 55 mg/L

Although private treatment systems are not regulated in the United States, the National Sanitation Foundation International (NSF International) does certify small treatment devices if the manufacturer is willing to apply and pay for the third party evaluation. Try to find equipment that meets certification by NSF International to ensure that equipment performance has been validated against accepted standards. Be aware, however, that the test was probably not performed using water as challenging to treat as dugout water



Devices may also be registered with the United States Environmental Protection Agency (EPA). This registration means the equipment has been tested to ensure the device will not give off contaminants that may harm the consumer. The EPA does not test equipment performance.

Most importantly, work with a dependable water treatment company.


In 1999, Health Canada conducted the “Survey of Drinking Water Treatment Services Available on the Canadian Retail Market”. The survey covered seventeen cities across Canada including seven cities on the Prairies. The treatment devices studied included softeners, distillers, reverse osmosis systems, filtration systems, microbial purifiers, and UV systems. About half the devices surveyed were filtration systems, and about one quarter were reverse osmosis systems. The devices were divided into three groups:

- Treatment devices for disinfecting water contaminated by microorganisms.
- Treatment devices for improving taste, odour, and appearance.
- Treatment devices for removing chemical contaminants.

Health Canada Survey of Treatment Devices	
Models surveyed	318
Certified	34.0%
Uncertified	62.0%
Not NSF, but bearing name/logo	4.0%

The survey indicates that only one-third of the devices sold by retail have been tested and certified by professional testing agencies such as NSF, CSA, or UL. This leaves many questions unanswered as to the effectiveness and reliability of such devices in the treatment of dugout water.

Dugout Management

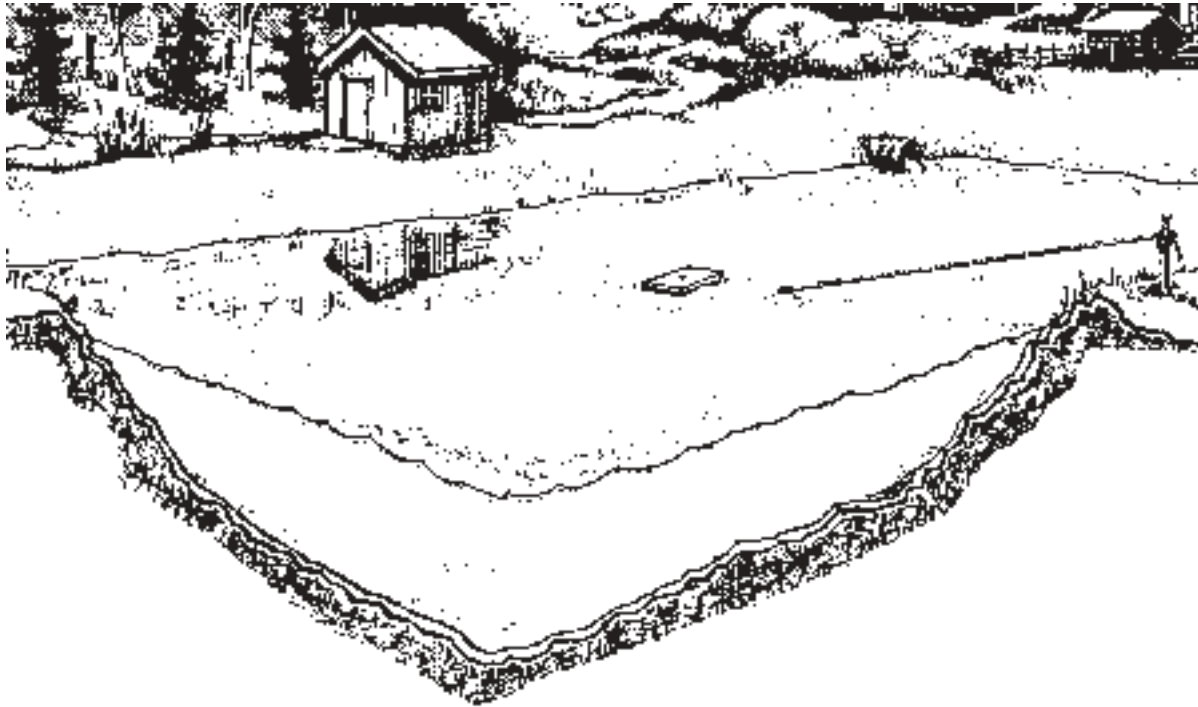

The goal of dugout management is to protect and improve water quality. Some of the strategies for doing this through dugout location and design have been discussed in the Planning Module. This chapter provides suggestions for preserving and enhancing water quality in existing dugouts. The cost and effort to properly manage a dugout is generally small and most often rapidly recovered in the form of improvements in water quality. Improving water quality reduces treatment costs, improves productivity of livestock, and generally improves the quality of rural life.



At a minimum, dugouts need to be inspected weekly during April to September and monthly from October to March. Early detection of problems allows corrective action before water quality deteriorates significantly. When inspecting, look for:

- Any peculiar signs of animal entry
- Signs of failure of the aeration systems
- Incorrect positioning of the water intake
- Algae growth or blooms, and increased plant growth
- Damage to grass buffer areas and diking
- Signs of contaminated runoff.

Keep a record of your inspections. This will enable you to document and analyze both short-term and long-term occurrences. The following example, Figure 42, shows a filled out Dugout Maintenance Schedule. Review the example to see the type of information recorded. Use the blank form located in the pocket at the rear of the manual to record dugout inspections.

Figure 45 Dugout Maintenance Schedule

Dugout Maintenance Schedule

Year: 2000 - 2001

Dugout No.: 1

Legal Land Description: NW 30-50-30-W4

Season	Date	Water Level	Comments (runoff, water quality, treatment, and maintenance)
Spring	March 25	4 ft from full	- very little runoff only added 2 ft of water - increase in sediment in water - checked aeration pump
Summer	June 15	5 ft from full	- water clarity decreased because of cyanobacteria growth - treated dugout with 3 pounds of copper sulphate to control cyanoabacteria
	July 17	6 ft from full	- spot treated water weeds around dugout edge with 1/2 liter of Reward (diquat)
	Aug 12	7 ft from full	- water clarity decreased - re-treated for cyanobacteria with 3 pounds of copper sulphate
Fall	Oct 5	7.5 ft from full	- approximately a 10 foot depth of water left in dugout which will be adequate for winter use - pulled floating intake to bank and cleaned perforations - thoroughly checked dugout aeration pump diaphragm, and checked valves in preparation for winter - ensured runoff control gate opens and closes in preparation for next spring's runoff
Winter	Jan 15	10 ft from full	- about a 5 foot depth of water below ice - checked aeration pump
	Mar 1	11.5 ft from full	- open runoff control gate prior to spring runoff

Summary of comments for the year and proposed improvements/change

- Water levels were very low because of the lack of spring runoff and high evaporation losses.
- Try to increase runoff into dugout with additional snow fencing and make plans for new shelterbelt.
- Need to clean air diffuser as it seems to be restricting air flow into the dugout.

Dugout Management Practices

There are a great number of dugout management practices. Many are known to be highly effective, others are still in the experimental stages. Some techniques are common sense and do not require special or highly processed products or services. Other treatments involve chemicals and make use of commercial products. This module outlines some of these practices, including their strengths and weaknesses.

Established Practices

The practices presented in this module are well-established methods of greatly improving dugout water quality.

Continuous Aeration



Continuous injection of supplementary oxygen is the single most effective practice for maintaining and improving water quality. Aeration is discussed further in the Operating Systems Module, Dugout Aeration Systems section.

Sediment Removal



Excavation of accumulated sediment from a dugout, every five to ten years, is an effective technique for improving water quality and extending the life of a dugout. Unfortunately, it is costly and excavation may exceed the cost of new dugout construction. Make careful cost estimates prior to deciding to clean out a dugout. Where two or more dugouts exist, divert all runoff away from the dugout to be excavated. Let the dugout dry up during summer, and excavate the sediment in early fall. Where only one dugout exists, the only way to excavate sediment under water is with a dragline or hydraulic backhoe. After excavation under water, expect the water to have high turbidity for up to several weeks or perhaps months.

Vegetation Control



Routine maintenance of the area around a dugout is important for maintaining water quality. Grassed buffers and runways surrounding dugouts should be mowed regularly. This prevents long grass from lying down and becoming ineffective as a sediment trap. Proper setback of shelterbelts ensures that the amount of fallen leaves entering the water is at a minimum. Steep

end-slopes reduce the amount of emergent plants than can grow in the dugout. If possible, aquatic plants should be removed from the dugout before they die and decompose. Shrubs and trees will take root on the banks of the dugout. Left alone, they can grow quite large and contribute significant amounts of vegetation to the water in fall. Annual cutting and removing of willows and volunteer saplings every fall can make a significant contribution to protecting dugout water.

Removal of animals

Animals such as salamanders, also called mud puppies, and muskrats can create problems in a dugout by burrowing, house building, and foraging for plant roots. This disturbs the sediments and keeps the water constantly turbid. The most effective way to remove muskrats is trapping or hunting. Specially designed fencing can be used to keep them out in the first place.



Copper Sulphate

Copper sulphate, also known as **bluestone**, is perhaps the most common chemical used to treat dugouts. It is also the least understood. Copper is an essential element for both plants and animals, but at high concentrations, it can be toxic. Copper treatments can be very effective at controlling cyanobacteria. However, copper sulphate treatments are most effective when done in early summer before large populations develop.

Copper may also kill beneficial organisms, like zooplankton, which feed on some algae species. Overuse and repeated treatments can also cause a build-up of copper in the sediments of a dugout. This can harm or kill beneficial organisms and disrupt the normal biology of the dugout. In fact, a single overdose can also cause a man-made green algae bloom.

Health Canada recommends that the concentration of copper in drinking water for humans not exceed 1 mg/L copper. However, this is far below what would be a toxic level.

Copper treatments should therefore be done very selectively. It is not reasonable to expect dugouts to be completely free of green or brown algae, nor free of aquatic plants. The primary target organism of a copper treatment is cyanobacteria. If copper is applied during an algae bloom, there may be an immediate release of large quantities of toxin. Because of the toxins they produce, it is recommended that you wait a minimum of 14 days before the water is used for human or animal consumption. This should allow toxin levels to dissipate. Continuous diffused aeration during this period may also help degrade toxins.



Don't overdose! Copper is not effective on green algae!



Figure 46 Bluestone Treatment



Copper is found in a variety of products. The active ingredient is always the copper element (Cu) itself. As of December 2000, copper products registered by the Canada Pest Management Regulatory Agency, for control of algae in dugouts include:

- Algi-Boss Algicide Solution
- Nalco Cuprous Algae Control Chemical
- Cominco Cupric Sulphate Pentahydrate
- Polydex Bacteriostatic Algicide
- Cutrine Plus Liquid Algicide
- Cutrine Plus Granular Algicide
- Phelps Dodge Triangle Brand granular

More information about copper products and procedures for treating dugouts is provided in Appendix 3 Using Copper.

Figure 47 Coagulation Cell

Coagulation

The coagulation process is outlined in the Water Treatment Module. Opposed to treating the entire dugout, it is more economical to treat the small volume of water required for high quality use in a specially constructed treatment cell, separate from the dugout. However, coagulation chemicals have successfully treated entire dugouts and have remediated flood affected turbid dugouts. The addition of Powdered Activated Carbon has proven to be helpful for increased removal of dissolved organic matter, taste, and odour compounds. If a dugout is coagulated regularly, chemical residues should be monitored.

Herbicides

Only two herbicides are registered for use by the Canada Pest Management Regulatory Agency to control aquatic weeds and algae: Reward A and Karmex DF. These compounds may only be used on privately owned reservoirs where water does not flow into other water bodies. Always follow label directions, and use safe handling practices to protect yourself from the product. In order to calculate the proper dosage, you must accurately estimate the existing volume of water in the dugout to be treated.



Figure 48 Herbicide Treatment



Reward

Reward is a non-selective herbicide with **diquat** as the active ingredient. Following treatment, the water should not be used for human or animal consumption for 2 weeks. This will allow for dissipation of the chemical as well as potential cyanobacteria toxins that may have been released by the treatment. A five-day wait is suggested if the water is to be used for irrigation. This is to protect irrigated plants from being damaged by residual herbicide concentrations. **Reward** is a new formulation of diquat that replaces Reglone A.

Karmex DF

Karmex DF is a non-selective, systemic herbicide with **diuron** as the active ingredient. It is licensed for use in Canada primarily for use in ornamental water bodies. It is not registered for dugouts used for domestic water supplies, or dugouts with fish, where the fish may be used for human or livestock consumption. Although not provided as a specific safety precaution by the manufacturer, treated water is probably not suitable for watering livestock. Water treated with Karmex DF should not be used as irrigation water for a minimum of 12 months. Nor should it be applied to dugouts or ponds with desirable trees or shrubs around the perimeter as roots may take up the herbicide from the water and cause injury to the plants.



Experimental Practices

A number of practices are being tried to manage dugout water quality. Research into their feasibility, and effectiveness is ongoing. Although this module outlines some of these practices, they cannot be recommended at this time.

Dugout Covers

Floating synthetic plastic dugout covers have been used experimentally on dugouts to prevent algae and plant growth by limiting light penetration into the water and to minimize evaporative losses. Plastic tarp-like covers are floated on top of the water and anchored to the banks at several points. Since the water level in the dugout will vary during the year, the anchor straps must be left slack or adjusted on a regular basis to allow for fluctuating water levels. Individuals who have used dugout covers have reported a significant reduction of evaporative losses in periods of drought.

Figure 49 Dugout Cover



Supplemental diffused aeration is essential to maintain oxygen levels in a covered dugout. Well-designed covers are perforated with special slits to release any accumulated air from the aeration system that collects underneath the tarp. Due to the nature of these slits, they allow the release of air while preventing the passage of light through the perforations. Dugout covers have a life expectancy of only 3 to 5 years due to degradation by ultraviolet light, but problems can arise sooner from wind and ice damage. If tarp anchors are not properly adjusted, wind damage can destroy a dugout cover.

Disinfectants

Disinfectants are chemicals containing concentrated oxidants, such as chlorine, hydrogen peroxide, and ozone. They are effective at killing micro-organisms:

- when the water is clean enough,
- the dosage is strong enough, and
- the contact time is long enough.

However, disinfectants are non-selective and will kill off many beneficial organisms. Accordingly, they are not registered for use in dugouts, although they are widely used in water treatment plants.

Plants

Plants have been used experimentally to improve water quality. Some species of aquatic plants may improve summer water quality by taking up nitrogen and phosphorus. With the fertility of the water reduced, the growth of unwanted algae species may be suppressed. Rooted plants such as cattails can serve this purpose. However, in order to maintain the water quality, the plants must be removed in the fall. If not removed, the plants will eventually die off, and plant nutrients will be returned to the water.

Because bottom-rooted plants can be difficult to harvest, there is interest in using floating plants to improve water quality. Duckweed is a floating, native plant that is able to take up large amounts of phosphorus from water but must be constantly harvested and removed from the dugout. It only survives in relatively sheltered locations and often blows to the downwind side of a water body. Water hyacinth is a floating, tropical plant that has only been used experimentally on Canadian dugouts to reduce algae problems. Both duckweed and water hyacinth can be harvested using a floating boom, as shown in the following figure.

Figure 50 Harvesting Duckweed

Harvesting can be accomplished by dragging a floating timber boom across the dugout to the opposite shore, and removing the plants.

Fish

Fish are sometimes added to dugouts to improve water quality by eating aquatic plants. However, they may often compound dugout, water quality problems by making it difficult to use other chemical methods of algae and plant control.

For the same reasons that plants should be removed from a dugout, fish should be harvested before they die and decompose. Grass carp or *Tilapia* are effective at removing plants in dugouts but because of concern about the possibility of escape into the wild, their use is not permitted in some provinces. Check with provincial authorities before considering the addition of fish to a dugout. Some fish, notably rainbow trout, can actually degrade water quality by eating phytoplankton, and adding excrement to the water.


Miscellaneous Biological and Chemical Products

There are a number of products now available on the market that advertise the ability to improve water quality. Many of these products have been developed for non-consumptive ponds such as golf courses, ornamental ponds, and zoo ponds. The range of products includes bacteria, chemical toxins, and light inhibiting dyes. Check for registration with the Canada Pest Management Regulatory Agency of Health Canada, and if registered, check the registration/certification information for any specified water use limitations.



The vast majority of these products are **not** registered by the Canada Pest Management Regulatory Agency for application to dugouts or farm ponds used for consumptive purposes. Until research proves the effectiveness and safety of these chemicals in dugouts, their use is not recommended.

Trouble Shooting Guide for Dugout Problems

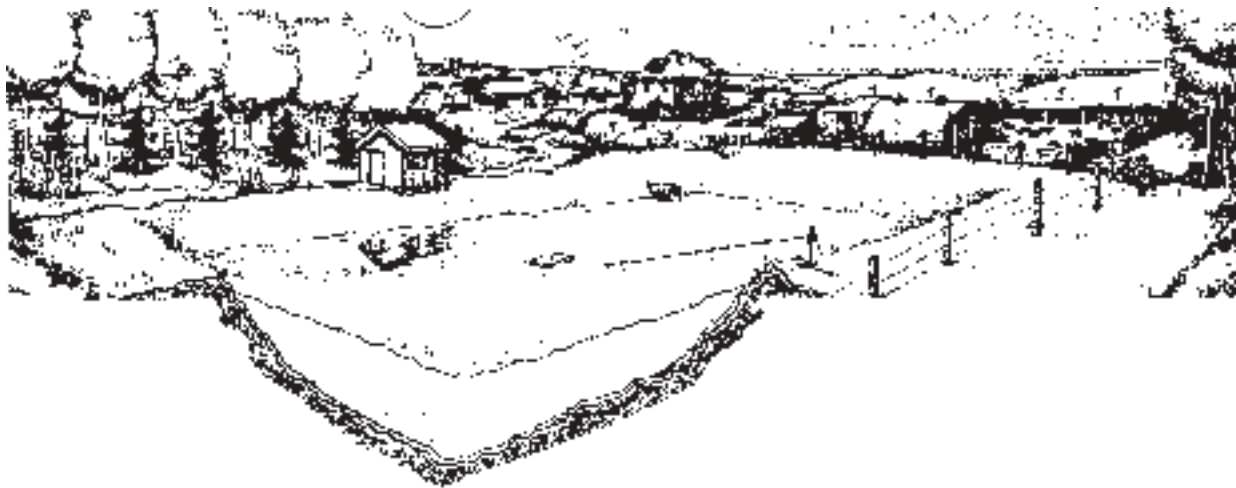

Dugout problems fall into two broad categories: water quantity and water quality. Problems can result from the watershed; the dugout location, design, and construction; the systems and equipment for pumping, aeration, and treatment; as well as management practices. This module is designed to identify the source of a problem and provide suggestions for correction. The troubleshooting guide starts by identifying typical symptoms of water quantity or quality problems. It systematically lists possible causes, identification features, suggestions for corrective action, and references for further information within the manual.

Symptom 1 Low Dugout Water Levels

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Inadequate watershed	<ul style="list-style-type: none"> observe or measure the area contributing water to the dugout during runoff events. 	<ul style="list-style-type: none"> enhance snow trapping in the watershed with shelterbelts, snow fences or crop stubble pump water to fill dugout develop another water source 	<ul style="list-style-type: none"> Watershed Runoff Potential and Dugout Sizing Appendix 4 Contacts and References Planning Farm Water Supplies
Drought	<ul style="list-style-type: none"> what are normal snow and rainfall amounts for your area? Information available from Environment Canada 	<ul style="list-style-type: none"> snow trapping pump water from another source increase water storage develop another water source (back up) for drought proofing purposes 	<ul style="list-style-type: none"> Watershed Runoff Potential and Dugout Sizing
Dugout too small	<ul style="list-style-type: none"> compare annual water use and ice and evaporation losses with dugout size recommended consider any future expansion, etc. steady drop in water levels 	<ul style="list-style-type: none"> increase dugout source and add another source 	<ul style="list-style-type: none"> Watershed Runoff Potential and Dugout Sizing
Seepage from dugout	<ul style="list-style-type: none"> sand lenses or layers of silts and fractured clay 	<ul style="list-style-type: none"> use dugout sealing techniques relocate dugout to suitable soil condition 	<ul style="list-style-type: none"> Large Scale Sealing Methods and Materials
Soil depositing in dugout	<ul style="list-style-type: none"> soil erosion in watershed or watercourses draining to dugout 	<ul style="list-style-type: none"> use soil erosion techniques such as a grass cover and gated culvert inlets to the dugout to prevent sedimentation remove sediment from dugout with a large trackhoe or dragline use a 2 dugout system: one for a settling pond and the second for use 	<ul style="list-style-type: none"> Water Quality and Watershed Management Dugout Design Sediment Removal Sedimentation Dugouts

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Upstream blockages or drainage	<ul style="list-style-type: none"> upstream beaver dams, snow damming or sediment blockages in water courses upstream drainage or diversion reducing runoff to dugout 	<ul style="list-style-type: none"> use a tractor to remove snow dams or drifts that re-direct water runoff contact appropriate agencies responsible for beaver control and/or watercourse changes contact provincial government agencies responsible for drainage approvals 	<ul style="list-style-type: none"> Appendix 4, Contacts and References Appendix 4, Contacts and Reference

Symptom 2 Human or Animal Sickness Caused by Water Contamination

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Water Contamination	<ul style="list-style-type: none"> identify potential sources of contamination in the runoff area and seek professional advice on specific test parameters. 	<ul style="list-style-type: none"> discontinue using the water source and consult local health unit, doctor or veterinarian for their assistance remove the source of contamination wherever possible and replace gravel trench filters with floating dugout intakes seek advice from water treatment specialists. provide another source of uncontaminated water or install appropriate water treatment equipment install filtration and disinfection equipment install polishing treatment equipment, such as R.O. or water distillers install cistern to haul in water for household use and drinking 	<ul style="list-style-type: none"> Health Risks and Water Quality Standard Testing of Drinking Water Health Risks and Water Quality Intake Systems Steps in Water Treatment Steps in Water Treatment Steps in Water Treatment Steps in Water Treatment

Symptom 3 Black Smelly Water in Dugout

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Depletion of dissolved oxygen levels in dugout water (summer)	<ul style="list-style-type: none"> • abundant algae and weed growth and decay • cyanobacteria growth • grass clipping appearance to water • dark green slime floating or deposited along dugout banks • dirty water after runoff and reduced water depths in dugout • organic plant material deposited in dugout • recycling of nutrients from dugout sediments causing increased algal growth • water intake near dugout bottom • deterioration of water quality in wet well 	<ul style="list-style-type: none"> • control algae and weed growth by employing control techniques • replenish oxygen with dugout aeration system • employ soil erosion techniques in watershed or watercourses, gated inlets or two dugout system • clean dugout with excavation equipment and steepen all slopes to reduce weed and algal growth • use screened culvert inlets and locate deciduous trees away from dugout • ensure dugout aeration is diffused at the dugout bottom • use a perforated pipe or device to diffuse oxygen instead of open ended hose • raise floating intake near surface • clean out large-diameter wet wells or abandon in favour of small-diameter wet wells 	<ul style="list-style-type: none"> • Dugout Management Practices • Dugout Aeration Systems • Sedimentation Dugouts • Water Quality and Watershed Management • Sediment Removal • Vegetation Control • Dugout Aeration Systems • Dugout Aeration Systems • Intake Systems • Wet Wells

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Depletion of dissolved oxygen levels in dugout water (winter)	<ul style="list-style-type: none"> dugout aeration equipment not installed or working properly snow cover on dugout reducing sunlight and oxygen produced by growing plants 	<ul style="list-style-type: none"> check and maintain dugout aeration equipment where feasible carefully clean snow-cover from a portion of dugout surface 	<ul style="list-style-type: none"> Dugout Aeration Systems
Black smelly water after Home Treatment System only	<ul style="list-style-type: none"> filter system fouled with organic material and organic sediments in pressure tank and/or hot water 	<ul style="list-style-type: none"> clean or replace filter medium ensure adequate disinfection of water 	<ul style="list-style-type: none"> Steps in Water Treatment
Bottom dugout water entering from damaged intake pipe	<ul style="list-style-type: none"> damaged intake pipe hire a diver to repair water intake pipe 	<ul style="list-style-type: none"> hire a diver to repair water intake pipe 	<ul style="list-style-type: none"> Steps in Water Treatment

Symptom 4 Dirty Dugout Water

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Soil erosion of watershed and watercourses	<ul style="list-style-type: none"> • soil erosion • recent runoff event • suspended clay particles that will not settle 	<ul style="list-style-type: none"> • employ soil erosion techniques and gated inlet • use a two dugout system • use coagulants in dugout to clear water 	<ul style="list-style-type: none"> • Dugout Design • Water Quality and Watershed Management • Sedimentation Dugout • Coagulation
Erosion in dugout	<ul style="list-style-type: none"> • soil erosion by wave action 	<ul style="list-style-type: none"> • protect eroded dugout banks with erosion prevention materials like filter cloth, plastic, or riprap • install water treatment system including coagulants and sand filter • Dugout Construction 	<ul style="list-style-type: none"> • Dugout Construction • Steps in Water Treatment
Muskrats, ducks, mud-puppies	<ul style="list-style-type: none"> • abundance of cattails and tunnels into dugout banks • floating cattails 	<ul style="list-style-type: none"> • control cattails and remove muskrats by trapping, etc. 	<ul style="list-style-type: none"> • Dugout Management Practices
Contaminated Runoff	<ul style="list-style-type: none"> • test water for bacteria, chemicals and pesticides 	<ul style="list-style-type: none"> • remove contaminants and/or cause from watershed • divert any contaminated runoff around dugout • install water treatment equipment 	<ul style="list-style-type: none"> • Dugout Water Quality • Steps in Water Treatment
Human Activity	<ul style="list-style-type: none"> • swimming 	<ul style="list-style-type: none"> • eliminate swimming 	

Symptom 5 Discoloured Water and Staining

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Iron in Water	<ul style="list-style-type: none"> • brown to rusty coloured stains on clothes and plumbing fixtures 	<ul style="list-style-type: none"> • install dugout aeration system and/or iron removal treatment equipment if required • replace gravel trench filters with floating water intakes 	<ul style="list-style-type: none"> • Dugout Aeration Systems • Steps in Water Treatment • Intake Systems
Organic Matter in Water	<ul style="list-style-type: none"> • sloughy conditions around dugout • staining • abundance of organic material and peat soil in watershed or dugout area • decomposing plants and animals • excessive plant and algal growth in dugout • green to yellow colour (dissolved or particulate organic colour) • shallow dugout with flat slopes • watershed/watercourse vegetation containing clover etc. • excessive dosages of chemicals including copper sulphate for algal control resulting in man-made blooms of green algae • test for dissolved organic carbon 	<ul style="list-style-type: none"> • prevent flooding and slough conditions • re-locate dugout • coagulation treatment • re-locate dugout • cover organic material around the dugout with clay soil and grass cover • install aeration equipment • use gated inlet to allow clear water into dugout • control nutrients coming into dugout which encourage plant and algal growth • control algae and plant growth with a combination of biological, physical and chemical methods • install aeration equipment • steepen dugout slopes and deepen dugout • avoid planting vegetation that imparts colour • reduce/eliminate chemical dosages and allow zooplankton to re-establish and control green algae • use coagulants in the dugout or in home treatment to remove 	<ul style="list-style-type: none"> • Dugout Aeration • Dugout Design • Water Quality and Watershed Management • Dugout Management • Dugout Construction • Water Quality and Watershed Management • Appendix 3 Using Copper Products... • Steps in Water Treatment

Symptom 6 Mineral Scale and Grey Discolouring of Clothes

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Calcium and magnesium hardness	<ul style="list-style-type: none"> • scale on plumbing fixtures, humidifier • grey colouring of clothes • test for hardness • gravel infiltration trench 	<ul style="list-style-type: none"> • install ion-exchange water softener • use water additives such as Calgon etc. • install a direct intake 	<ul style="list-style-type: none"> • Steps in Water Treatment • Intake Systems

Symptom 7 Taste and Odour in Water

Possible Causes	What to Check For	How to Correct (Options)	For More Information See Section On:
Iron in water	<ul style="list-style-type: none"> • refer to symptom 5 for comments 		
Sloughy, musty, fishy smell	<ul style="list-style-type: none"> • algal growth 	<ul style="list-style-type: none"> • use algal control techniques • install activated carbon filtration 	<ul style="list-style-type: none"> • Dugout Management • Steps in Water Treatment
Rotten egg smell	<ul style="list-style-type: none"> • refer to symptom 3 for comments 		
Salty, bitter taste	<ul style="list-style-type: none"> • high total dissolved solids caused by groundwater seepage or increased mineralization in gravel trench 	<ul style="list-style-type: none"> • prevent poor quality water from seeping into dugout or relocate dugout • replace gravel filter trench with floating water intake 	<ul style="list-style-type: none"> • Planning • Intake Systems

Glossary

absorption – a process by which one substance is trapped **throughout** the volume of another, usually a liquid by a solution.

adsorption – a process by which a substance is trapped **on** the surface of a solid substance.

algae – single-celled plants, capable of photosynthesis.

alkalinity – the ability of a solution to neutralize acids.

aquaculture – production of aquatic plants or animals, particularly fish, for commercial purposes.

aquifer – an underground layer of relatively porous, saturated soil or rock that is capable of yielding a useful supply of water.

backwashing – the cleaning cycle of a water treatment system where clean water is forced back through the filter media.

bacteria – single-celled organisms that do not contain chlorophyll and are not capable of photosynthesis.

bentonite – a swelling clay used to construct liners for lagoons and dugouts.

blue-green algae – common expression used to refer to cyanobacteria, an aquatic microorganism which can produce powerful toxins.

coagulation – the addition of certain chemicals to water that allow very small particles to collide, stick together, and form flocs.

coliform – a common group of bacteria used as a biological indicator of water pollution.

contour planting – planting crops in rows that are at right angles to the direction of the slope.

cryptosporidia – a single-celled, disease-causing, parasite whose life-cycle includes a cyst-forming phase which allows the organism to survive in harsh environments.

cyanobacteria – single-celled organisms that are capable of photosynthesis but are more closely related to bacteria than plants. They are often referred to as ‘blue-green algae’.

diffuser – a device for introducing small air bubbles into water.

disinfection – the process of eliminating nearly all disease-causing organisms from water.

duckweed – a floating green plant that obtains nutrients from the water using dangling roots. It often forms large floating mats.

E. coli – a species of fecal coliform bacteria, some strains of which cause disease in humans. The strain, *E. coli* 0157:H7, has been identified as the pathogen in the Walkerton water supply.

fecal coliform – coliform bacteria that live in the intestines of warm-blooded animals.

floc – a particle formed in coagulation-flocculation process which is large enough to settle out of water.

gpm – gallons per minute.

giardia – a single-celled, disease-causing parasite whose life-cycle includes a cyst-forming phase which allows it to survive in harsh environments. The disease is commonly referred to as ‘beaver fever’.

gleization – a dugout sealing technique which involves packing a layer of clay over a layer of organic matter. The term is derived from a natural soil-forming process.

integrated pest management – a system of agricultural pest management based on a wide variety of practices and control measures that are economically feasible and environmentally sound.

lift – when applied to water pumping, lift indicates the distance or elevation water is to be moved vertically.

mg/L – milligrams per liter.

mIlg – million Imperial gallons.

nutrient management – a system of fertilizer management that minimizes the amount of fertilizer applied on a farm.

ozonation – a process of water disinfection that uses ozone. Ozone is the next most powerful oxidant after fluorine.

pathogen – a microorganism that can cause disease.

pH – pH is a measure of the acidity of a solution. It is measured on a logarithmic scale from 1 to 14. Solutions of pH 7 are neutral, solutions below 7 are acidic and solutions above 7 are basic.

phosphorus – an essential plant nutrient but one that often causes algae blooms when an excess is present in a water-body.

pitless adapter – a mechanical device designed to provide frost-free, sanitary well conditions.

psi – pounds per square inch.

plant nutrients – mineral elements required by plants.

point-of-entry treatment – a system used to treat all or part of the water at the inlet to a facility.

point-of-use treatment – a plumbed-in or faucet-mounted system used to treat water at a single tap or multiple taps but not used to treat all the water for a facility.

pressure tank – a component of a water distribution system which holds water at higher than atmospheric pressure.

protozoa – single-celled microorganisms that consume bacteria and algae.

riprap – a wall or bank of stones used to provide strength and prevent erosion.

submersible pump – a centrifugal pump which is run by an electric motor and operates while submerged under water.

total dissolved solids (TDS) – the sum of the weights of all mineral compounds dissolved in a specific volume of water.

turbidity – a measure of the light-scattering effect of small particles suspended in water.

ultra-violet disinfection – a water purification process using ultraviolet (UV) light to kill microorganisms by disrupting their DNA and preventing reproduction. In order to be effective, UV must actually strike the cell.

virus – a large group submicroscopic organisms consisting only of a core of RNA or DNA which is surrounded by a protein coat. Many viruses cause disease in humans.

Watershed – the area of land that drains runoff to a point on a stream or other water body. Also called a drainage basin.

wet well – a structure installed next to a surface water supply, rather than directly in it, to provide a safe and convenient location for a distribution pump.

zooplankton – a diverse group of tiny aquatic animals that feed on algae and bacteria.

Appendix 1 Provincial Regulations

Alberta

Water Licensing

The *Water Act* establishes that the Crown, the Province of Alberta, has ownership of all water. In Alberta, no license is required for household purposes **up to** 275,000 imperial gallons (1250 cubic meters of water) per year. Under the *Water Act*, household purposes are defined as water used for human consumption, sanitation, fire prevention, and watering animals, gardens, lawns, and trees.

Using water from dugouts is exempt from licensing if:

- Water is naturally impounded in the dugout from surface water runoff and no pumping has been done to facilitate the impoundment.
- The dugout is not situated within a watercourse, lake or wetland at any time.
- The capacity of the dugout is less than 2,750,000 imperial gallons (12,500 cubic meters).
- The total withdrawal of water from the dugout is less than 1,375,000 imperial gallons (6250 cubic meters) per year.

For more information, contact Alberta Environment in Edmonton.

Fish Stocking

Recreational and/or commercial licenses are required to stock fish in a dugout. The licenses are issued by the Aquaculture Section of Alberta Agriculture, Food and Rural Development. For more information, contact their office in Lethbridge. Licenses may also be required by Alberta Environment if dugouts are not used for household purposes and do not qualify under the exemption noted above.

Setbacks

Alberta Transportation requires a minimum setback of 40 meters (131 feet) from the highway property line on all primary and secondary highways. Local counties and municipalities also have similar setback distances from their roads for safety purposes. For further information, and to determine if a development permit is required contact your local county or municipality office as well as the nearest Alberta Transportation office.

Technical and Financial Assistance

For technical assistance and information about possible funding opportunities, contact the nearest PFRA district office or Alberta Agriculture district office.

British Columbia

Water Licensing

Under the *Water Act*, water is owned by the province, and therefore, all water uses from a surface water source must be licensed. In the Peace River Region, however, the province has a license exemption for domestic and livestock watering dugouts, unless dugout construction involves changes in and about a stream as defined by the *Water Act*. All in-stream work requires a permit. If a dugout impounds water above ground level with a dyke or berm, it should be assessed using the dam safety regulations. For more information, contact the Ministry of Environment, Lands and Parks, Fort St. John.

Fish Stocking

A permit is required to stock fish in a dugout. The only species currently allowed for stocking in the Peace River Region is trout. Grass carp is prohibited. Permits are issued by the Federal/Provincial Fish Transplant Committee. For more information, contact the Ministry of Environment, Lands and Parks, Fort St. John.

Setbacks

The Ministry of Highways classifies a dugout as a structure; therefore a dugout must be a minimum of 25 feet (7.6 meters) from the edge of the road allowance, or 150 feet (45.6 meters) from the center of the road. For more information, contact the Department of Highways, Dawson Creek.

The Peace River Regional District should also be contacted regarding potential setbacks between or adjacent to property lines. These setbacks are site specific and have no set parameters. For more information, contact the Peace River Regional District.

Technical and Financial Assistance

For technical assistance and information about possible funding opportunities, contact the nearest PFRA district office or British Columbia Ministry of Agriculture and Food, Fort St. John.

Manitoba

Water Licensing

Ownership of surface and groundwater is vested in the province of Manitoba. The size, location, and intended use determine the licensing requirements for water storage and use in Manitoba. Domestic use does not require approval. Domestic use is defined as rural household and livestock consumption up to 5500 imperial gallons (25,000 liters) per day. For more information, contact Water Rights Licensing Section, Manitoba Conservation, Winnipeg.

Fish Stocking

Aquaculture operations involving fish hatcheries require licensing and provincial environmental assessment. Dugouts used for commercial fishery operations also require a Fish Farming License. For more information, contact the Manitoba Fisheries Branch, Manitoba Conservation, Winnipeg.

Setbacks

The siting of dugouts closer than prescribed distances to provincial highways and roads requires a permit. Generally, minimum setback distances range from 125 to 250 feet (40 to 75 meters) unless the site is adjacent to an intersection control circle, in which case the required setback ranges from 500 to 1500 feet (150 to 450 meters). Each permit is assessed individually with consideration given to future highway development and highway safety requirements. For more information, contact the Highways and Government Services, Highway Planning and Design Branch, Winnipeg.

Technical and Financial Assistance

For technical assistance and information about possible funding opportunities, contact the nearest PFRA district office or Manitoba Water Services Board.

Saskatchewan

Water Licensing

Ownership of all surface and groundwater is vested in the Province of Saskatchewan through the *Water Corporation Act*. The act requires that approval to construct, followed by an approval to operate, must be issued for any commercial, municipal, irrigation, or tank-loading facility dugout. No approvals are required for construction or use if the dugout is intended for domestic purposes as defined by the *Water Corporation Act*. However, on a domestic dugout, if a dam or diversion ditch is constructed to divert water from a natural watercourse or water-body to the dugout, then an “Approval to Construct and Operate” is required. Approvals to construct and operate a dugout are issued through Sask Water, Regional Water Resource offices in Saskatchewan.

Fish Stocking

If a dugout is private and contained with no potential discharge, it may be stocked with certain types of fish. A list of permitted fish is available from your local Saskatchewan Environment and Resource Management (SERM) office. Dugouts in Saskatchewan may not be stocked with native fish such as walleye, pike, and pickerel. If there is a potential discharge from the dugout into the waterway, fish may not be stocked due to the potential spread of disease. Before stocking fish in a dugout, contact the local SERM office for up-to-date information.

Setbacks

Each Rural Municipality has its own regulations and bylaws governing the location of dugouts with respect to roads. If a dugout is to be situated near a road, prior approval must be obtained. The standard RM regulation is a distance of at least 150 feet (45 meters) from the centerline of the road. Refer to the RM office for further information

Technical and Financial Assistance

For technical assistance and information about possible funding opportunities, contact the nearest PFRA district office or Sask Water office.

Appendix 2 Water Quality Guide

Table 1 Causes and Symptoms of Some Waterborne Diseases

Disease	Microbiological Agent	Symptoms
Bacterial gastroenteritis	Bacteria –various organisms including E. coli	Diarrhea or bloody diarrhea, abdominal cramps, fever, nausea, vomiting
Campylobacteriosis	Bacteria – campylobacter jejuni	Fever, abdominal pain, diarrhea or bloody diarrhea, nausea, vomiting
Cryptosporidiosis	Protozoa – cryptosporidia	Diarrhea, abdominal discomfort, slight fever, nausea, vomiting, headaches
Cyclospora infection	Protozoa – cyclospora	Diarrhea, bloating, abdominal cramps, nausea, vomiting, fever
Giardiasis	Protozoa – giardia	Diarrhea, abdominal cramps, nausea, vomiting, chills, headache, fever
Hepatitis	Virus – hepatitis A	Fever, chills, abdominal pains, jaundice, dark urine
Shigellosis	Bacteria – shigella	Diarrhea, or bloody diarrhea, fever, abdominal cramps
Typhoid fever	Bacteria – salmonella typhi	High fever, headache, constipation, loss of appetite, diarrhea, vomiting, abdominal rash
Viral gastroenteritis	Viruses – Norwalk type, rotaviruses, adenoviruses, enteroviruses	Diarrhea, vomiting, fever, headache, abdominal cramps

Table 2 Chemicals and Their Associated Risk to Human Health

Chemical	Source	Potential Health Effect	Canadian Drinking Water Quality Guideline (mg/L)
Aluminum	Natural deposits in earth and aluminum-based coagulants	Unknown; unproven links to Alzheimer's and Parkinson's diseases	Under review
Barium	Natural deposits in earth	Circulatory system effects	1
Boron	Natural deposits in earth	Damage to reproductive system	5
Copper	Natural deposits; corrosion products from piping	Gastrointestinal irritation at levels much higher than guideline	1*
Lead	Natural deposit and corrosion products from piping, solder, and some brass alloys	Damage to kidneys, reproductive and nervous systems; development damage in young children	0.01
Nitrate	Fertilizers; human or animal wastes	Methemoglobinemia in infants under six months; unproven link to some cancers	45
Pesticides (including various fungicides, herbicides, rodenticides and insecticides)	Agricultural activities (spraying and water runoff)	Various effects depending upon type of pesticide; suggested links to cancers, damage to liver, kidneys, nervous and reproductive systems	Varies depending upon pesticide (see Health Canada website or contact local health authority for specific details)
Petroleum hydrocarbons	Leak in fuel oil or gasoline tanks allowing seepage into water	Some hydrocarbons have been linked to various cancers, damage to liver, kidneys, nervous system	Under review
Phytoplankton toxins	Natural toxins produced and released by microscopic plants and algae	Liver and nervous system damage	Under review
Sodium*	Natural deposits in earth	Health risk only for individuals on salt-restricted diets	200**
Sulphate	Natural deposits in earth; some flocculants	At elevated levels causes laxative effect leading to dehydration	500***
Trihalomethanes	By-products of disinfection of water	Cancer	0.1****
Turbidity	Suspended mineral or organic material	Shelters pathogens from disinfection. Increases requirement for disinfectant	1 NTU*****

* Guideline established based on aesthetic quality. Adverse health effects are possible at levels much higher than guideline.

** Guideline established based on aesthetic quality. Adverse health effects possible only for those on salt-restricted diets.

*** Guideline established based on aesthetic quality. Consumption of water with elevated levels of sulphates may result in gastrointestinal irritation including diarrhea.

**** Average of four quarterly samples.

***** Nethelometric Turbidity Units

Table 3 Chemical Agents and Microbiological Species Affecting Aesthetic Quality of Water

Chemical/Species	Source	Symptom
Calcium	Natural deposits (limestone)	Hard water; scales and deposits in kettles and water heaters
Copper	Natural deposits; corrosion products from piping	Green staining of fixtures; metallic taste
Hydrogen Sulphide	Present in water with high iron content and low pH	Rotten egg odour
Iron	Natural deposits and iron-based coagulants	Rusty reddish-brown staining of fixtures and laundry; metallic taste
Iron bacteria	Bacteria feeding on iron in water	Reddish-brown slime on fixtures
Magnesium	Natural deposits	Hard water; scales and deposits in kettles and water heaters
Manganese	Natural deposits	Black staining of fixtures and laundry; metallic taste
Sodium	Natural deposits	Salty taste
Sulphate	Natural deposits; some flocculants	Objectionable taste
Sulphate	Bacteria feeding on sulphates in water	Rotten egg odour; blackish slime on fixtures
Tannins and Humic Acids	Natural organic matter (decaying plants and animals)	Various odours (aromatic, fishy, musty, earthy, woody) and tastes
Turbidity	Excessively fine sand or silt; runoff from soil	Abrasive texture to water; residue left in sink and tub
Zinc	Natural deposits; corrosion products from plumbing	Objectionable metallic taste

Appendix 3 Using Copper Products to Control Cyanobacteria

The Timing of Copper Treatment

Copper can be used to control cyanobacteria, often referred to as blue-green algae. If a treatment seems ineffective, do not repeat, or increase the dose. Copper will not control green or brown algae.

Cyanobacteria grow fast when water temperature starts to rise, usually after a period of warm sunny weather. Always treat at the beginning of the bloom. This will provide much better control. If you treat with copper, always wait a minimum of two weeks before using the water. A waiting period is critical to allow any toxins from cyanobacteria to dissipate. Copper treatments are most successful when pH is between 7 and 8, alkalinity is between 50 to 150 mg/L, water temperature is above 15 degrees C, and the weather is sunny and calm. Never compensate for poor conditions by increasing the chemical dose - this can create serious water quality problems, and make the water unsafe or even dangerous for use.

Calculating a Copper Dose

Cyanobacteria use sunlight and live near the water surface. Therefore, it is only necessary to treat the top meter of water. A simple calculation can be used to approximate treatment volumes. Measure the surface length and width in meters, and multiply to get the volume of the top meter of water. Multiply by 1,000 to convert the volume from cubic meters into liters. The chemical that causes toxicity is called the active ingredient. Copper is the active ingredient in most products for controlling cyanobacteria. Different products have different amounts of actual copper in the formulation. The table below shows the relative amounts of different products required to deliver the recommended copper dosage of 0.25 mg/L to the top meter of water in a standard as well as large dugout.

Table 1 Equivalent, Copper Application Rates for Chemicals Regulated by the Pest Management Regulatory Agency (Jan., 2001)

Item	Active Ingredient % Cu by Weight	Standard Dugouts (2 to 5 million Liters)	Large Dugouts (5 to 30 million Liters)
Dugout Example	-	20m x 50 m x 3.5m	50m x 150m x 6.0 m
Treatment Volume (Target the Top 1.0 m)	-	1.0 million L	7.5 million L
Top 1 m Treatment Dose	-	0.25 mg Cu/L	0.25 mg Cu/L
Copper Sulphate granular	25.4 %	1.0 kg	7.5 kg
Cominco Cupric granular	25.2 %	1.0 kg	7.5 kg
Phelps Dodge Triangle Brand granular	25.2 %	1.0 kg	7.5 kg
Cutrine Plus granular	3.7 %	6.8 kg	50.6 kg
Nalco Cuprose granular	19.1 %	1.3 kg	9.8 kg
Algi-Boss, liquid ⁺	5.0 %	4.1 L	31.3 L
Cutrine Plus, liquid ⁺	9.0 %	2.3 L	17.2 L
Polydex, liquid ⁺	5.0 %	4.1 L	31.3 L

Note: Reduce all application rates by about 60% if fish are present.

How to Apply Copper Treatments

Although cyanobacteria may be controlled, over-dosing a dugout with copper may cause a subsequent increase in the growth of green and brown algae.

Use a safe target dose as recommended by Table 1, being careful not to exceed the label rate. Read the label and product literature for any restrictions on product use.

Dilute the required amount of copper product into a volume of water so that it can be sprayed over the surface of the dugout. Spray the entire surface, with particular focus to areas where cyanobacteria populations are greatest. Spraying can be done from shore or from a boat. Alternatively, dry copper chemical can be put into a nylon sock, with ropes tied to both ends of the sock. Drag the chemical sock back and forth along the top of the water, covering the entire surface area. The dry compound will dissolve in the water. Spot treatment is also possible using one teaspoon (5 ml) of dry copper sulphate added to 1 gallon (5 liters) of water. Spot treat by spraying areas where cyanobacteria are starting to grow. Spot treatment may be useful when wind blows the bacteria against one shoreline.

Inspect the dugout once per week after treatment. Blooms can grow and die off within a one to two week period. A dugout should not be treated with copper more than four times during one open-water season.

Appendix 4 Contacts and References

Contacts

Prairie Water News

c/o Saskatchewan Research Council
125 – 15 Innovation Boulevard
Saskatoon, Saskatchewan S7N 2X8
Phone: (306) 933-5400 Fax: (306) 933-7446
E-mail: info@src.sk.ca
Website: <http://www.src.sk.ca>

Agriculture and Agri-Food Canada - PFRA

Headquarters
603 - 1800 Hamilton Street
Regina, Saskatchewan S4P 4L2
Phone: 1-800-667-7644 Fax: (306) 780-5018
Website: <http://www.agr.ca/pfra>

Alberta Agriculture, Food and Rural Development

201 J. G. O'Donoghue Building
7000 - 113 Street
Edmonton, Alberta T6H 5T6
Phone: (780) 427-2181 Fax: (780) 422-7755
Website: <http://www.agric.gov.ab.ca/>

Manitoba Conservation

Library Services
Suite 160, 123 Main Street,
Winnipeg, MB R3C 1A5
Phone: (204) 945-7126 Fax: (204) 948-2357
E-mail: wbarber@gov.mb.ca
Website: <http://www.gov.mb.ca/conservation/publications>

Manitoba Water Services Board

Intergovernmental Affairs
Province of Manitoba
2022 Currie Blvd.
PO Box 22080
Brandon, MB
Phone: 204-726-6076 Fax: 204-726-6290

Saskatchewan Health

Provincial Laboratory Environmental Sciences Section
3211 Albert Street
Regina, Saskatchewan S4S 5W6
Phone: (306) 787-3140 Fax: (306) 798-0046
Website: <http://www.health.gov.sk.ca/>

Saskatchewan Research Council

125 – 15 Innovation Boulevard
Saskatoon, Saskatchewan S7N 2X8
Phone: (306) 933-5400 Fax: (306) 933-7446
E-mail: info@src.sk.ca
Website: <http://www.quantumlynx.com/water>

Sask Water

Head Office
4th Floor, Victoria Place
111 Fairford Street East
Moose Jaw, Saskatchewan S6H 7X9
Phone: (306) 694-3900 Fax: (306) 694-3944
Website: <http://www.saskwater.com>

Internet Health References

Health Canada has a number of different websites available on the Internet that deal specifically with water quality and human health. Relevant sites that are current at the time of publication of this document are listed in the following table. For additional information regarding water quality issues and the impact on human health, contact your regional public health authority.

General information on drinking water quality guidelines:

<http://www.hc-sc.gc.ca/ehp/ehd/catalogue/general/iyh/dwguide.htm>

Canadian drinking water quality guidelines (detailed summary):

http://www.hc-sc.gc.ca/ehp/ehd/catalogue/bch_pubs/summary.pdf

Supporting documentation for drinking water quality guidelines:

http://www.hc-sc.gc.ca/ehp/ehd/catalogue/bch_pubs/dwgsup_doc/dwgsup_doc.htm

General information on water and human health:

<http://www.hc-sc.gc.ca/ehp/ehd/catalogue/general/97ehd215/water.pdf>

General fact sheet on water:

<http://www.hc-sc.gc.ca/hppb/healthyenvironment/waterfac.htm>

Chlorinated water and health effects:

http://www.hc-sc.gc.ca/ehp/ehd/bch/water_quality/chlorinated_water.htm

Giardia and cryptosporidium in drinking water:

<http://www.hc-sc.gc.ca/ehp/ehd/catalogue/general/iyh/giardia.htm>

Water treatment devices:

http://www.hc-sc.gc.ca/ehp/ehd/catalogue/general/iyh/disinfection_devices.htm

http://www.hc-sc.gc.ca/ehp/ehd/catalogue/general/iyh/water_treat/taste.htm

Questions and answers on bottled water:

http://www.hc-sc.gc.ca/food-aliment/english/organization/microbial_hazards/faqs_bottle_water_eng.html

Health Canada water quality activities:

http://www.hc-sc.gc.ca/ehp/ehd/bch/water_quality.htm

http://www.hc-sc.gc.ca/english/azindex_vwxyz.htm#W

Index

A

Aeration 88

aeration 44, 48, 52, 53, 54, 56, 86, 89, 94

agricultural impacts on water quality 19, 27, 32

algae 10, 11, 12, 14, 86, 89, 90, 91, 93, 94, 117

animal-operated pumping systems 57

available water 20

B

Backwashing 77

backwashing 71, 75, 77, 81

bacteria 12

best management practices 27, 32

Biological Filtration 71

biological filtration 71

C

Canadian Drinking Water Guidelines 114

climate 6

Coagulation 70, 91

coagulation 68, 70, 71, 75

coliform bacteria 64, 65, 66

colour 60, 70, 71, 77

Conventional Filtration 71

conventional filtration 71

copper sulphate (Bluestone) 89, 118

covers for dugout 93

cryptosporidia 61, 62, 66

cyanobacteria 12, 89, 92, 117, 118

D

diffuser 53, 54

disinfect 11

disinfectants 94

Disinfection 74, 78

disinfection 71, 74, 78

dissolved organic carbon 71

dissolved oxygen 44, 47, 52, 53, 54

dissolved solids 9

distiller 68, 74, 78, 84

Drinking Water 74, 84

drinking water 3, 68, 75

duckweed 14

E

E. coli 65, 66

erosion 25, 32

evaporation 20, 21

excavating equipment 37

F

fish 95

G

giardia 61, 66

gleization 36

government regulations 19

groundwater 8

H

Health 65

health 60, 61, 63, 66

Herbicides 91

hydrogen sulfide 47

I

inlet structures 33, 39

Intake 70

intake 44, 46, 47, 48, 54, 56

irrigation 3, 8

K

Karmex DF 91, 92

L

liners 36

livestock 3, 8, 18, 25, 27, 32, 33, 44, 56, 57

M

manure 25, 27

Monitoring 81

monitoring 75, 78

N

nutrients 8, 47, 52

O

odour 56, 60, 63

oxygen 10, 11, 44, 47, 52, 53

P

parasite 61, 62

pasture watering system 56, 57

pesticide 25, 27

pesticides 3, 10

pitless adapters 47

pressure tank 48, 49, 50, 51

Protozoa 60, 61

protozoa 66

Provincial Regulations 109

pump 48, 49, 50, 51, 53, 54, 57

R

Reverse Osmosis 79

reverse osmosis 68, 74, 84

Reward (Diquat) 91, 92

runoff 18, 19, 20, 21, 25, 27, 29, 30

S

sealing methods 39

sealing methods 35, 36

sedimentation in dugouts 33

sedimentation dugout 88, 89

shock chlorination 77

sizing 18, 20, 21, 25

soil deposition 14

solar power 53, 57

T

taste 60, 63

Tilapia 95

total dissolved solids (TDS) 79

U

Ultraviolet Light 78

ultraviolet light 74

V

vegetation control 88

Virus 60, 62

virus 66

W

water filtration 71, 77, 78, 84

water sampling, analysis and interpretation 65

Water Treatment 67

water treatment 81, 84

water treatment systems 68

watershed 18, 19, 21, 25, 27

wet well 44, 46, 47, 48

windmill 54

Z

zooplankton 10