


Evaluation Report

38

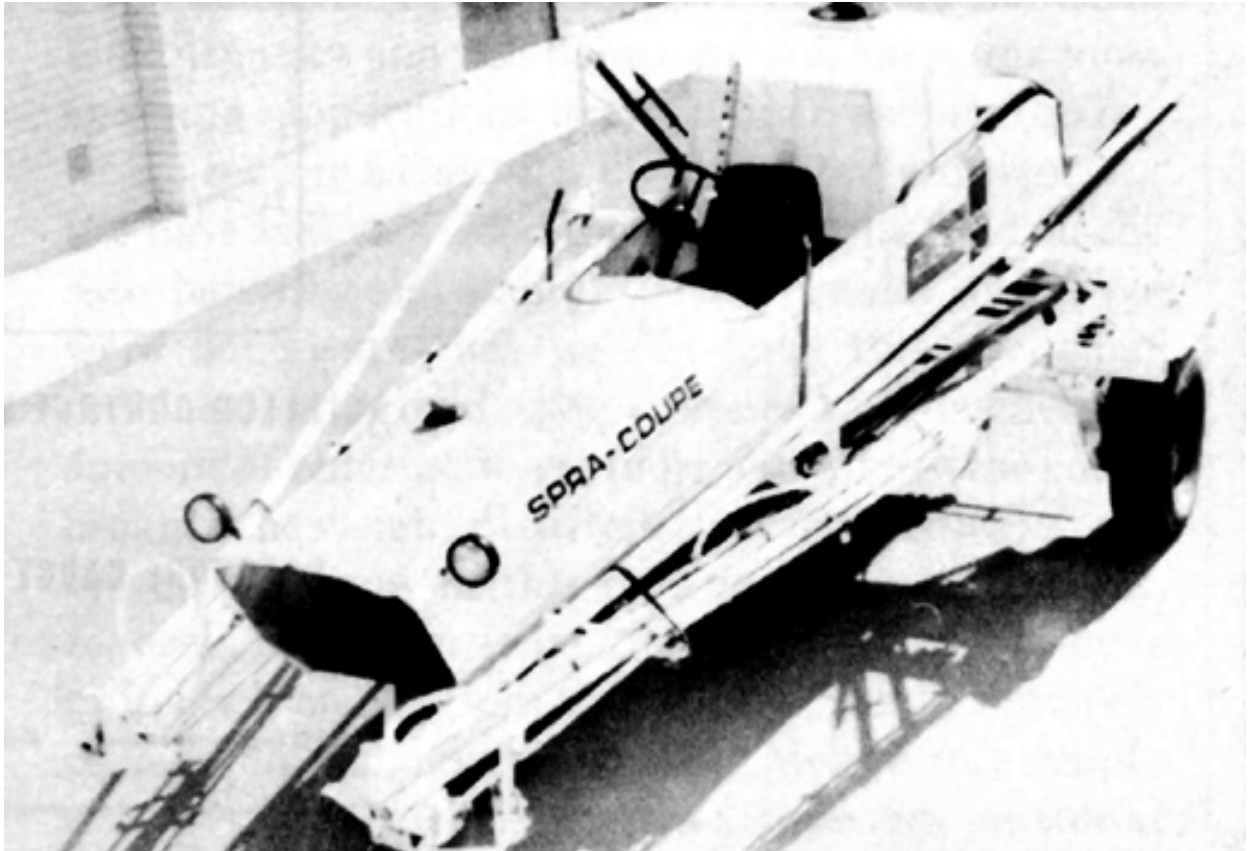

Melroe Model 103 Spracoupe

A Co-operative Program Between



Melroe Model 103 Spra-Coupe

Manufacturer and Distributor:

Clark Equipment Company
Melroe Division, Ag Products
403 Airport Road
Bismarck, North Dakota 58501

Retail Price:

\$6,206.72 (April, 1977, f.o.b. Bismarck, North Dakota)

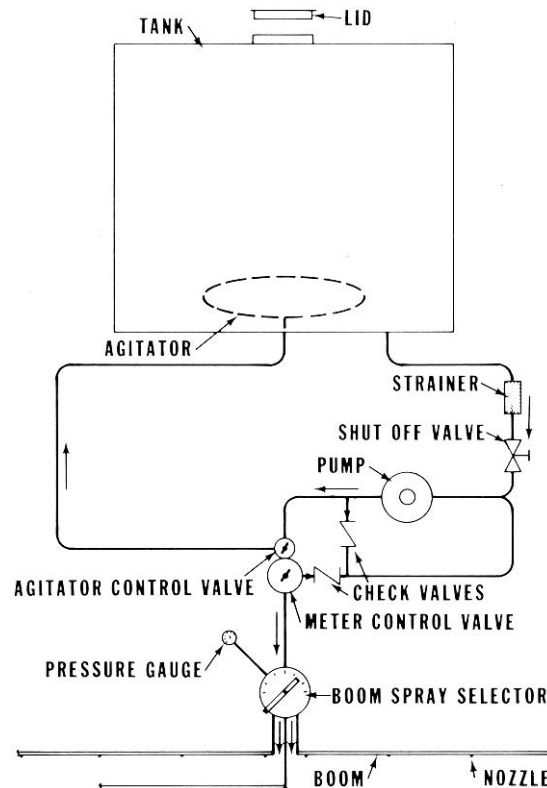


Figure 1. Flow Diagram for Melroe Spra-Coupe Model 103.

Summary and Conclusions

Functional performance of the Melroe model 103 Spra-Coupe was fair. Functional performance was reduced by poor spray patterns, excessive spray drift and a small spray tank. An extended durability test was not conducted. Durability of the Spra-Coupe during functional evaluation was very good.

The Spra-Coupe operated satisfactorily in third gear at 23 km/h (14 mph) on smooth fields, resulting in a field capacity of 36 ha/h (89 ac/h). The Spra-Coupe was difficult to control on rough fields in third gear. Operation in second gear at 13 km/h (8 mph) was satisfactory for all field conditions giving a field capacity of 21 ha/h (51 ac/h).

Since the outer boom ends were unsupported, a large variation in boom height, with resultant irregular spray patterns, occurred on rolling fields. Nozzle distribution patterns were unacceptable at pressures below 345 kPa (50 psi) and above 460 kPa (67 psi). The most acceptable distribution patterns were obtained at 415 kPa (60 psi), however, it was not possible to obtain very uniform distribution patterns. As a result of the high nozzle pressure, spray drift was excessive. The nozzle tips were too small to apply the recommended water for commonly used herbicides. The 491 L (108 gal) supply tank was too small, requiring frequent filling when using larger nozzle tips. Nozzle wear during 73 hours of operation increased output by less than 2%. The nozzle check valves effectively prevented nozzle drip when the spray booms were shut off.

Pump capacity was adequate. Filtering was adequate and strainer plugging was infrequent. The pressure drop through the plumbing system to the booms was high, indicating flow restrictions. There was no pressure drop along the booms, indicating that boom size was adequate.

Controls were conveniently located but pressure adjustment was sensitive. Calibration was easily done by matching ground speed (gear) and nozzle pressure. Nozzle angle was easily adjusted but the boom height could not be changed. The boom lifting levers were convenient in avoiding obstacles. Transporting was convenient. Filling the supply tank was inconvenient and the tank lid leaked, spilling chemical near the operator. The operator's manual was well written and clearly outlined operation, maintenance service and calibration.

The Spra-Coupe did not turn readily in soft fields and when starting, the front wheel lifted off the ground. The Spra-Coupe was rough to ride with a partially full spray tank.

The engine had sufficient power for all field conditions encountered. Fuel consumption varied from 9 L/h (2 gal/h) in average fields to 18 L/h (4 gal/h) in soft fields. Noise at the operator's ear level was about 89 decibels (A scale).

Only minor mechanical problems occurred during the test: the original spray pump had been run dry and required replacement while pump drive belts broke twice.

Recommendations

It is recommended that the manufacturer consider:

1. Modifications to improve spray distribution.
2. Modifications to reduce spray drift.
3. Supplying higher capacity nozzles as standard equipment.
4. Modifications to allow the use of different types of nozzles.
5. Modifications to indicate actual nozzle pressure.
6. Modifications to decrease the sensitivity of the pressure adjustment.
7. Supplying a high capacity 100 mesh strainer at the tank filler opening.
8. Supplying a larger spray tank.
9. Modifications to improve handling, ride and stability.
10. Supplying a roll-bar and seat belts as standard equipment.
11. Supplying amber flashing transport lights.
12. Providing a parking brake.
13. Providing a safety interlock to prevent starting the engine with the transmission in gear.
14. Modifications to the tank lid to prevent chemical splashing near the operator.
15. Preparing the operator's manual in both SI and English units.
16. Modifications to increase spray pump drive belt life.

Chief Engineer: E.O. Nyborg

Senior Engineer: E.H. Wiens

Project Engineer: K.W. Drever

The Manufacturer States That:

With regard to recommendation number:

1. Melroe Engineering has run several tests on the Spra-Coupe and determined that our distribution pattern is very good. The only thing that we can determine from your report is that you have checked the spray pattern at 36 inches from the boom rather than at the recommended 28 to 30 inches. We set this spray boom at 36 inches because it is designed to spray crops in the range of six inches to nine inches from the ground.
PAMI Note: Boom height was not adjustable and most Western Canadian crops are sprayed before they grow to a six or nine inch height.
2. Our tests have determined that at the reduced pressure of 40 psi and the correct distance from the spray nozzles we do have relatively good coverage. We also offer several different nozzles so that a proper gallonage per acre can be obtained at the lower pressure.
3. Melroe will not have a standard nozzle for the Spra-Coupe, but offer about five different nozzle sizes in different capacity ranges. Therefore, the customer can order the nozzle to fit his needs.

4. The Melroe boom is not adjustable up and down any more than we can rotate the nozzle from the top of the boom to the bottom of the boom, but we do offer several different 730 nozzles for different gallonage per acre.
5. We are in the process of recalibrating our present Spra-Coupe and will compensate in our chart for the pressure drops across the valves and through the nozzle.
6. Along with the recalibration program we are looking at a different type of valve arrangement that will eliminate this problem.
7. Several companies do make strainers of this type. The request had not been made before this time, but it can be readily obtained.
8. Melroe has increased the size of the spray tank from 108 gallons to 126 gallons. We feel that the extra tank capacity and the pump are sufficient for most spraying applications and to increase it further would require a considerable amount of redesign.
9. We have had very good reports from the field on the ride, handling and stability of our present coupe. We were not aware that we did have this particular problem. It would also require a considerable amount of redesign to get more stability to the coupe because the weight distribution is very critical.
10. We do not know at this time of any requirements, federal or state, that do require a roll-over protection on the Spra-Coupe. This would require a considerable amount of redesign. Melroe does supply a seat belt for the Spra-Coupe as optional equipment.
11. If this does become a requirement in Canada, we could supply a set of amber lights as optional equipment.
12. It would be very difficult to install a parking brake on our present Spra-Coupe, but future redesign will definitely incorporate a parking brake on the Spra-Coupe.
13. Melroe is not aware that this has been a problem and do not know of any governmental regulation that requires this.
14. We have recently released a new type of lid for the tank that seals much tighter than the old one and eliminates splashing through the cover.
15. We are aware that Canada has this requirement and we do have a program started to convert all of our decals, owner's manuals, etc. to SI units.
16. We have recently redesigned the shield that holds the belt on the pulley so that it does eliminate a considerable amount of the wear problem.

General Description

The Melroe model 103 Spra-Coupe is a self propelled, boom type sprayer. It is powered by a Volkswagen industrial engine through a four speed transmission. The Spra-Coupe is supported on three wheels. The rear wheels provide ground drive and the front wheel is used for steering. Conventional automotive controls are used.

The operator is located at the centre of the Spra-Coupe immediately in front of the 451 L (108 gal) polyethylene spray tank. The tank is equipped with hydraulic agitation and a liquid level indicator. The engine and booms are mounted at the rear. The Spra-Coupe has 21 nozzles spaced at 762 mm (30 in) resulting in a spraying width of 16,000 mm (52.5 ft). Nozzles are equipped with check valves to prevent boom drip when the boom control is shut off. The booms fold forward for transport. Spray controls are located on the right side of the instrument panel. The nylon roller pump is belt driven from the engine.

Figure 1 shows the flow diagram for the Spra-Coupe while complete specifications are found in Appendix I.

Scope of Test

The Melroe model 103 Spra-Coupe was operated for 73 hours in the conditions shown in Table 1 while spraying about 1629 ha (4027 ac). It was evaluated for quality of work, distribution patterns, nozzle wear, pump capacity, ease of operation, operator safety and suitability of the operator's manual.

Table 1. Operating Conditions.

Chemical Applied	Hours	Speed		Spraying Rate		Field Area	
		km/h	(mph)	ha/h	(ac/h)	ha	(ac)
2,4-D	49	13	8.0	21	(51)	1011	(2499)
Banvel							
2,4-D Mixture	16	13	8.0	21	(51)	330	(816)
2,4-D	8	23	14.0	36	(89)	288	(712)
TOTAL	73					1629	(4027)

Results and Discussion

QUALITY OF WORK

Distribution Patterns: Distribution patterns using the LF 77 - 730 Delavan nozzles supplied with the sprayer were unacceptable unless extremely high pressures were used. Figures 2 and 3 show the spray distribution patterns along the length of the boom when operated at 140 and 415 kPa (20 and 60 psi) respectively. The coefficient of variation* at

*The coefficient of variation (cv) is a measure of distribution pattern uniformity. The lower the cv, the more uniform is the spray coverage. Some researchers claim that a cv below 10% indicates very uniform coverage while a cv above 15% indicates inadequate uniformity of coverage for chemicals having a narrow range of application rates. The cv's shown in this report were determined in stationary laboratory trials. Field trials have shown that the cv in actual field conditions may be up to 10% higher than that obtained in stationary tests due to boom vibration and wind effects. Manufacturer recommendations for different chemicals vary as to the acceptable range of application rates. For example, 2,4-D solutions have a fairly wide range of acceptable rates ($\pm 14\%$) while chemicals such as Buctril M have a very narrow acceptable range.

140 kPa (20 psi) was 35% and application rates along the boom varied from 8 to 36 L/ha (0.7 to 3.2 gal/ac) at a forward speed of 8 km/h (5 mph). High application occurred below each nozzle with low application occurring between nozzles due to insufficient spray overlap. At 415 kPa (60 psi) the spray distribution improved due to improved spray overlap (Figure 3). The coefficient of variation was 12% and application rates varied from 24 to 41 L/ha (2.1 to 3.6 gal/ac). However at this pressure the spray drift hazard was high.

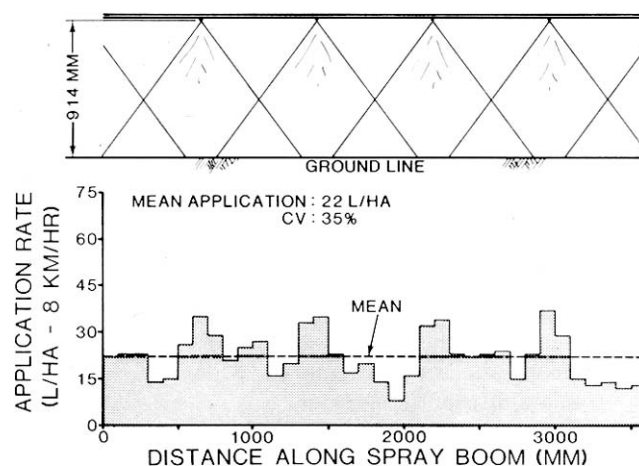


Figure 2. Distribution Pattern or a Section of Spray Boom at 140 kPa (20 psi) Pressure using LF 77-73° Nozzles, 914 mm (36 in) above the Ground.

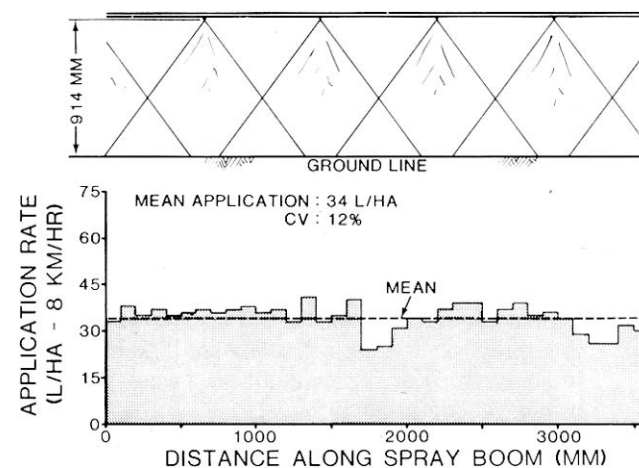


Figure 3. Distribution Pattern or a Section of Spray Boom at 415 kPa (60 psi) Pressure using LF 77-73° Nozzles, 914 mm (36 in) above the Ground.

Figure 4 shows the spray pattern uniformity at various pressures. Spray patterns were unacceptable at pressures below 345 kPa (50 psi) or greater than 460 kPa (67 psi). The best distribution pattern was obtained at 415 kPa (60 psi) but a very uniform distribution could not be obtained with the Spra-Coupe. Modifications are required to improve spray distribution.

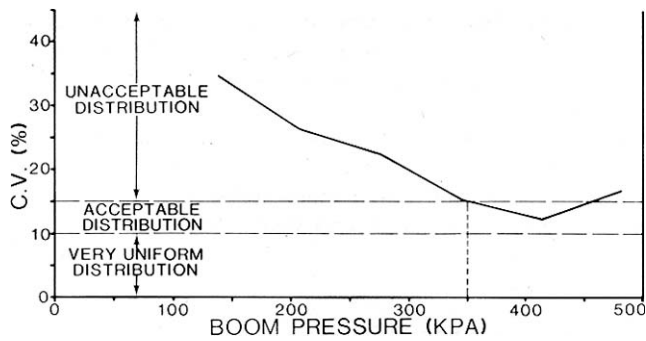


Figure 4. Spray Pattern Uniformity at Various Nozzle Pressures.

Spray Drift: Work by the Saskatchewan Research Council¹ indicates that drift from the Spra-Coupe was 5% of the material sprayed or greater, depending on wind conditions, at 280 kPa (41 psi) pressure. To obtain an acceptable spray distribution with the Spra-Coupe, a pressure of 345 kPa (50 psi) or higher was required (Figure 4). At this pressure, smaller droplets would be produced, resulting in expected spray drift greater than 5%. The Spra-Coupe boom height was higher than most conventional trailed sprayers which would also contribute to increased spray drift.

Nozzle Calibration and Wear: Figure 5 compares the delivery rates of the Delavan LF 77-730 brass nozzles when new and after 73 hours of operation. Nozzle deliveries when new were similar to the manufacturer's rated capacity. Nozzle wear during the field operation caused the output of

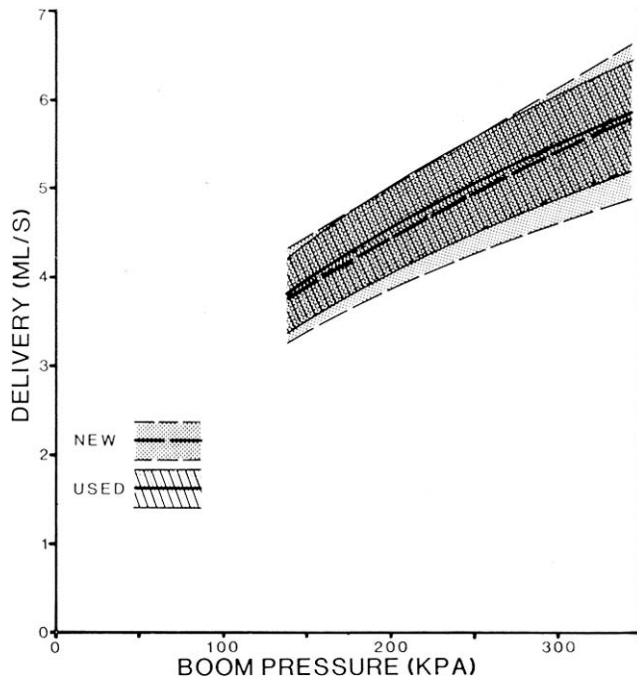


Figure 5. Delivery Rates of Delavan LF 77-730³ Nozzles - New and Used 73 Hours.

¹Maybank, J, Yoshida, K., Shewchuk, S.R., "Comparison of Swath Deposit and Drift Characteristics of Ground-Rig and Aircraft Herbicide Spray Systems Report of the 1975 Field Trials", Saskatchewan Research Council Report number P76-1, January, 1976, p.20.

the nozzles to increase by 1.6%. Some researchers indicate that a nozzle needs replacement once delivery has increased by more than 10%. Nozzle wear depends on the type of chemicals sprayed and water cleanliness.

Figure 5 shows the variability among individual nozzles. The shaded areas represent the range over which the deliveries from 10 nozzles varied when new and after field tests. A narrow range indicates that nozzle discharges are very similar while a wider range indicates more variability among individual nozzle deliveries. Variability among individual nozzle deliveries on the Spray-Coupe was high. The coefficient of variation of the nozzle deliveries was 7.1% when new but decreased to 5.3% after field tests.

Application Rates: Figure 6 shows the range of application rates that were possible using the Delavan LF 77-730 nozzles, supplied with the Spra-Coupe, over a pressure range from 138 to 414 kPa (20 to 60 psi). It also shows the normally recommended range of water application rates for commonly used herbicides on the prairies. Delivery from the nozzles was too low to apply sufficient water in all cases. The maximum application rate was 37 L/ha (3.3 gal/ac) in first gear with lower rates at higher operating speeds. The range of application rates recommended for most herbicides used on the prairies is 45 to 170 L/ha (4 to 15 gal/ac). It is recommended that the manufacturer supply higher capacity nozzles as standard equipment so that application rates are within the recommended range. The higher capacity nozzles would have the added advantage of less spray drift since droplet size would be larger.

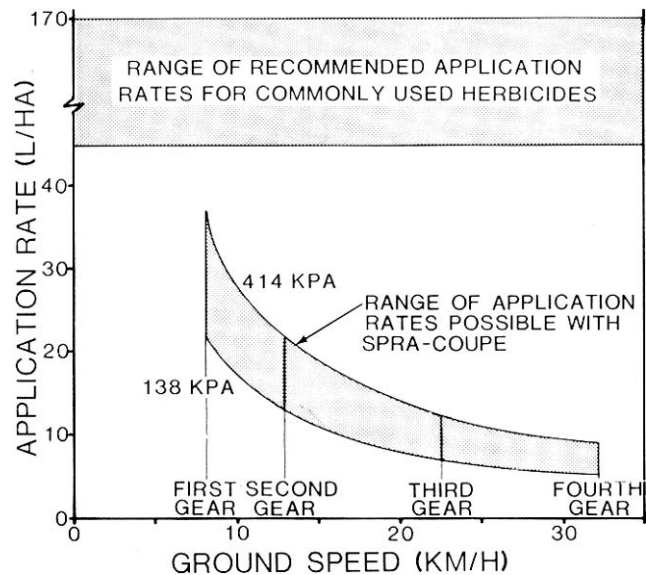


Figure 6. Application Rates for the Spra-Coupe using Delavan LF 77-730 Nozzles.

Use of Optional Nozzles: The nozzle assemblies (Figure 7) accepted a wide range of nozzle tips. Nozzle angle was adjustable from 90° ahead to 90° back so nozzle spray could be directed at any desired angle. Nozzle height was not adjustable. Only a limited selection of nozzle types was possible due to improper spray overlap that would occur with nozzles different than 730 fiat fan nozzles.

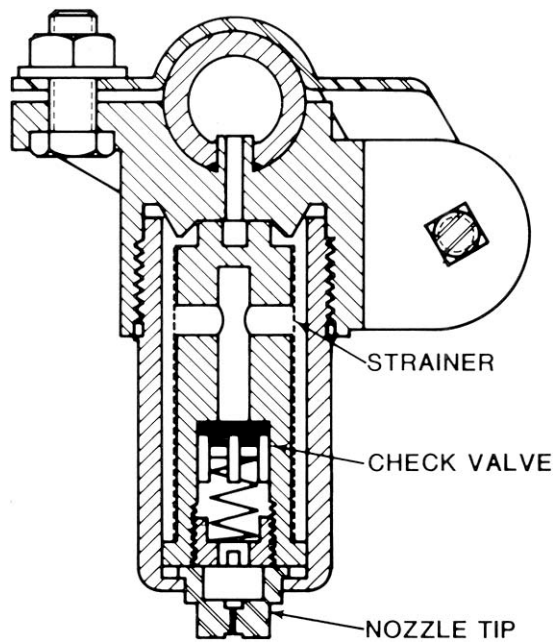


Figure 7. Cross Section of Nozzle.

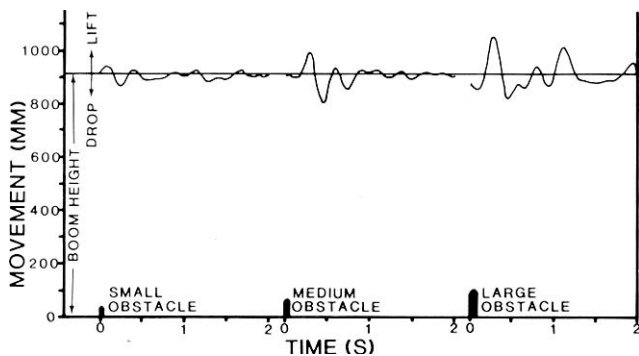


Figure 8. Vertical Boom Movement at Boom End (lift and drop) when the Spra-Coupe was Driven over Different Obstacles at a Forward Speed of 13 km/h (8 mph) (second gear).

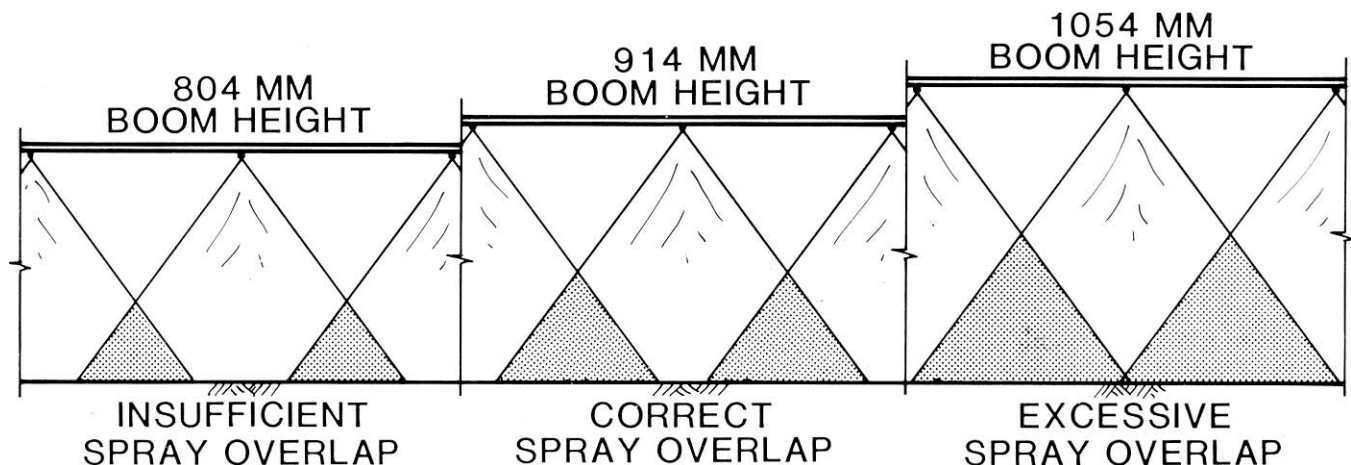


Figure 9. The Effect of Boom Lift and Drop on Spray Overlap.

Booms: The Spra-Coupe was driven over a series of standard obstacles to determine boom stability. The obstacles were semi circular in cross section with lifts of 40, 65 and 105 mm (1.6, 2.6 and 4.1 in). The Spra-Coupe was driven over the obstacles at full throttle in first, second and third gear, at speeds of 8, 13 and 23 km/h (5, 8 and 14 mph). Horizontal boom movement in the direction of travel and vertical boom movement were measured at the boom end and at the centre of the sprayer.

Figure 8 shows vertical boom movement (bounce) at the end of the boom when the Spra-Coupe was driven over the obstacles at 13 km/h (8 mph). The maximum movement at the end of the boom was a lift of 140 mm (5.5 in) and a drop of 110 mm (4.3 in). This resulted in a variation in boom height above the ground from 1054 mm (41.5 in) to 804 mm (31.7 in) compared to the correct boom height of 914 mm (36 in). Figure 9 compares the nozzle overlap at these three boom heights.

The lift and drop at the centre of the boom were about half that at the boom end when travelling over the small and medium sized obstacles. When going over the large obstacles, boom movement was about the same as at the end. Operation in first gear caused vertical boom movements similar to those in second gear. Driving over the obstacles in third gear resulted in boom movements about half as large.

Driving over an obstacle with the Spra-Coupe also caused the forward speed of the boom to vary in relation to the operating speed, since the boom initially deflects rearward and then springs forward. Figure 10 shows the forward speed of the boom end relative to the ground when the Spra-Coupe was driven over the standard obstacles. Boom forward speed is important since application rate is inversely proportional to speed (doubling the forward speed cuts the application rate in half). Assuming that the nozzle spray follows boom movement, the traces of speed illustrate the resultant variation in application rates. High application rates occur at low speeds and low application rates occur at high speeds. Extremely high variations in application rates can result for short periods of time due to horizontal boom movement. For example, driving over the 65 mm (2.5 in) obstacle at a forward speed of 13 km/h (8 mph) caused boom

speed to vary from 7 to 19 km/h (4.4 to 11.8 mph). Respective application rates would vary from 34 to 2 L/ha (3 to 0.2 gal/ac). This variation occurred in only 0.16 second during which time the sprayer travelled 580 mm (23 in). Speed changes due to horizontal boom movement were very similar on the Spra-Coupe in first, second and third gear. This caused the percentage speed changes to be less at the higher operating speeds. This, combined with the smaller vertical boom movements measured in third gear leads to the conclusion that operation of the Spra-Coupe at higher speeds results in less boom movement. However, on rough ground the Spra-Coupe was difficult to control at higher speeds.

The data presented in Figure 10 are based on the assumption that the nozzle spray output follows boom movement over very short periods of time (0.16 second). The extreme variations in applications that are suggested due to boom movement indicate that more research is required on boom stability and its effect on nozzle discharge and spray distribution.

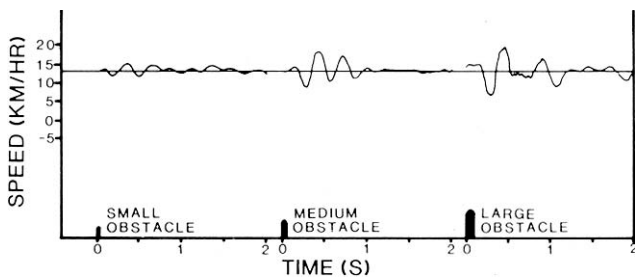


Figure 10. Variation in Boom End Speed when the Spra-Coupe is Driven over Different Obstacles at an Average Forward Speed of 13 km/h (8 mph) (second gear).

Operation of the Spra-Coupe on rolling land resulted in large variations in boom height. Operation on a side slope caused the ends of the boom to be close to the ground (Figure 11) resulting in insufficient overlap of the spray pattern.




Figure 11. Variation of Boom Height on Sidehills.

Pressure Losses in Plumbing System: Pressures in the plumbing system were measured at the pump outlet, boom control, boom inlet and boom end using four sets of nozzle tips capable of application rates ranging from 30 to 300 L/ha (2.7 to 26.7 gal/ac) operating in first gear at 8 km/h (5 mph). The same nozzles operating in third gear at 23 km/h (14 mph) would apply chemicals over an application rate range from 11 to 107 L/ha (1 to 9.5 gal/ac).

Figure 12 shows the pressures at the various locations when applying 30 to 300 L/ha (2.7 and 26.7 gal/ac) at 8 km/h (5 mph) at a boom control valve pressure of 275 kPa (40 psi). The pressure at the pump outlet was 620 kPa (90 psi). The high pressure at the pump outlet occurred at all pressure settings and with different nozzle sizes. High pump pressure was due to flow restrictions caused by the agitator and meter

valves (Figure 1). This did not affect the calibration of the Spra-Coupe but it reduced pump output.

With 30 L/ha (2.7 gal/ac) low capacity nozzles, pressure losses from the boom control valve to the booms were small. With 300 L/ha (26.7 gal/ac) high capacity nozzles, pressure losses from the control valve to the boom were up to 170 kPa (25 psi) which affected calibration and nozzle distribution patterns. In addition, there was a 41 kPa (6 psi) pressure drop across the nozzle check valves.

Figure 13 shows the pressure losses from the control valve gauge to the nozzles at various application rates in each gear. For example, application at 100 L/ha (8.9 gal/ac) in third, second and first gears resulted in corresponding pressure losses of 170, 105 and 65 kPa (25, 15 and 9 psi) from the control valve to the nozzles. At lower application rates such as 50 L/ha (4.5 gal/ac) the pressure losses were 95, 54 and 45 kPa (14, 8 and 7 psi). For accurate calibration and proper

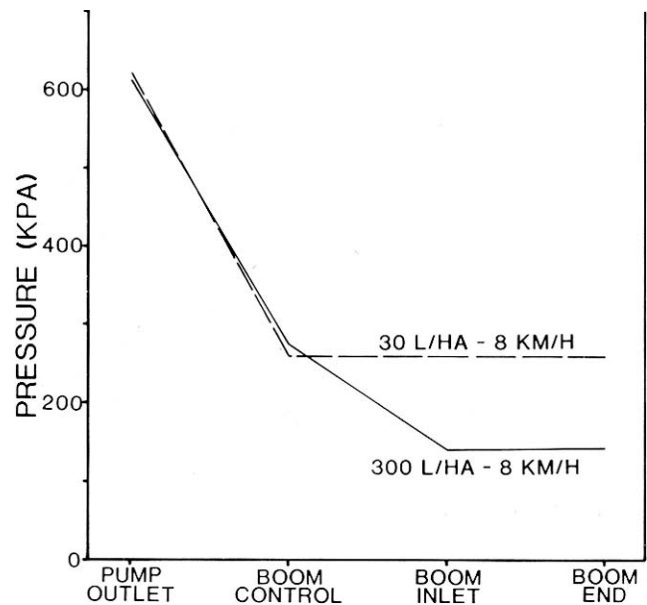


Figure 12. Pressure Losses through the Plumbing System Applying 300 and 30 L/ha (26.7 and 2.7 gal/ac) in First Gear.

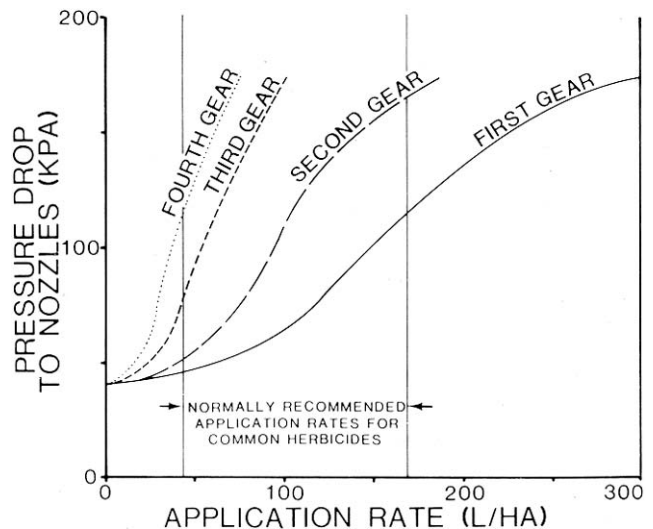


Figure 13. Pressure Losses from the Control Valve to the Nozzles at Various Application Rates and Operating Speeds.

distribution patterns, pressures at the boom control should be set higher by amounts indicated on Figure 12. Modifications are required so that actual pressure is known.

Pressure drops from one end of the boom to the other were negligible with all sizes of nozzles (Figure 12), indicating adequate boom size.

Pressure Gauge: The pressure gauge read 14 kPa (2 psi) high throughout the test. This was insignificant compared to the pressure losses from the boom control to the nozzles.

The pressure gauge was calibrated only in psi. Due to the present changeover to the SI (metric) system, a pressure gauge calibrated in both psi and kPa or suitable conversion tables should be supplied with the sprayer.

Tank Filler Strainer: No strainer was provided at the tank opening. A fine (100 mesh) high capacity strainer would be desirable to strain out foreign particles before they enter the tank.

Line Strainer: The 80 mesh screen in the line strainer adequately removed most abrasive materials that could damage the pump. The plastic strainer bowl was conveniently removed for cleaning without tools.

Nozzle Strainers: The 80 mesh nozzle strainers prevented nozzle plugging. The check valves located in the nozzle strainers (Figure 7) stopped boom drip when the boom control valve was shut off.

Soil Compaction and Crop Damage: The sprayer wheels travelled over approximately 2.5% of the total field area sprayed. The soil contact pressure was very similar to that of an unloaded pickup truck, and would probably cause some crop damage. The average soil contact pressure under the sprayer wheels, with a full tank, are given in Table 2.

Table 2. Soil Compaction by Sprayer Wheels.

	Average Soil Contact Pressure		Tire Track Width	mm (in)
	with Tank Full*	Full*		
	kPa	(psi)		
Front Wheel	172	(25)	102	(4.0)
Rear Wheel	234	(34)	150	(5.9)

* For comparative purposes an unloaded pickup truck has an approximate soil pressure of 207 kPa (30 psi).

PUMP CAPACITY

Agitation Capacity: The pump, when new, delivered 1.08 L/s (14.2 gal/min) at 1270 rpm pump speed (full engine throttle) throughout the normal operating pressure range (Figure 14).

Table 3 shows the maximum rates of emulsifiable concentrates and wettable powders that the Spra-Coupe pump could apply and still provide sufficient agitation¹ to keep solution in the tank properly mixed. It also shows the maximum application rates if a 20% pump wear allowance is assumed.

The table shows that pump capacity was adequate for tank agitation and applications over 225 L/ha (20 gal/ac) in

first gear and 56 L/ha (5 gal/ac) in fourth gear. This is a very suitable range for herbicides currently used on the prairies.

Table 3. Pump Capability - Maximum Application Rates.

Gear	Application Rate							
	Emulsifiable Concentrates				Wettable Powders			
	New Pump	20% Pump	Wear	Wear	New Pump	20% Pump	Wear	Wear
L/ha	(gal/ac)	L/ha	(gal/ac)	L/ha	(gal/ac)	L/ha	(gal/ac)	
First 8 km/h (5 mph)	266	(23.7)	217	(19.3)	233	(20.7)	182	(16.2)
Second 15 km/h (8 mph)	166	(14.8)	135	(12.0)	145	(12.9)	115	(10.2)
Third 23 km/h (14 mph)	95	(8.5)	78	(6.9)	83	(7.4)	65	(5.8)
Fourth 32 km/h (20 mph)	66	(5.9)	54	(4.8)	58	(5.2)	46	(4.1)

Operation at Reduced Speed: Figure 14 shows that reducing pump speed from 1270 rpm (full engine throttle) to 590 rpm (half throttle) resulted in a 36% reduction in pump capacity. Reduction in pump speed could occur when reducing speed to turn a corner or when operating at reduced engine speed to obtain a correct ground speed to suit nozzle calibration.

Pump Wear: Pump capacity decreased by 17% after the 73 hours of field operation. Pump wear depends on the type of chemicals sprayed and abrasive materials in the water.

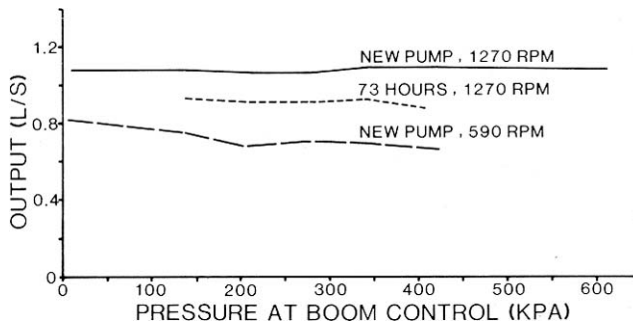


Figure 14. Pump Curves.

ENGINE

Power: The engine had sufficient power for all types of normal spraying operations.

Fuel Consumption: Fuel consumption varied from 9 L/h (2 gal/h) in average fields to 18 L/h (4 gal/h) in soft fields.

EASE OF OPERATION

Calibration: The Spra-Coupe was conveniently calibrated by matching gear selection and pressure indicated on the calibration chart supplied by the manufacturer. The calibration charts were in error due to pressure losses between the control valve and the booms.

¹Normally recommended agitation rates for emulsifiable concentrates such as 2,4-D are 0.03 L/s per 100 L of tank capacity (1.5 gal/min per 100 gal of tank capacity). For wettable powders Such as Atrazine and Sevin, recommended agitation rates are 0.05 L/s per 100 L of tank capacity (3.0 gal/min per 100 gal of tank capacity).

Controls: The Spra-Coupe was controlled with a steering wheel. Throttle, brake and clutch controls were the standard automotive type. The gear shift was conveniently located.

Location of spray controls was convenient. Flow of chemicals to the booms was controlled with one lever. Pressure and agitation were controlled with two variable orifice valves (Figure 1). These valves were inconvenient to set since pressure adjustment was very sensitive. A small movement of the agitator or the meter control lever resulted in a large change in pressure. It is recommended that modifications be made to make pressure adjustment less sensitive.

At the start of the evaluation, there was interference between the accelerator control rod and the pump control lever (Figure 15). New holes were drilled and the pump control lever was moved left to eliminate interference.

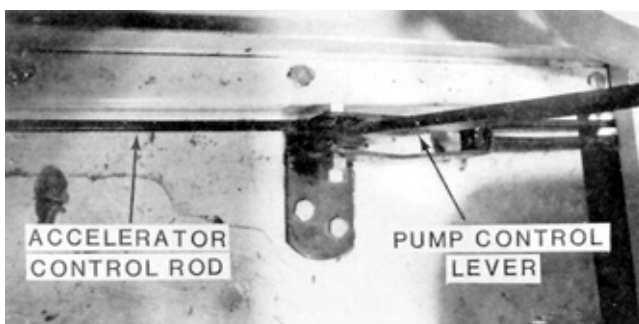


Figure 15. Interference Between Pump Lever and Throttle Rod.

Maneuverability and Handling: The Spra-Coupe was easy to handle in first, second or third gear on smooth fields. On rough fields, the front wheel bounced excessively in third gear causing steering difficulty. When turning in soft ground the front wheel skidded unless speed was reduced. Modifications are required to improve steering.

Ride was rough with a partially full spray tank. Operation at higher speeds improved the ride but increased handling problems. Modifications to improve ride are desirable.

Boom Levers: The levers for lifting the booms were convenient in avoiding field obstacles. The boom end had a breakaway feature to prevent serious damage if it struck an object.

Transport: The Spra-Coupe could be folded into transport by one man in five minutes. Mounting the sprayer in transport position was awkward since the operator had to climb over the booms (Figure 16).

The Spra-Coupe transported well at its maximum speed of 32 km/h (20 mph). For transporting at higher speeds a tow hitch was provided. The rear axle chains had to be removed to tow at speeds above 32 km/h (20 mph).

Spray Tank: The 491 L (108 gal) spray tank was too small. Frequent filling of the tank was required if recommended water application rates were followed. For example, applying 112 L/ha (10 gal/ac) in second gear would require a tank refill every 13 minutes. A larger tank would be desirable to minimize frequent stops while spraying.



Figure 16. Awkward Mounting in Transport.

The 206 mm (8 in) opening was adequate for adding chemicals and water. The tank filler opening was 1820 mm (6.0 ft) above ground which was high for filling by gravity from a nurse tank on a farm truck. This also made it awkward for adding chemicals. Modifications to make tank filling more convenient would be desirable.

Nozzle Adjustment: Nozzle angle was easily adjusted without the use of tools by rotating the nozzle assembly (Figure 7). Nozzle height was not adjustable. The boom could be levelled by adjusting the nut at the top of the spring loaded boom support.

Nozzle Cleaning: The nozzle assemblies could be removed for cleaning without the use of tools.

Servicing and Cleaning: The Spra-Coupe was convenient to service. Grease fittings were accessible except for the fitting located on the front wheel fork shaft. The tank was easy to drain by removing a plug at the back of the sprayer.

OPERATOR SAFETY

Stability: There was a tendency for the front wheel to lift off the ground when starting out in the field. More weight on the front wheel is required.

It is recommended that the manufacturer supply a roll bar and seat belt as standard equipment to minimize operator injury if the machine should upset.

On-Road Visibility: The Spra-Coupe was equipped with head lights, a tail light, a slow moving vehicle sign and rear reflectors on the fenders. It is recommended that the manufacturer consider supplying amber flashing lamps complete with turn signals to make the sprayer more visible on highways and roads.

Parking Brake: The Spra-Coupe was not equipped with a parking brake. This was a hazard when parking on a slope. A parking brake should be supplied as standard equipment.

Safety Interlock: The ignition switch was accessible from the ground and it was possible to start the engine with the transmission in gear. It is recommended that a safety switch be installed as standard equipment so that the engine can not be started when the transmission is in gear.

Caution: Operators of all spraying equipment are cautioned to wear suitable eye protection, respirators and clothing to minimize operator contact with the chemical.

Although many commonly used agricultural chemicals appear to be relatively harmless to humans, they may be quite deadly. In addition, little is known about the long term effects of human exposure to many commonly used chemicals. In some cases, the effects may be cumulative, causing harm after continued exposure over a number of years.

Location of Operator: The operator was located immediately ahead of the sprayer tank and booms. Spray drift from the rear would expose the operator to the chemical. The tank lid leaked when the tank was full, causing chemical to splash near the operator. A better tank lid seal is required.

Noise: The total noise at operator ear level was about 89 decibels (A scale) when spraying on fiat fields at full engine speed. According to current operator exposure recommendations, this level is not expected to cause any permanent hearing impairment for eight hours of operation per day, or less.

OPERATOR'S MANUAL

The well illustrated operator's manual clearly outlined operation, maintenance, servicing and calibration of the Spra-Coupe. The operator's manual was prepared only in US units. It is recommended that the manual be prepared in Imperial and SI (metric) units.

Durability Results

Table 4 outlines the mechanical history of the Spra-Coupe during the 73 hours of field operation while spraying about 1629 ha (4027 ac). The intent of the test was evaluation of functional performance. The following failures represent only those which occurred during the functional testing. An extended durability evaluation was not conducted. Consider each failure separately since some are not as serious as others.

Table 4. Mechanical History

Item	Hours	Hectares	(Acres)
PLUMBING ASSEMBLY			
- the spray pump wore out and was replaced at	5	113	(276)
- the spray pump drive belt broke and was replaced at	6, 71	134,1585	(331) (3917)
- the line strainer gasket expanded slightly and would not seat properly at	end of test	1629	(4027)
- some wear on the pump hoses was evident at	end of test	1629	(4027)
CHASSIS ASSEMBLY			
- the rubber dust seal on the brake cylinder had deteriorated at	51	1139	(2813)
- the left boom clamp was lost and replaced at	51	1139	(2813)
- the left cable hook was missing at	end of test	1629	(4027)
- the right cable hook was bent at	end of test	1629	(4027)
- the right rear motor mount bolt was missing at	end of test	1629	(4027)

Discussion of Mechanical Problems

PLUMBING ASSEMBLY

Pump: The pump was ruined near the beginning of the test. Severe wear was evident on the rollers and pump housing (Figure 17). The wear was attributed to operation of the pump when dry. The pump was replaced and no further problems were encountered.

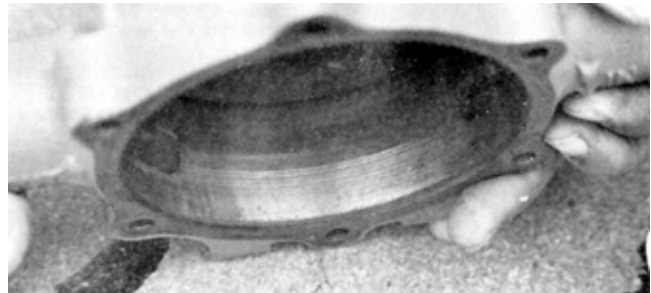
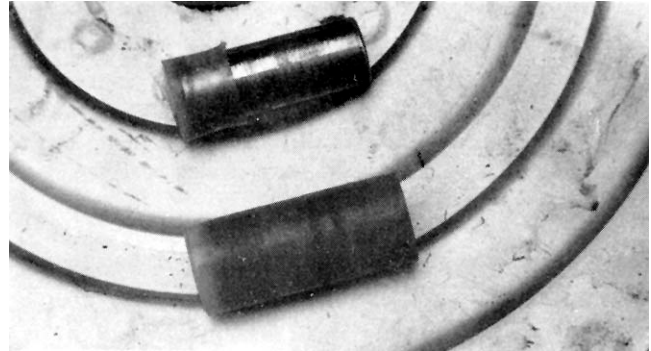


Figure 17. Worn Pump.

Pump Drive Belt: The drive belt on the pump broke twice during the test. This was caused by the belt wearing on the engine drive pulley while the pump was disengaged. Modifications are required to eliminate belt wear when the pump is disengaged.

Hoses: The hoses were worn slightly due to rubbing against the motor shroud (Figure 18). The hoses could be re-routed to eliminate this problem.

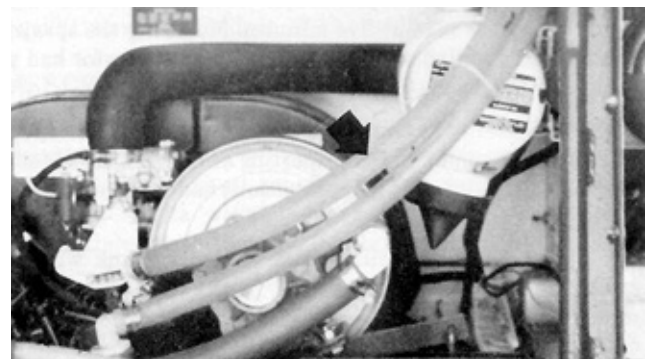


Figure 18. Worn Hoses.

CHASSIS ASSEMBLY

Cable Hooks: The cable hooks (Figure 19) were damaged because operators neglected to unhook the cable when unfolding the booms to field position.

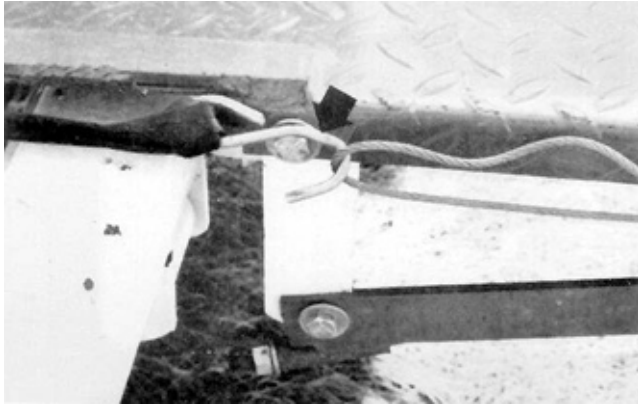


Figure 19. Cable Hooks.

APPENDIX I SPECIFICATIONS

Model: Melroe Spra-Coupe Model 103
Serial Number: M13 6774

	Field Position	Transport Position
Overall Width:	15,430 mm (50.6 ft)	2455 mm (8.1 ft)
Overall Length:	4750 mm (15.6 ft)	5160 mm (16.9 ft)
Overall Height:	1820 mm (6.0 ft)	1820 mm (6.0 ft)
Wheel Base:	3048 mm (10.0 ft)	
Wheel Tread:	2185 mm (7.2 ft)	
Tire Size: front - 1, 600 x 13, 2 ply, smooth		
rear - 2, GR 78 x 15, 4 ply, smooth		
Weights: (field position) including operator [95 kg (210 lb)] and full tank of fuel.		
	<u>Tank Empty</u>	<u>Tank Full</u>
front wheel	204 kg (450 lb)	240 kg (530 lb)
left wheel	435 kg (960 lb)	671 kg (1480 lb)
right rear wheel	<u>440 kg (970 lb)</u>	<u>680 kg (1500 lb)</u>
TOTAL	1079 kg (2380 lb)	1591 kg (3510 lb)

Spray System:

spray tank: material - polyethylene
capacity - 491 L (108 gal)

strainers: line strainer - 80 mesh
nozzle strainer - 80 mesh c/w check valves

pump: Hypro model C7560 nylon roller (1270 rpm at full throttle)

agitation: hydraulic

pressure gauge: Marshalltown (0 - 160 psi)

booms: 1/2 inch nylon hose

nozzles (I)elavan LF 77-730 brass): number - 21
spacing - 762 mm (30 in)

spraying width: 16,002 mm (52.5 ft)

boom adjustment: height - 914 mm (36 in) not adjustable
nozzle angle - 1800 (horizontal ahead to horizontal rearward)

Suspension: coil springs and shock absorber suspension

Engine:

make: Volkswagen industrial air cooled
serial number: 068164
type: 125 A, 4 cylinders horizontal opposed
bore: 853 mm (3.36 in)
stroke: 691 mm (2.72 in)
displacement: 1584 cc (96.66 cu in)
compression ratio: 7.5:1
output: 39.5 kW (53 hp) at 3 800 rpm
fuel: regular gasoline, 83-90 octane
fuel tank capacity: 39.8 L (8.75 gal)
engine oil capacity: 2.4 L (2.1 qt)
air cleaner: dry cartridge type with condition indicator
electrical system: 12 volt
lubrication: force fed by gear pump

Transmission:

type: heavy duty, synchromesh, 4 speeds forward plus reverse
transmission oil capacity: 2.5 L (2.2 qt)
final drive: 1:3 ratio, chain sprockets and roller chain running in oil
speed ranges: 8.0, 12.9, 22.5 and 32.2 km/h (5, 8, 14 and 20 mph)

Instruments: hour meter, electric fuel gauge, key ignition switch, generator, warning light, oil pressure warning light, liquid pressure gauge, light switch.

Lubrication Points:

final drive 6
tie rod 2
front wheel fork shaft 1
TOTAL 9

APPENDIX II

MACHINE RATINGS

The following rating scale is used in PAMI Evaluation Reports:

- | | |
|---------------|--------------------|
| (a) excellent | (d) fair |
| (b) very good | (e) poor |
| (c) good | (f) unsatisfactory |

APPENDIX III

METRIC CONVERSIONS

In keeping with the intent of the Canadian metric conversion program, this report has been prepared in SI units. For comparative purposes, the following conversions may be used:

1 hectare (ha)	= 2.47 acre (ac)
1 litre per hectare (L/ha)	= 0.09 Imperial gallon per acre (gal/ac)
1 kilopascal (kPa)	= 0.15 pound per square inch (psi)
1 kilometre per hour (km/h)	= 0.62 mile per hour (mph)
1 kilowatt (kW)	= 1.34 horsepower (hp)
1 litre per second (L/s)	= 13.20 Imperial gallons per minute (gal/min)
1 metre (m)	= 1000 millimetres (mm) = 39.37 inches (in)
1 litre (L)	= 0.22 Imperial gallon (gal)



3000 College Drive South
Lethbridge, Alberta, Canada T1K 1L6
Telephone: (403) 329-1212
FAX: (403) 329-5562
<http://www.agric.gov.ab.ca/navigation/engineering/afmrc/index.html>

Prairie Agricultural Machinery Institute

Head Office: P.O. Box 1900, Humboldt, Saskatchewan, Canada S0K 2A0
Telephone: (306) 682-2555

Test Stations:

P.O. Box 1060

Portage la Prairie, Manitoba, Canada R1N 3C5

Telephone: (204) 239-5445

Fax: (204) 239-7124

P.O. Box 1150

Humboldt, Saskatchewan, Canada S0K 2A0

Telephone: (306) 682-5033

Fax: (306) 682-5080