

3) Bedrock Aquifers

a) General

- Apparent Yield for Water Wells Completed in Upper Bedrock Aquifer(s)
- Total Dissolved Solids in Groundwater from Upper Bedrock Aquifer(s)
- Sulfate in Groundwater from Upper Bedrock Aquifer(s)
- Distance from Top of Lacombe Member vs Sulfate in Groundwater from Upper Bedrock Aquifer(s)
- Chloride in Groundwater from Upper Bedrock Aquifer(s)
- Fluoride in Groundwater from Upper Bedrock Aquifer(s)
- Total Hardness of Groundwater from Upper Bedrock Aquifer(s)
- Piper Diagram - Bedrock Aquifer(s)
- Recharge/Discharge Areas between Surficial Deposits and Upper Bedrock Aquifer(s)
- Non-Pumping Water-Level Surface in Upper Bedrock Aquifer(s)
- Changes in Water Levels in Upper Bedrock Aquifer(s)

b) Disturbed Belt

- Depth to Top of Disturbed Belt
- Structure-Contour Map - Disturbed Belt
- Non-Pumping Water-Level Surface - Disturbed Belt Aquifer
- Apparent Yield for Water Wells Completed through Disturbed Belt Aquifer
- Total Dissolved Solids in Groundwater from Disturbed Belt Aquifer
- Sulfate in Groundwater from Disturbed Belt Aquifer
- Chloride in Groundwater from Disturbed Belt Aquifer
- Piper Diagram - Disturbed Belt Aquifer
- Changes in Water Levels - Disturbed Belt Aquifer

c) Dalehurst Member

- Depth to Top of Dalehurst Member
- Structure-Contour Map - Dalehurst Member
- Non-Pumping Water-Level Surface - Dalehurst Aquifer
- Apparent Yield for Water Wells Completed through Dalehurst Aquifer
- Total Dissolved Solids in Groundwater from Dalehurst Aquifer
- Sulfate in Groundwater from Dalehurst Aquifer
- Chloride in Groundwater from Dalehurst Aquifer
- Piper Diagram - Dalehurst Aquifer
- Changes in Water Levels - Dalehurst Aquifer

d) Lacombe Member

- Depth to Top of Lacombe Member
- Structure-Contour Map - Lacombe Member
- Non-Pumping Water-Level Surface - Lacombe Aquifer
- Apparent Yield for Water Wells Completed through Lacombe Aquifer
- Total Dissolved Solids in Groundwater from Lacombe Aquifer
- Sulfate in Groundwater from Lacombe Aquifer
- Chloride in Groundwater from Lacombe Aquifer
- Piper Diagram - Lacombe Aquifer
- Changes in Water Levels - Lacombe Aquifer

e) Haynes Member

- Depth to Top of Haynes Member
- Structure-Contour Map - Haynes Member
- Non-Pumping Water-Level Surface - Haynes Aquifer
- Apparent Yield for Water Wells Completed through Haynes Aquifer
- Total Dissolved Solids in Groundwater from Haynes Aquifer
- Sulfate in Groundwater from Haynes Aquifer
- Chloride in Groundwater from Haynes Aquifer
- Piper Diagram - Haynes Aquifer
- Changes in Water Levels - Haynes Aquifer

f) Upper Scollard Formation

- Depth to Top of Upper Scollard Formation
- Structure-Contour Map - Upper Scollard Formation
- Non-Pumping Water-Level Surface - Upper Scollard Aquifer
- Apparent Yield for Water Wells Completed through Upper Scollard Aquifer
- Total Dissolved Solids in Groundwater from Upper Scollard Aquifer
- Sulfate in Groundwater from Upper Scollard Aquifer
- Chloride in Groundwater from Upper Scollard Aquifer
- Piper Diagram - Upper Scollard Aquifer

g) Lower Scollard Formation

- Depth to Top of Lower Scollard Formation
- Structure-Contour Map - Lower Scollard Formation

4) Hydrographs and Observation Water Wells

- Hydrographs

5) Specific Study Areas

- Specific Study Areas
- Bedrock Geology of Specific Study Areas
- Apparent Yield for Water Wells Completed in Sand and Gravel Aquifer(s) - Specific Study Areas
- Apparent Yield for Water Wells Completed in Upper Bedrock Aquifer(s) - Specific Study Areas
- Area Northeast of Calgary - Location of Gas Wells
- Area Northeast of Calgary - Apparent Yield in Upper Bedrock Aquifer(s)
- Area East and North of Chestermere Lake - Apparent Yield in Sand and Gravel Aquifer(s)
- Area East and North of Chestermere Lake - Apparent Yield in Upper Bedrock Aquifer(s)
- Area North of Tsuu t'ina First Nation and South of the Elbow River - Apparent Yield in Sand and Gravel Aquifer(s)
- Area North of Tsuu t'ina First Nation and South of the Elbow River - Apparent Yield in Upper Bedrock Aquifer(s)
- Area North of Cochrane - Apparent Yield in Sand and Gravel Aquifer(s)
- Area North of Cochrane - Apparent Yield in Upper Bedrock Aquifer(s)
- Shepard Area - Fluoride in Upper Bedrock Aquifer(s)
- Shepard Area - Total Hardness vs. Fluoride in Upper Bedrock Aquifer(s)

M.D. OF ROCKY VIEW NO. 44

Appendix C

General Water Well Information

Domestic Water Well Testing.....	2
Purpose and Requirements	2
Procedure.....	3
Site Diagrams	3
Surface Details	3
Groundwater Discharge Point	3
Water-Level Measurements	3
Discharge Measurements.....	3
Water Samples	3
Water Act - Water (Ministerial) Regulation	4
Water Act – Flowchart.....	5
Chemical Analysis of Farm Water Supplies.....	6
Additional Information	10

Domestic Water Well Testing

Purpose and Requirements

The purpose of the testing of domestic water wells is to obtain background data related to:

- 1) the non-pumping water level for the aquifer - Has there been any lowering of the level since the last measurement?
- 2) the specific capacity of the water well, which indicates the type of contact the water well has with the aquifer;
- 3) the transmissivity of the aquifer and hence an estimate of the projected long-term yield for the water well;
- 4) the chemical, bacteriological and physical quality of the groundwater from the water well.

The testing procedure involves conducting an aquifer test and collecting of groundwater samples for analysis by an accredited laboratory. The date and time of the testing are to be recorded on all data collection sheets. A sketch showing the location of the water well relative to surrounding features is required. The sketch should answer the question, "If this water well is tested in the future, how will the person doing the testing know this is the water well I tested?"

The water well should be taken out of service as long as possible before the start of the aquifer test, preferably not less than 30 minutes before the start of pumping. The non-pumping water level is to be measured 30, 10, and 5 minutes before the start of pumping and immediately before the start of pumping which is to be designated as time 0 for the test. All water levels must be from the same designated reference, usually the top of the casing. Water levels are to be measured during the pumping interval and during the recovery interval after the pump has been turned off; all water measurements are to be with an accuracy of ± 0.01 metres.

During the pumping and recovery intervals, the water level is to be measured at the appropriate times. An example of the time schedule for a four-hour test is as follows, measured in minutes after the pump is turned on and again after the pump is turned off:

1,2,3,4,6,8,10,13,16,20,25,32,40,50,64,80,100,120.

For a four-hour test, the reading after 120 minutes of pumping will be the same as the 0 minutes of recovery. Under no circumstance will the recovery interval be less than the pumping interval.

Flow rate during the aquifer test should be measured and recorded with the maximum accuracy possible. Ideally, a water meter with an accuracy of better than $\pm 1\%$ displaying instantaneous and total flow should be used. If a water meter is not available, then the time required to completely fill a container of known volume should be recorded, noting the time to the nearest 0.5 seconds or better. Flow rate should be determined and recorded often to ensure a constant pumping rate.

Groundwater samples should be collected as soon as possible after the start of pumping and within 10 minutes of the end of pumping. Initially only the groundwater samples collected near the end of the pumping interval need to be submitted to the accredited laboratory for analysis. All samples must be properly stored for transportation to the laboratory and, in the case of the bacteriological analysis, there is a maximum time allowed between the time the sample is collected and the time the sample is delivered to the laboratory. The first samples collected are only analyzed if there is a problem or a concern with the first samples submitted to the laboratory.

Procedure

Site Diagrams

These diagrams are a map showing the distance to nearby significant features. This would include things like a corner of a building (house, barn, garage etc.) or the distance to the half-mile or mile fence. The description should allow anyone not familiar with the site to be able to unequivocally identify the water well that was tested. In lieu of a map, UTM coordinates accurate to within five metres would be acceptable. If a hand-held GPS is used, the post-processing correction details must be provided.

Surface Details

The type of surface completion must be noted. This will include such things as a pitless adapter, well pit, pump house, in basement, etc. Also, the reference point used for measuring water levels needs to be noted. This would include top of casing (TOC) XX metres above ground level; well pit lid, XX metres above TOC; TOC in well pit XX metres below ground level.

Groundwater Discharge Point

Where was the flow of groundwater discharge regulated? For example was the discharge through a hydrant downstream from the pressure tank; discharged directly to ground either by connecting directly above the well seal or by pulling the pump up out of the pitless adapter; from a tap on the house downstream from the pressure tank? Also note must be made if any action was taken to ensure the pump would operate continuously during the pumping interval and whether the groundwater was passing through any water-treatment equipment before the discharge point.

Water-Level Measurements

How were the water-level measurements obtained? If obtained using a contact gauge, what type of cable was on the tape, graduated tape or a tape with tags? If a tape with tags, when was the last time the tags were calibrated? If a graduated tape, what is the serial number of the tape and is the tape shorter than its original length (i.e. is any tape missing)?

If water levels are obtained using a transducer and data logger, the serial numbers of both transducer and data logger are needed and a copy of the calibration sheet. The additional information required is the depth the transducer was set and the length of time between when the transducer was installed and when the calibration water level was measured, plus the length of time between the installation of the transducer and the start of the aquifer test. All water levels must be measured at least to the nearest 0.01 metres.


Discharge Measurements

Type of water meter used. This could include such things as a turbine or positive displacement meter. How were the readings obtained from the meter? Were the readings visually noted and recorded or were they recorded using a data logger?

Water Samples

A water sample must be collected between the 4- and 6-minute water-level measurements, whenever there is an observed physical change in the groundwater being pumped, and 10 minutes before the end of the planned pumping interval. Additional water samples must be collected if it is expected that pumping will be terminated before the planned pumping interval.

Water Act - Water (Ministerial) Regulation

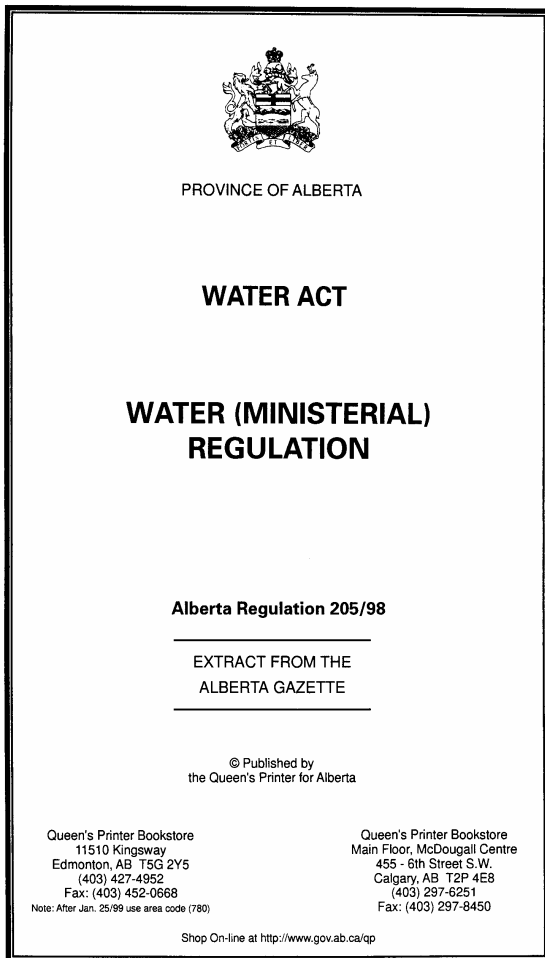

ALBERTA REGULATION 205/98

Water Act

WATER (MINISTERIAL) REGULATION

Table of Contents

Interpretation	1
Part 1 Activities	
Approval exemption	2
Approval exemptions subject to Code	3
Notice of section 3 activities	4
Part 2 Diversions and Transfers	
Licence exemption	5
Temporary diversions subject to Code	6
Section 6 temporary diversion notices	7
Diversion for household purposes prohibited	8
Subdivisions requiring reports	9
Major river basin boundaries	10
Licence purposes	11
Licence expiry dates	12
Part 3 Notice	
Notice of application, decision or order	13
Exemptions from notice requirements	14
Part 4 Access to Information	
Disclosure of information	15
Provision of information	16
Extension of time	17
Part 5 Land Compensation Board Procedures	
Appeals	18
Notice of appeal	19
Pre-hearing matters	20
Conduct of a hearing and decision	21
Combining hearings	22
Costs	23
Fees	24
Extension of time	25