

6.2.2.1 Surficial Deposits/Bedrock Aquifers

The hydraulic gradient between the surficial deposits and the bedrock aquifers has been determined by subtracting the non-pumping water-level surface, determined for all water wells in the surficial deposits, from the non-pumping water-level surface associated with all water wells completed in bedrock aquifers. The recharge classification on the adjacent map includes those areas where the water level in the surficial deposits is more than five metres above the water level in the upper bedrock aquifer(s). The discharge areas are where the water level in the surficial deposits is more than five metres lower than the water level in the bedrock. When the water level in the surficial deposits is between five metres above and five metres below the water level in the bedrock, the area is classified as a transition.

The adjacent map shows that in more than 50% of the County there is a downward hydraulic gradient between the surficial deposits and the upper bedrock aquifer(s). Areas where there is an upward hydraulic gradient, discharge from the bedrock, are very few. The areas of discharge from the bedrock are mainly along the Red Deer River Valley and in the southwestern part of the County, south of the subcrop of the Scollard Formation. The remaining parts of the County are areas where there is a transition condition. The extensive areas of transition conditions may be a result of limited topographic relief and/or limited data for both aquifer conditions.

Because of the paucity of data, a calculation of the volumes of groundwater entering and leaving the surficial deposits has not been attempted.

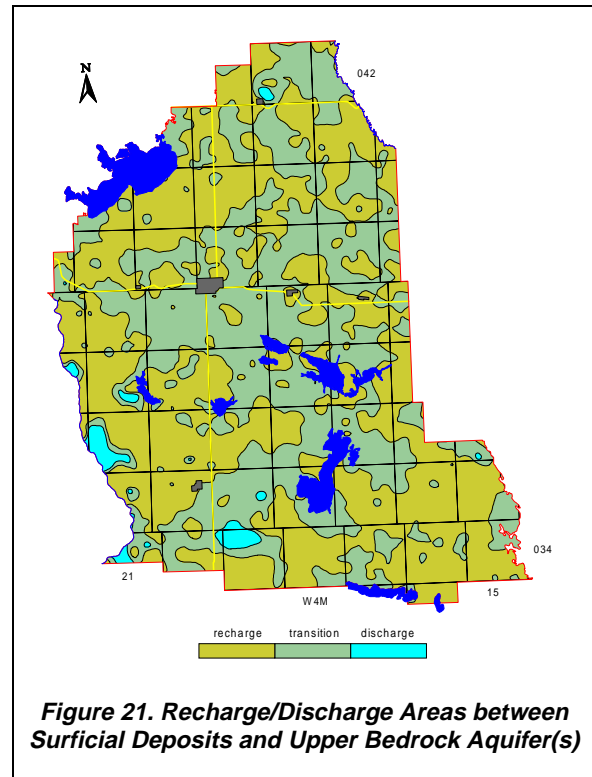


Figure 21. Recharge/Discharge Areas between Surficial Deposits and Upper Bedrock Aquifer(s)

6.3 Bedrock Aquifers


Recharge to the bedrock aquifers within the County takes place from the overlying surficial deposits and from flow in the aquifer from outside the County. The recharge/discharge maps show that generally for most of the County, there is a downward hydraulic gradient from the surficial deposits to the bedrock. On a regional basis, calculating the quantity of water involved is not possible because of the complexity of the geological setting and the limited amount of data. However, because of the generally low permeability of the upper bedrock materials, the volume of water is expected to be small.

The hydraulic relationship between the surficial deposits and the Scollard Aquifer indicates that in 90% of the County where the Scollard is present, there is a downward hydraulic gradient. Discharge areas are present at the edges of the Scollard Formation.

The recharge/discharge configuration for the Upper Horseshoe Canyon Formation and the surficial deposits shows discharge from the bedrock in the eastern and the southern parts of the County. The discharge in the eastern parts of the County is associated with the edge of the Aquifer. The high TDS concentrations in the surficial deposits and upper bedrock aquifer(s) in Tps 036 to 039, ranges 16 and 17, W4M, correlates with an area of discharge between the surficial deposits and the Upper Horseshoe Canyon Aquifer. The extensive area of transitional flow may be indicative of the low relief, limited data and the broad range used for the definition of transitional flow.

It would be expected that there would be discharge from the Upper Horseshoe Canyon Formation along the Red Deer River Valley, but there are no data to confirm this. Discharge from the bedrock would also be expected in areas of linear bedrock lows. Again, the limited data do not show this to be happening.

The available data indicate that there is an upward hydraulic gradient from the Lower Horseshoe Canyon Aquifer to the Upper Horseshoe Canyon Aquifer in several areas in the County. The areas tend to be concentrated in a five- to ten-kilometre-wide band extending from Buffalo Lake in the northwest to Gough Lake in the south-central part of the County.

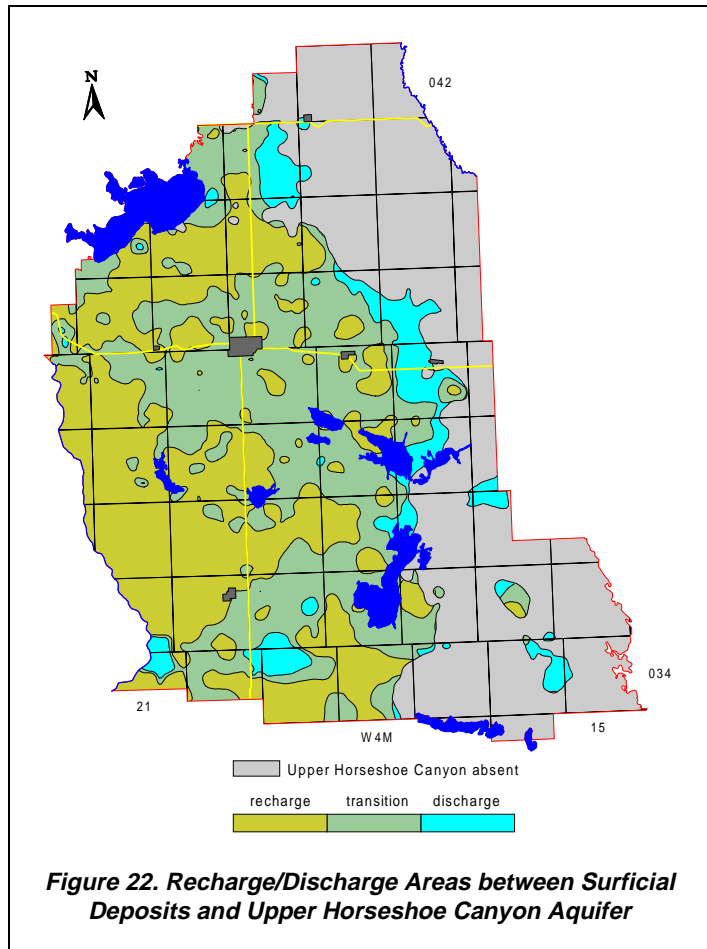

7 POTENTIAL FOR GROUNDWATER CONTAMINATION

The most common sources of contaminants that can impact groundwater originate on or near the ground surface. The contaminant sources can include leachate from landfills, effluent from leaking lagoons or from septic fields, and petroleum products from storage tanks or pipeline breaks. The agricultural activities that generate contaminants include spreading of fertilizers, pesticides, herbicides and manure. The spreading of highway salt can also degrade groundwater quality.

When activities occur that do or can produce a liquid which could contaminate groundwater, it is prudent (from a hydrogeological point of view) to locate the activities where the risk of groundwater contamination is minimal. Alternatively, if the activities must be located in an area where groundwater can be more easily contaminated, the necessary action must be taken to minimize the risk of groundwater contamination.

The potential for groundwater contamination is based on the concept that the easier it is for a liquid contaminant to move downward, the easier it is for the groundwater to become contaminated. In areas where there is groundwater discharge, liquid contaminants cannot enter the groundwater flow systems to be distributed throughout the area. When there are groundwater recharge areas, low-permeability materials impede the movement of liquid contaminants downward. Therefore, if the soils develop on a low-permeability parent material of till or clay, the downward migration of a contaminant is slower relative to a high-permeability parent material such as sand and gravel of fluvial origin. Once a liquid contaminant enters the subsurface, the possibility for groundwater contamination increases if it coincides with a higher permeability material within one metre of the land surface.

To determine the nature of the materials on the land surface, the surficial geology map prepared by the Alberta Research Council (Shetsen, 1990) has been reclassified based on the relative permeability. The classification of materials is as follows:

1. high permeability - sand and gravel;
2. moderate permeability - silt, sand with clay, gravel with clay, and bedrock; and
3. low permeability - clay and till.

To identify the areas where sand and gravel can be expected within one metre of the ground surface, all groundwater database records with lithologies were reviewed. From a total of 2,999 records in the area of the County with lithology descriptions, 721 have sand and gravel within one metre of ground level. In the remaining 2,278 records, the first sand and gravel is deeper or not present. This information was gridded to prepare a distribution of where the first sand and gravel deposit could be expected within one metre of ground level.


7.1.1 Risk of Contamination Map

The information from the reclassification of the surficial geology map is the basis for preparing the initial risk map. The depth to the first sand and gravel is then used to modify the initial map and to prepare the final map. The criteria used for preparing the final Risk of Groundwater Contamination map are outlined in the adjacent table.

Surface Permeability	Sand or Gravel Present To Within One Metre Of Ground Surface	Groundwater Contamination Risk
Low	No	Low
Moderate	No	Moderate
High	No	High
Low	Yes	High
Moderate	Yes	High
High	Yes	Very High

Table 3. Risk of Groundwater Contamination Criteria

The Risk of Groundwater Contamination map shows that, in less than 35% of the County, there is a high or very high risk of the groundwater being contaminated. These areas would be considered the least desirable ones for a development that has a product or by-product that could cause groundwater contamination. However, because the map has been prepared as part of a regional study, the designations are a guide only; detailed hydrogeological studies must be completed at any proposed development site to ensure the groundwater is protected from possible contamination. At all locations, good environmental practices should be exercised in order to ensure that groundwater contamination would not affect groundwater quality.

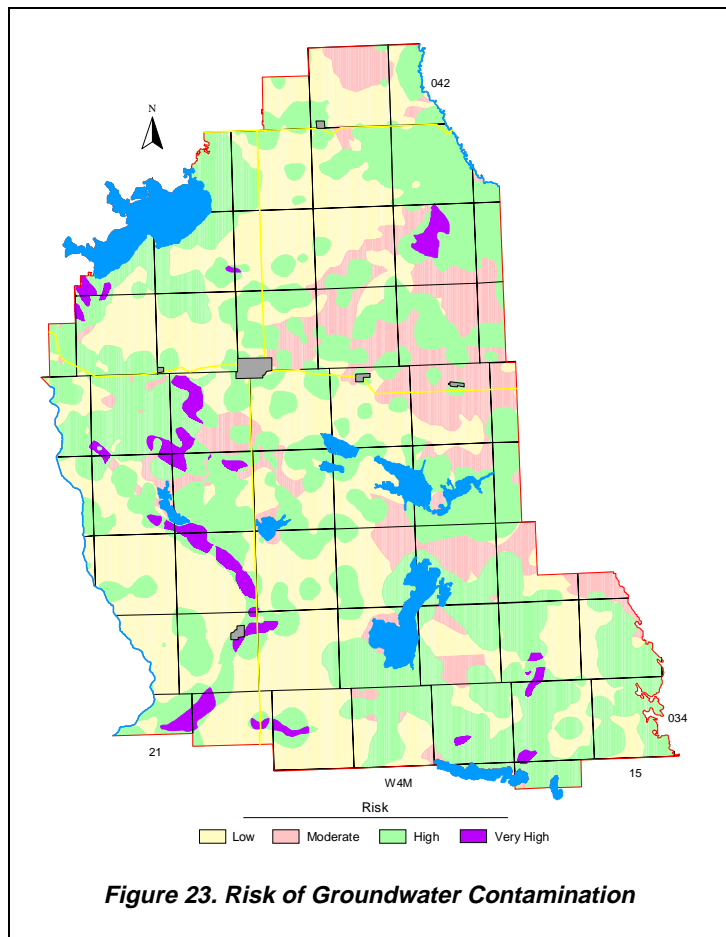

8 RECOMMENDATIONS

The present study has been based on information available from the groundwater database. The database has three problems:

- 1) the quality of the data;
- 2) the coordinate system used for the horizontal control; and
- 3) the distribution of the data.

The quality of the data in the groundwater database is affected by two factors: a) the technical training of the persons collecting the data; and b) the quality control of the data. The possible options to upgrade the database include the creation of a "super" database, which includes only verified data. The level of verification would have to include identifying the water well in the field, obtaining meaningful horizontal coordinates for the water well and the verification of certain parameters such as water level and completed depth. An attempt to update the quality of the entire database is not recommended.

The results of the present study indicate that the only readily identifiable aquifers in the surficial deposits are the sand and gravel deposits associated with the Erskine Channel and the Buried Buffalo Lake Valley. In the bedrock, there are indications that in the lower 70 metres of the Lower Horseshoe Canyon Formation a useable aquifer may be present

In the western part of the County, the base of the Lower Horseshoe Canyon Formation can be at depths approaching 400 metres. Because of the depth, no water wells have been completed through the Aquifer. Therefore, it is recommended that a test-drilling program be completed to evaluate the Lower Horseshoe Canyon Aquifer in the County of Stettler. The program could involve the drilling of water test holes in areas where only limited groundwater supplies are available from shallower aquifers; one such area could be in the western part of the County where less than 10 m³/day of groundwater is available from the Upper Horseshoe Canyon Aquifer. The purpose of the program would be to determine the parameters of the Aquifer at depth and the quality of the groundwater from the Aquifer. This Aquifer would represent the maximum depth that can be considered for the development of groundwater supplies for traditional agricultural purposes.

Another area where insufficient data are available is for the determination of a groundwater budget. There are only three observation water-well data sources in the County from which to obtain water levels for the groundwater budget. One method to obtain additional water-level data is to solicit the assistance of the water well owners who are stakeholders in the groundwater resource. In the M.D. of Rocky View, water well owners are being provided with a tax credit if they accurately measure the water level in their water well once per week for a year. A pilot project indicated that approximately five years of records are required to obtain a reasonable data set. The cost of a five-year project involving 50 water wells would be less than the cost of one drilling program that may provide two or three observation water wells.

In general, for the next level of study, the database needs updating. It requires more information from existing water wells, and additional information from new ones.

Before an attempt is made to upgrade the level of interpretation provided in this report and the accompanying maps and groundwater query, it is recommended that all water wells for which water well drilling reports are available be subjected to the following actions:

1. The horizontal location of the water well should be determined within 10 metres. The coordinates must be in 10TM NAD 27 or some other system that will allow conversion to 10TM NAD 27 coordinates.
2. A four-hour aquifer test (two hours of pumping and two hours of recovery) should be performed with the water well to obtain a realistic estimate for the transmissivity of the aquifer in which the water well is completed.
3. Water samples should be collected for chemical analysis after 5 and 115 minutes of pumping, and analyzed for major and minor ions.

In addition to the data collection associated with the existing water wells, all available geophysical logs should be interpreted to establish a more accurate spatial definition of individual aquifers.

There is also a need to provide the water well drillers with feedback on the reports they are submitting to the regulatory agencies. The feedback is necessary to allow for a greater degree of uniformity in the reporting process. This is particularly true when trying to identify the bedrock surface. The water well drilling reports should be submitted to the AEP Resource Data Division in an electronic form. The money presently being spent by AEP and Prairie Farm Rehabilitation Administration (PFRA) to transpose the paper form to the electronic form should be used to allow for a technical review of the data and follow-up discussions with the drillers.

An effort should be made to form a partnership with the petroleum industry. The industry spends millions of dollars each year collecting information relative to water wells. Proper coordination of this effort could provide significantly better information from which future regional interpretations could be made. This could be accomplished by the County taking an active role in the activities associated with the construction of lease sites for the drilling of hydrocarbon wells and conducting of seismic programs.

Groundwater is a renewable resource and it must be managed.

9 REFERENCES

- Alberta Environmental Protection. 1980. Stettler Aquifer Study. Unpublished Report prepared by Environmental Protection Services.
- Andriashek, L. D. 1985. Quaternary Stratigraphy Sand River Area, Alberta. NTS 73L.
- Carrigy, M. A. 1971. Lithostratigraphy of the Uppermost Cretaceous (Lance) and Paleocene Strata of the Alberta Plains. Research Council of Alberta. Bulletin 27.
- Catuneanu, Octavian, Andrew D. Miall and Arthur R. Sweet. 1997. Reciprocal Architecture of Bearpaw T-R Sequences, Uppermost Cretaceous, Western Canada Sedimentary Basin. Bulletin of Canadian Petroleum Geology. Vol. 45, No. 1 (March, 1997), P. 75-94.
- Hydrogeological Consultants Ltd. 1996. Richard Pochylko. Erskine Area. SE 18-038-21 W4M. Groundwater Prognosis. Unpublished Contract Report.
- Hydrogeological Consultants Ltd. 1997. Aquifer Test Interpretation. Buffalo Lake Area. SW 18-041-20 W4M. Proposed Development – Braseth Beach. Unpublished Contract Report.
- Le Breton, E. Gordon. 1971. Hydrogeology of the Red Deer Area, Alberta. Research Council of Alberta. Report 71-1.
- Mossop, G. and I. Shetsen (co-compilers). 1994. Geological Atlas of the Western Canada Sedimentary Basin. Produced jointly by the Canadian Society of Petroleum Geology, Alberta Research Council, Alberta Energy, and the Geological Survey of Canada.
- Ozoray, G., M. Dubord and A. Cowen. 1990. Groundwater Resources of the Vermilion 73E Map Area, Alberta. Alberta Environmental Protection.
- Pettijohn, F. J. 1957. Sedimentary Rocks. Harper and Brothers Publishing.
- Shetsen, I. 1990. Quaternary Geology, Central Alberta. Produced by the Natural Resources Division of the Alberta Research Council.
- Strong, W.L. and K. R. Legatt, 1981. Ecoregions of Alberta. Alta. En. Nat. Resour., Resour. Eval. Plan Div., Edmonton as cited in Mitchell, Patricia and Ellie Prepas (eds.). 1990. Atlas of Alberta Lakes. The University of Alberta Press. Page 12.
- Thornthwaite, C. W. and J. R. Mather. 1957. Instructions and Tables for Computing Potential Evapotranspiration and the Water Balance. Drexel Institute of Technology. Laboratory of Climatology. Publications in Climatology. Vol. 10, No. 3, P. 181-289.