


Water wells not used for domestic needs must be licensed. At the end of 1996, 84 groundwater diversions were licensed in the County. The total maximum authorized diversion from these 84 water wells is 571 cubic metres per day (m^3/day); 71 percent of the authorized groundwater diversion is allotted for agricultural use. The largest licensed groundwater diversion within the County is 54.1 m^3/day for Alberta Mineral Extraction Inc.; their water well is completed in a sand and gravel aquifer associated with the Buried Egremont Valley.

At many locations within the County, more than one water well is completed at one legal location. Digitally processing this information is difficult. To obtain a better understanding of the completed depths of water wells, a surface was prepared representing the minimum depth for water wells and a second surface was prepared for the maximum depth. Both of these surfaces are used in the groundwater query on the CD-ROM. When the maximum and minimum water wells depths are similar, the impression is that there is only one aquifer that is being used. Over approximately 50% of the County, the difference between the maximum and minimum depth is less than 5 metres. The area where the greatest differences between the minimum and maximum depth occur most often is the north-central part of the County and in areas where water wells completed in aquifers in the surficial deposits are most common.

The total dissolved solids in the groundwater in the County are generally less than 2,000 milligrams per litre (mg/L). Groundwaters from the surficial deposits can be expected to be chemically hard with a high dissolved iron content. Groundwaters from the bedrock aquifers frequently are chemically soft with generally low concentrations of dissolved iron. The chemically soft groundwater is high in sodium concentration. Very few chemical analyses indicate a fluoride concentration above 1.0 mg/L.

Proper management of the groundwater resource requires water-level data. These data are often collected from observation water wells. At the present time, there are no data available from the one **Alberta Environmental Protection** (AEP)-operated observation water well within the County of Thorhild. Additional data can be obtained from some of the licensed groundwater diversions. In the past, these data have been difficult to obtain from AEP, in part because of the failure of the licensee to provide the data. **However, even with the available sources of data, the number of water-level data points relative to the size of the County is too few to provide a reliable groundwater budget. The most cost-efficient method to collect additional groundwater monitoring data would be to have the water well owners measuring the water level in their own water well on a regular basis.**

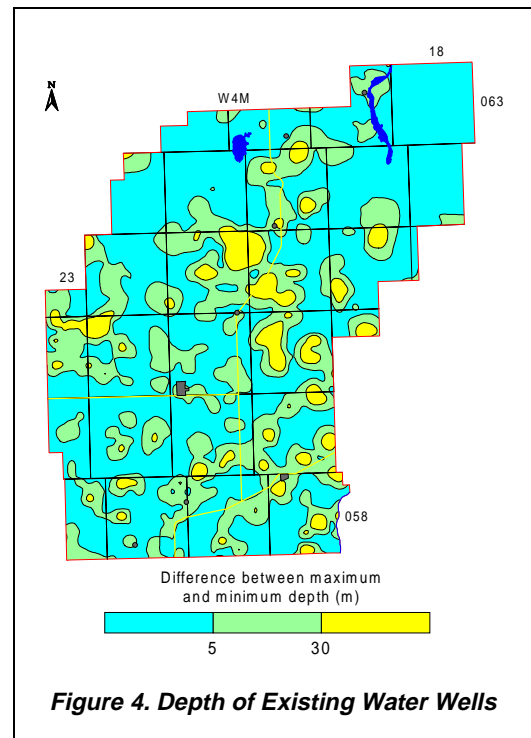

3 TERMS

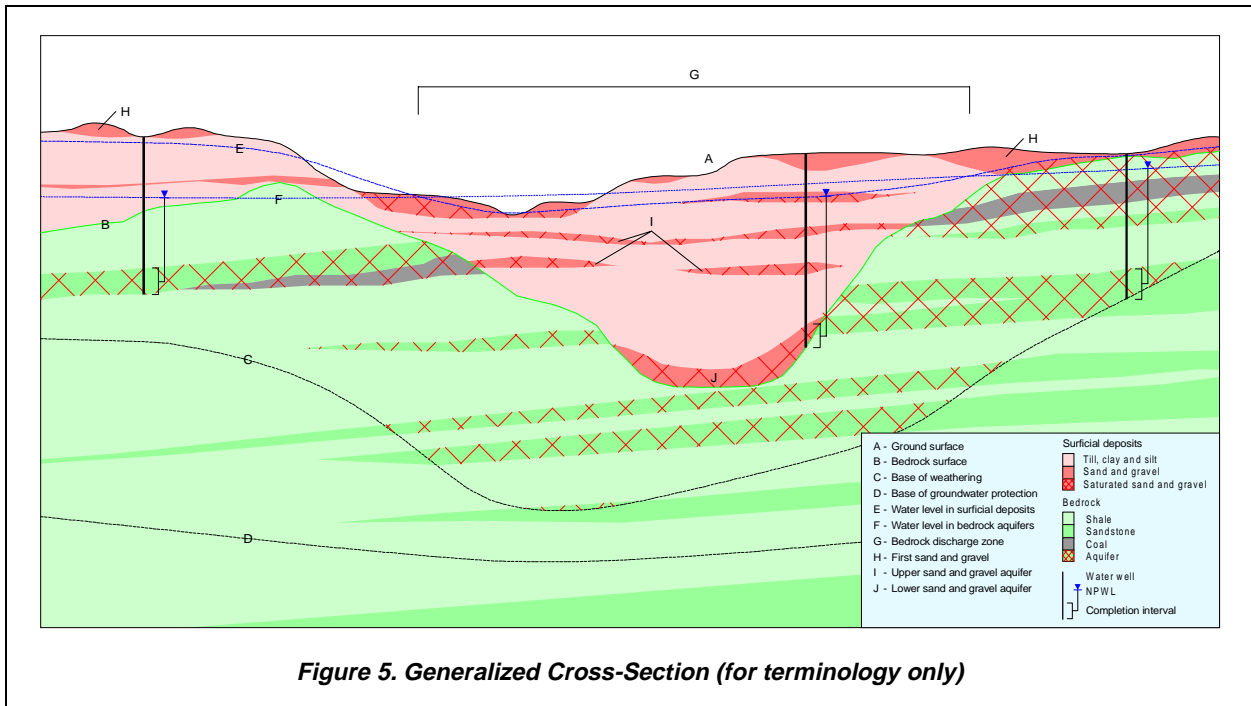


Figure 5. Generalized Cross-Section (for terminology only)

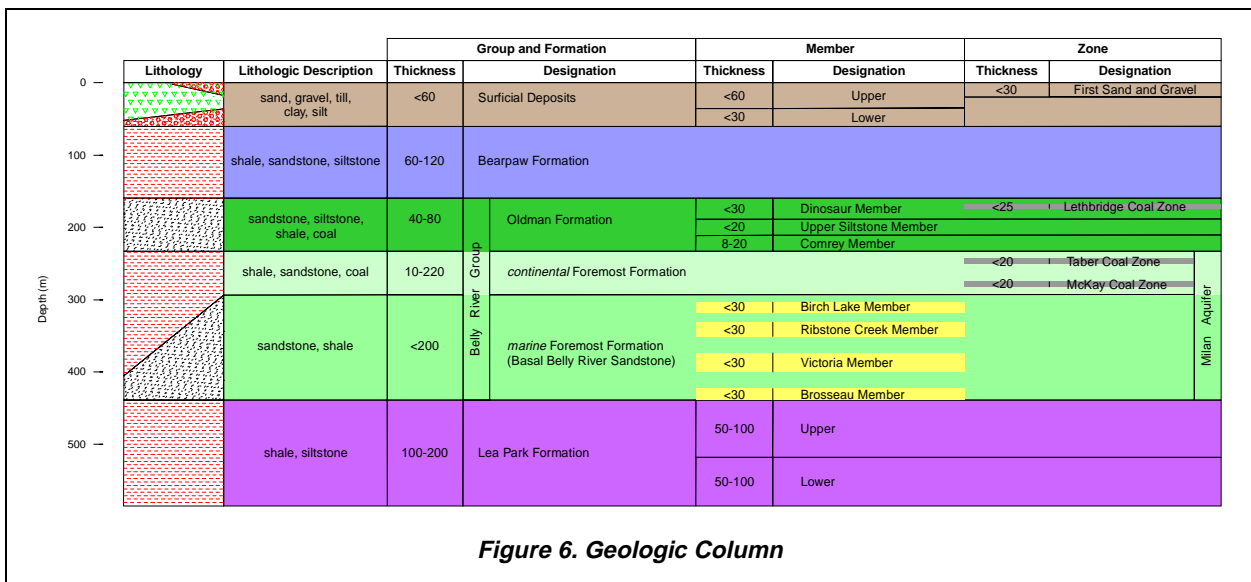


Figure 6. Geologic Column

4 METHODOLOGY

4.1 Data Collection and Synthesis

The AEP groundwater database is the main source of groundwater data available. The database includes the following:

- 1) water well drilling reports;
- 2) aquifer test results from some water wells;
- 3) location of some springs;
- 4) water well locations determined during water well surveys;
- 5) chemical analyses for some groundwaters;
- 6) location of flowing shot holes;
- 7) location of structure test holes; and
- 8) a variety of data related to the groundwater resource.

The main disadvantage to the database is the absence of quality control. Very little can be done to overcome this lack of quality control in the data collection, other than to assess the usefulness of control points relative to other data during the interpretation. Another disadvantage to the database is the lack of adequate spatial information.

The AEP groundwater database uses a land-based system with only a limited number of records having a value for ground elevation. The locations for records usually include a quarter section description; a few records also have a land description that includes a Legal Subdivision (Lsd). For digital processing, a record location requires a horizontal coordinate system. In the absence of an actual location for a record, the record is given the coordinates for the centre of the land description.

The present project uses the 10 TM coordinate system. This means that a record for the SE $\frac{1}{4}$ of section 06, township 060, range 21, W4M, would have a horizontal coordinate with an Easting 122,212 metres and a Northing 5,999,632 metres, the centre of the quarter section. Once the horizontal coordinates are determined, a ground elevation is obtained from the 1:20,000 Digital Elevation Model (DEM) from the Resource Data Division of AEP.

After assigning spatial control to the records in the groundwater database, the data are processed to determine values for hydrogeological parameters. As part of the processing, obvious keying errors in the database are corrected.

Where possible, determinations are made from individual records for the following:

- 1) depth to bedrock;
- 2) total thickness of sand and gravel;
- 3) thickness of first sand and gravel when present within one metre of ground surface;
- 4) total thickness of saturated sand and gravel; and
- 5) depth to the top and bottom of completion intervals.

Also, where sufficient information is available, values for apparent transmissivity³ and apparent yield⁴ are calculated, based on the aquifer test summary data supplied on the water well drilling reports. The apparent transmissivity results are then used to estimate a value for hydraulic conductivity⁵. The conductivity values are obtained by dividing the apparent transmissivity by the completion interval. To obtain a value for regional transmissivity of the aquifer, the hydraulic conductivity is multiplied by the effective thickness of the aquifer based on nearby e-log information. Where valid detailed aquifer test results exist, the interpreted data provide values for aquifer transmissivity and effective transmissivity.

The Alberta Energy and Utilities Board (EUB) well database includes records for all of the wells drilled by the oil and gas industry. The information from this source includes:

- 1) spatial control for each well site;
- 2) depth to the top of various geological units;
- 3) type and intervals for various down-hole geophysical logs; and
- 4) drill stem test (DST) summaries.

Unfortunately, the EUB database contains very little information from above the base of groundwater protection. Because the main interest for a groundwater study comes from data above the base of groundwater protection, the data from the EUB database have limited use.

Values for apparent transmissivity and hydraulic conductivity are calculated from the DST summaries.

Published and unpublished reports and maps provide the final source of information to be included in the new groundwater database. The reference section of this report lists the available reports. The only digital data from publications are from the Geological Atlas of the Western Canada Sedimentary Basin (Mossop and Shetsen, 1994). These data are used to verify the geological interpretation of geophysical logs but cannot be distributed because of a licensing agreement.

4.2 Spatial Distribution of Aquifers

Determination of the spatial distribution of the aquifers is based on:

- 1) lithologs provided by the water well drillers;
- 2) geophysical logs from structure test holes;
- 3) wells drilled by the oil and gas industry; and
- 4) data from existing cross-sections.

The identification of aquifers becomes a two-step process: first, mapping the tops and bottoms of individual geological units; and second, identifying the porous and permeable parts of each geological unit in which the aquifer is present.

After obtaining values for the elevation of the top and bottom of individual geological units at specific locations, the spatial distribution of the individual surfaces can be determined. Digitally, establishment of the distribution of a surface requires the preparation of a grid. The inconsistent quality of the data

³ For definitions of Transmissivity, see glossary

⁴ See glossary

⁵ See glossary

necessitates creating a representative sample set obtained from the entire data set. If the data set is large enough, it can be treated as a normal population and the removal of extreme values can be done statistically. When data sets are small, the process of data reduction involves a more direct assessment of the quality of individual points. Because of the uneven distribution of the data, all data sets are gridded using the Kriging method.

The final definition of the individual surfaces becomes an iterative process involving the plotting of the surfaces on cross-sections and the adjusting of control points to fit with the surrounding data.

The porous and permeable parts of the individual geological units have been mainly determined from geophysical logs.

4.3 Hydrogeological Parameters

Water well records that indicate the depths to the top and bottom of their completion interval are compared digitally to the spatial distribution of the various geological surfaces. This procedure allows for the determination of the aquifer in which individual water well is completed. When the completion interval of a water well cannot be established unequivocally, the data from that water well are not used in determining the distribution of hydraulic parameters.

After the water wells are assigned to a specific aquifer, the parameters from the water well records are assigned to the individual aquifers. The parameters include non-pumping (static) water level, transmissivity and projected water well yield. The total dissolved solids, chloride and sulfate concentrations from the chemical analysis of the groundwater are also assigned to applicable aquifers.

Once the values for the various parameters of the individual aquifers are established, the spatial distribution of the various parameters must be determined. The distribution of individual parameters involves the same process as the distribution of geological surfaces. This means establishing a representative data set and then preparing a grid.

4.3.1 Risk Criteria

The main source of groundwater contamination involves activities on or near the land surface. The risk is high when the near-surface materials are porous and permeable and low when the materials are less porous and less permeable. The two sources of data for the risk analysis include (a) a determination of when sand and gravel is or is not present within one metre of the ground surface, and (b) the surficial geology map. The presence or absence of sand and gravel within one metre of the land surface is based on a geological surface prepared from the data supplied on the water well drilling reports. The information available on the surficial geology map is categorized based on relative permeability. The information from these two sources is combined to form the risk assessment map. The criteria used in the classification of risk are given in the adjacent table.

| Surface Permeability | Sand or Gravel Present Top Within One Metre Of Ground Surface | Groundwater Contamination Risk |
|----------------------|---|--------------------------------|
| Low | No | Low |
| Moderate | No | Moderate |
| High | No | High |
| Low | Yes | High |
| Moderate | Yes | High |
| High | Yes | Very High |

Table 1. Risk of Groundwater Contamination Criteria

4.4 Maps and Cross-Sections

Once grids for geological surfaces have been prepared, various grids need to be combined to establish the extent and thickness of individual geological units. For example, the relationship between an upper bedrock unit and the bedrock surface must be determined. This process provides both the aquifer outline and the aquifer thickness. The aquifer thickness is used to determine the aquifer transmissivity by multiplying the hydraulic conductivity by the thickness.

Grids must also be combined to allow the calculation of projected long-term yields for individual water wells. The grids related to the elevation of the non-pumping water level and the elevation of the top of the aquifer are combined to determine the available drawdown. The available drawdown data and the transmissivity values are used to calculate values for projected long-term yields for individual water wells, completed in a specific aquifer, wherever the aquifer is present.

Once the appropriate grids are available, the maps are prepared by contouring the grids. The areal extent of individual parameters is outlined by masks to delineate individual aquifers. Appendix A includes page-size maps from the text, plus additional page-size maps and figures that support the discussion in the text. A list of maps and figures that are included on the CD-ROM is given in Appendix B.

Cross-sections are prepared by first choosing control points from the database along preferred lines of section. Data from these control points are then obtained from the database and placed in an AutoCAD drawing with an appropriate vertical exaggeration. The data placed in the AutoCAD drawing include the geo-referenced lithology, completion intervals and non-pumping water levels. Data from individual geological units are then transferred from the digitally prepared surfaces to the cross-section.

Once the technical details of the cross-section are correct, the drawing file is moved to the software package CoreIDRAW! for simplification and presentation in a hard-copy form. These cross-sections are presented in Appendix A, are included on the CD-ROM, and are in Appendix D in a page-size format.

4.5 Software

The files on the CD-ROM have been generated from the following software:

- Microsoft Professional Office 97
- Surfer 6.04
- ArcView 3.0a
- AutoCAD 14.01
- CoreIDRAW! 8.0
- Acrobat 3.0

5 AQUIFERS

5.1 Background

An aquifer is a porous and permeable rock that is saturated. If the non-pumping water level is above the top of the rock unit, this type of aquifer is an artesian aquifer. If the rock unit is not entirely saturated and the water level is below the top of the unit, this type of aquifer is a water-table aquifer. These types of aquifers occur in one of two general geological settings in the County. The first geological setting is the sediments that overlie the bedrock surface. In this report, these are referred to as the surficial deposits. The second geological setting includes aquifers in the upper bedrock. The geological settings, the nature of the deposits making up the aquifers within each setting, the nature of the water wells, and the general chemical quality of the groundwater associated with each setting are reviewed separately.

5.1.1 Surficial Aquifers

Surficial deposits in the County are mainly less than 40 metres thick, except in areas of linear bedrock lows where the thickness of surficial deposits can exceed 80 metres. The main aquifers in the surficial materials are sand and gravel deposits. In order for a sand and gravel deposit to be an aquifer, it must be saturated; if not saturated, a sand and gravel deposit is not an aquifer. The top of the surficial aquifers has been determined from the non-pumping water level in water wells less than 15 metres deep. The base of the surficial deposits is the bedrock surface.



For a water well with a small-diameter casing to be effective in surficial deposits and to provide sand-free groundwater, the water well must be completed with a water well screen. Many of the water wells completed in the surficial deposits are completed in low-permeability aquifers and have a large-diameter casing. The large-diameter water wells may have been hand dug or bored and because they are completed in very low permeability aquifers, most of these water wells would not benefit from water well screens. The groundwater from an aquifer in the surficial deposits usually has a chemical hardness of at least a few hundred mg/L and a dissolved iron concentration such that the groundwater must be treated before being used for domestic needs. Within the County, 46% of the water wells completed in the surficial deposits have a casing diameter of greater than 200 millimetres or no reported diameter for the surface casing, and are assumed to be dug or bored water wells.

5.1.2 Bedrock Aquifers

The upper bedrock includes rocks that are less than 200 metres below the bedrock surface. Some of this bedrock contains porous, permeable and saturated rocks that have a structure that is permeable enough for the rock to be an aquifer. Water wells completed in bedrock aquifers usually do not require water well screens and the groundwater is usually chemically soft. The data for 459 water wells indicate that the top of the water well completion interval is below the top of the bedrock surface, indicating that the water wells are completed in at least one bedrock aquifer. Of these 459 water wells in the database, 280 have values for surface casing diameter. Of the 280 water wells, 82% have casing diameters of less than 200 millimetres.

The upper bedrock includes the lowest part of the Bearpaw Formation, parts of the Belly River Group and some of the Lea Park Formation. The Bearpaw Formation is the uppermost bedrock along the west-central part of the County. The Belly River Group has a maximum thickness of 250 metres and includes the Oldman Formation and both the *continental* and *marine* facies⁶ of the Foremost Formation. The Oldman Formation is the upper bedrock and subcrops under the surficial deposits in the western two-thirds of the County. The *continental* Foremost Formation subcrops under the surficial deposits in the northeastern one-third of the County except where the *marine* Foremost Formation subcrops in the extreme northeastern part of the County. The Lea Park Formation underlies the Belly River Group and is a regional aquitard⁷.

The bedrock geology map also shows the Milan Aquifer subcropping in the northeastern part of the County.

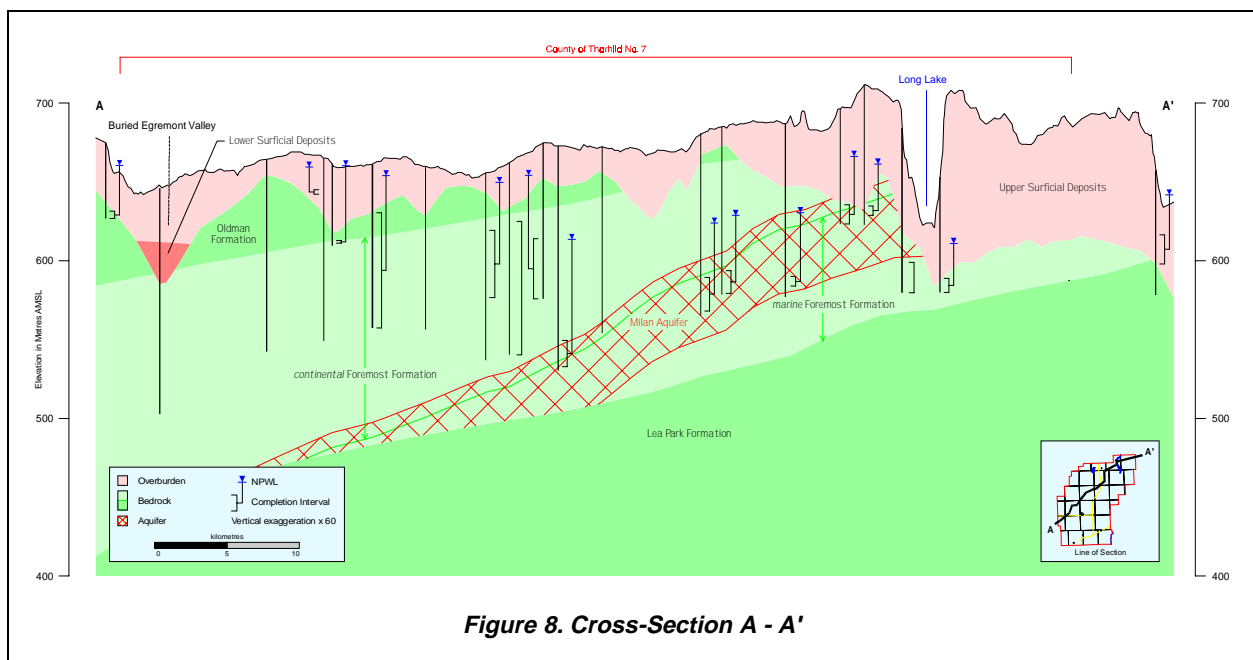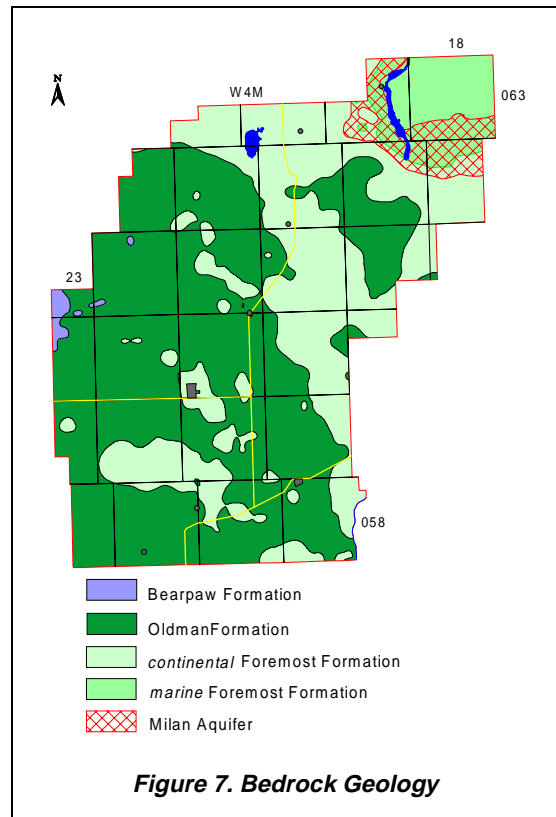

⁶ See glossary
⁷ See glossary