


### 3 TERMS

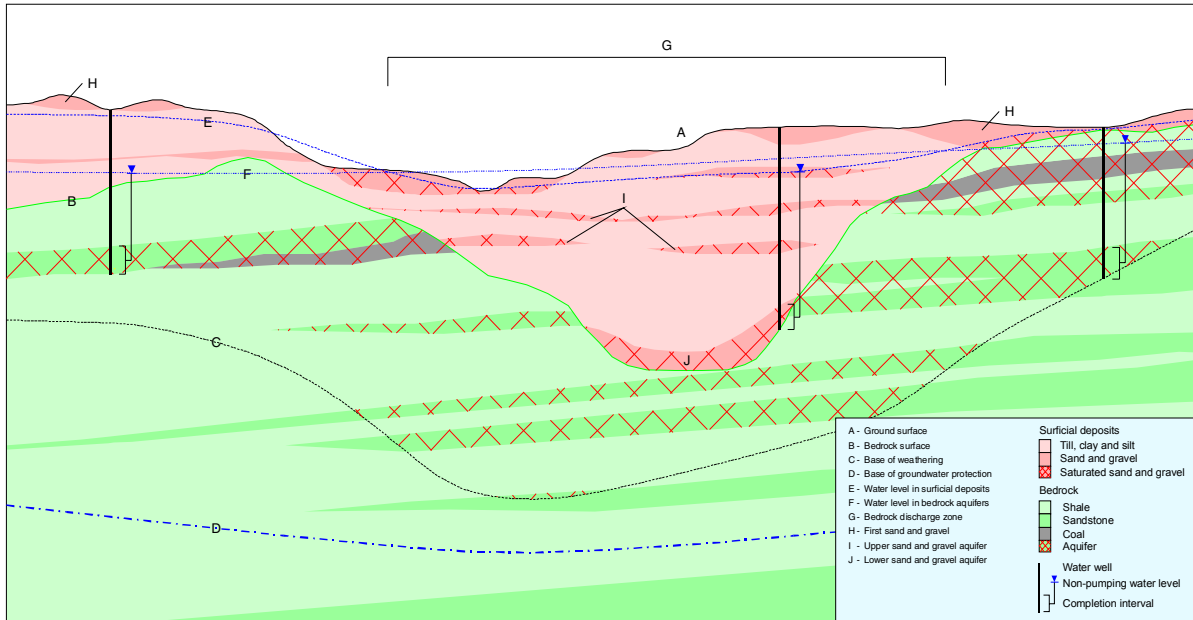

**Figure 5. Generalized Cross-Section (for terminology only)**  
 (for larger version, see page A-9)

Depth (m)	Lithology	Lithologic Description	Group and Formation		Member		Zone	
			Average Thickness (m)	Designation	Average Thickness (m)	Designation	Average Thickness (m)	Designation
0		sand, gravel, till, clay, silt	<20	Surficial Deposits	<15	Upper		
0-100					<20	Lower		
100-600		sandstone, shale, coal	<800	Paskapoo Formation	<300	Dalehurst Member		Obed-Marsh Coal Zone
300-400								Lower Dalehurst Coal Zone
400-500					100-300	Lacombe Member - Upper	Upper	Upper Sandstone
500-600					30-100	Lacombe Member - Lower	Lower	Middle Sandstone
600-700					20-100	Haynes		Lower Sandstone
600-700								Lower Lacombe Coal Zone
600-700		shale, sandstone, coal	60-150	Scollard Formation	40-100	Upper		<2 Upper Aralloy Coal Zone
700-750								-20 Aralloy Coal Zone (main seam)
700-750								<3.5 Main Coal Seam
700-750		shale, clay, tuff	~25	Battle Formation	<0.3	Kneehill Member		
750-800			5-10	Whitemud Formation				
800-900		shale, sandstone, coal, bentonite, limestone, ironstone	300-380	Horseshoe Canyon Formation	-100	Upper		
900-950					-100	Middle		
950-1000					-170	Lower		

**Figure 6. Geologic Column**  
 (for larger version, see page A-10)

## 4 METHODOLOGY

### 4.1 Data Collection and Synthesis

The AENV groundwater database is the main source of groundwater data. The database includes the following:

- 1) water well drilling reports
- 2) aquifer test results from some water wells
- 3) location of some springs
- 4) locations for some water wells determined during water well surveys
- 5) chemical analyses for some groundwaters<sup>12</sup>
- 6) location of some flowing shot holes
- 7) location of some structure test holes
- 8) a variety of data related to the groundwater resource.

The main disadvantage to the database is the reliability of the information entered into the database. Very little can be done to overcome this lack of quality control in the data collection, other than to assess the usefulness of control points relative to other data during the interpretation. Another disadvantage to the database is the lack of adequate spatial information. Any duplicate water wells that have been identified within the County have been removed from the database used in this regional groundwater assessment.

The AENV groundwater database uses an area-land-based system with only a limited number of records having a value for ground elevation. The locations for records usually include a quarter section description; a few records also have a land description that includes a Legal Subdivision (Lsd). For digital processing, a record location requires a horizontal coordinate system. In the absence of an actual location for a record, the record is given the coordinates for the centre of the land description.

The present project uses the 10TM coordinate system based on the NAD27 datum. This means that a record for the NE ¼ of section 18, township 044, range 24, W4M would have a horizontal coordinate with an Easting of 103,344 metres and a Northing of 5,848,510 metres, the centre of the quarter section. If the water well has been repositioned by AAFC-PFRA using orthorectified aerial photographs, the location will be more accurate, possibly within several tens of metres of the actual location. Once the horizontal coordinates are determined for a record, a ground elevation for that record is obtained from the 1:20,000 Digital Elevation Model (DEM); AltaLIS Ltd. provides the DEM.

At many locations within the County, more than one water well is completed at one legal location. Digitally processing this information is difficult. To obtain a better understanding of the completed depths of water wells, a digital surface was prepared representing the minimum depth for water wells and a second digital surface was prepared for the maximum depth. Both of these surfaces are used in the groundwater query on the CD-ROM. When the maximum and minimum water well depths are similar, there is only one aquifer that is being used at a given location.


After assigning spatial control for the ground location for the records in the groundwater database, the data are processed to determine values for hydrogeological parameters. As part of the processing, obvious keying errors in the database are corrected.

<sup>12</sup> Since 1986, Alberta Health and Wellness has restricted access to chemical analysis data, and hence the database includes only limited amounts of chemical data after 1986.

Where possible, determinations are made from individual records in order to assign water wells to aquifers and to obtain values for the following:

- 1) depth to bedrock
- 2) total thickness of sand and gravel below 15 metres
- 3) total thickness of saturated sand and gravel
- 4) depth to the top and bottom of completion intervals<sup>13</sup>.

Also, where sufficient information is available, values for apparent transmissivity<sup>14</sup> and apparent yield<sup>15</sup> are calculated, based on the aquifer test summary data supplied on the water well drilling reports. Where valid detailed aquifer test results exist, the interpreted data provide values for aquifer transmissivity and effective transmissivity. Since the last regional hydrogeological maps covering at least a part of the County were published in 1971 (Tokarsky, 1971; LeBreton, 1971), 2,790 values for apparent transmissivity and 2,375 values for apparent yield have been added to the groundwater database. The median

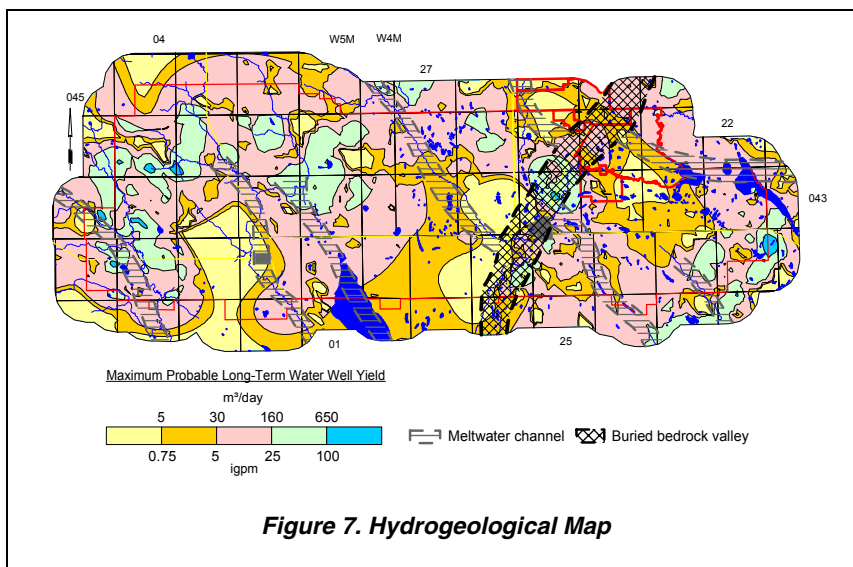

**Figure 7. Hydrogeological Map**

apparent yield of the water wells with apparent yield values is 62 m<sup>3</sup>/day. Approximately 11% of the apparent yield values for these water wells are less than ten m<sup>3</sup>/day. With the addition of the apparent yield values, including a 0.1-m<sup>3</sup>/day value assigned to “dry” water wells and water test holes, a hydrogeological map has been prepared to help illustrate the general groundwater availability across the County (Figure 7 and page A-11). The map is based on groundwater being obtained from all aquifers and has been prepared to allow direct comparison with the results provided on the Alberta Research Council (ARC) hydrogeological maps. In general, the ARC map shows higher estimated long-term yields. The differences between the two maps may be a result of fewer apparent yield values and the gridding method employed by ARC.

The EUB well database includes records for all of the wells drilled by the oil and gas industry. The information from this source includes:

- 1) spatial control for each well site
- 2) depth to the top of various geologic units
- 3) type and intervals for various down-hole geophysical logs
- 4) drill stem test (DST) summaries.

Values for apparent transmissivity and apparent yield are calculated from the DST summaries.

Published and unpublished reports and maps provide the final source of information to be included in the new groundwater database. The reference section of this report lists the available reports. The only digital data from publications are from the Geological Atlas of the Western Canada Sedimentary Basin (Mossop and Shetsen, 1994). These data are used to support the geological interpretation of geophysical logs but cannot be distributed because of a licensing agreement.

<sup>13</sup> See glossary

<sup>14</sup> For definitions of Transmissivity, see glossary

<sup>15</sup> For definitions of Yield, see glossary

## Spatial Distribution of Aquifers

Determination of the spatial distribution of the aquifers is based on:

- 1) lithologs provided by the water well drillers
- 2) geophysical logs from structure test holes
- 3) geophysical logs for wells drilled by the oil and gas industry
- 4) data from existing cross-sections.

The aquifers are defined by mapping the tops and bottoms of individual geologic units. The values for the elevation of the top and bottom of individual geologic units at specific locations help to determine the spatial distribution of the individual surfaces. Establishment of a surface distribution digitally requires preparation of a grid. The inconsistent quality of the data necessitates creating a representative sample set obtained from the entire data set. If the data set is large enough, it can be treated as a normal population and the removal of extreme values can be done statistically. When data sets are small, the process of data reduction involves a more direct assessment of the quality of individual points. Because of the uneven distribution of the data, all data sets are gridded using the Kriging method.

The final definition of the individual surfaces becomes an iterative process involving the plotting of the surfaces on cross-sections and the adjusting of control points to fit with the surrounding data.

### 4.2 Hydrogeological Parameters

Water well records that indicate the depths to the top and bottom of their completion interval are compared digitally to the spatial distribution of the various geological surfaces. This procedure allows for the determination of the aquifer in which individual water wells are completed. When the completion depth of a water well cannot be established, the data from that water well are not used in determining the distribution of hydraulic parameters.

After the water wells are assigned to a specific aquifer, the parameters from the water well records are assigned to the individual aquifers. The parameters include non-pumping (static) water level (NPWL), apparent transmissivity, and apparent water well yield. The NPWL given on the water well record is usually the water level recorded when the water well was drilled, measured prior to the initial aquifer test. In areas where groundwater levels have since fallen, the NPWL may now be lower and accordingly, potential apparent yield would be reduced. The total dissolved solids, sulfate and chloride concentrations from the chemical analyses of the groundwaters are also assigned to applicable aquifers. In addition, chemical parameters of nitrate + nitrite (as N) are assigned to surficial aquifers and fluoride is assigned to upper bedrock aquifer(s).

Once the values for the various parameters of the individual aquifers are established, the spatial distribution of these parameters must be determined. The distribution of individual parameters involves the same process as the distribution of geological surfaces. This means establishing a representative data set and then preparing a grid. The representative data set included using the available data from townships 041 to 044, ranges 22 to 28, W4M and township 041 to 045, ranges 01 to 05, W5M, plus a buffer area of at least 5,000 metres. Even when only limited data are available, grids are prepared. However, the grids prepared from the limited data must be used with extreme caution because the gridding process can be unreliable; for the maps, the areas with little or no data are identified.

On some maps, values are posted as a way of showing anomalies to the underlying grid or as a means of emphasizing either the lack of sufficient data or areas where there is concentrated hydrogeological data control.

### 4.3 Maps and Cross-Sections

Once grids for geological surfaces have been prepared, various grids need to be combined to establish the extent and thickness of individual geologic units. For example, the relationship between an upper bedrock unit and the bedrock surface must be determined. This process provides both the outline and the thickness of the geologic unit.

Once the appropriate grids are available, the maps are prepared by contouring the grids. For the upper bedrock aquifer(s) where areas of sufficient data are not available from the groundwater database, prepared maps have been masked with a solid faded pink color to indicate these areas. These masks have been added to the Lacombe, Scollard and Upper Horseshoe Canyon aquifers. Appendix A includes page-size maps from the text, plus additional page-size maps and figures that support the discussion in the text. A list of maps and figures that are included on the CD-ROM is given in Appendix B.

Cross-sections are prepared by first choosing control points from the database along preferred lines of section. Data from these control points are then obtained from the database and placed in an AutoCAD drawing with an appropriate vertical exaggeration. The data placed in the AutoCAD drawing include the geo-referenced lithology, completion intervals and non-pumping water levels. Data from individual geologic units are then transferred to the cross-section from the digitally prepared surfaces.

Once the technical details of a cross-section are correct, the drawing file is moved to the software package CorelDraw! for simplification and presentation in a hard-copy form. Eight cross-sections are presented in Appendix A of this report and as poster-size drawings forwarded with this report; only two (G-G' and H-H') are included in the text of this report. The cross-sections are also included on the CD-ROM; page-size maps of the poster-size cross-sections are included in Appendix D of this report.

### 4.4 Software

The files on the CD-ROM have been generated from the following software:

- Acrobat 5.0
- ArcView 3.2
- AutoCAD 2002
- CorelDraw! 11.0
- Microsoft Office XP
- Surfer 8