


Equipment Spacing for Well Servicing Conventional Wells

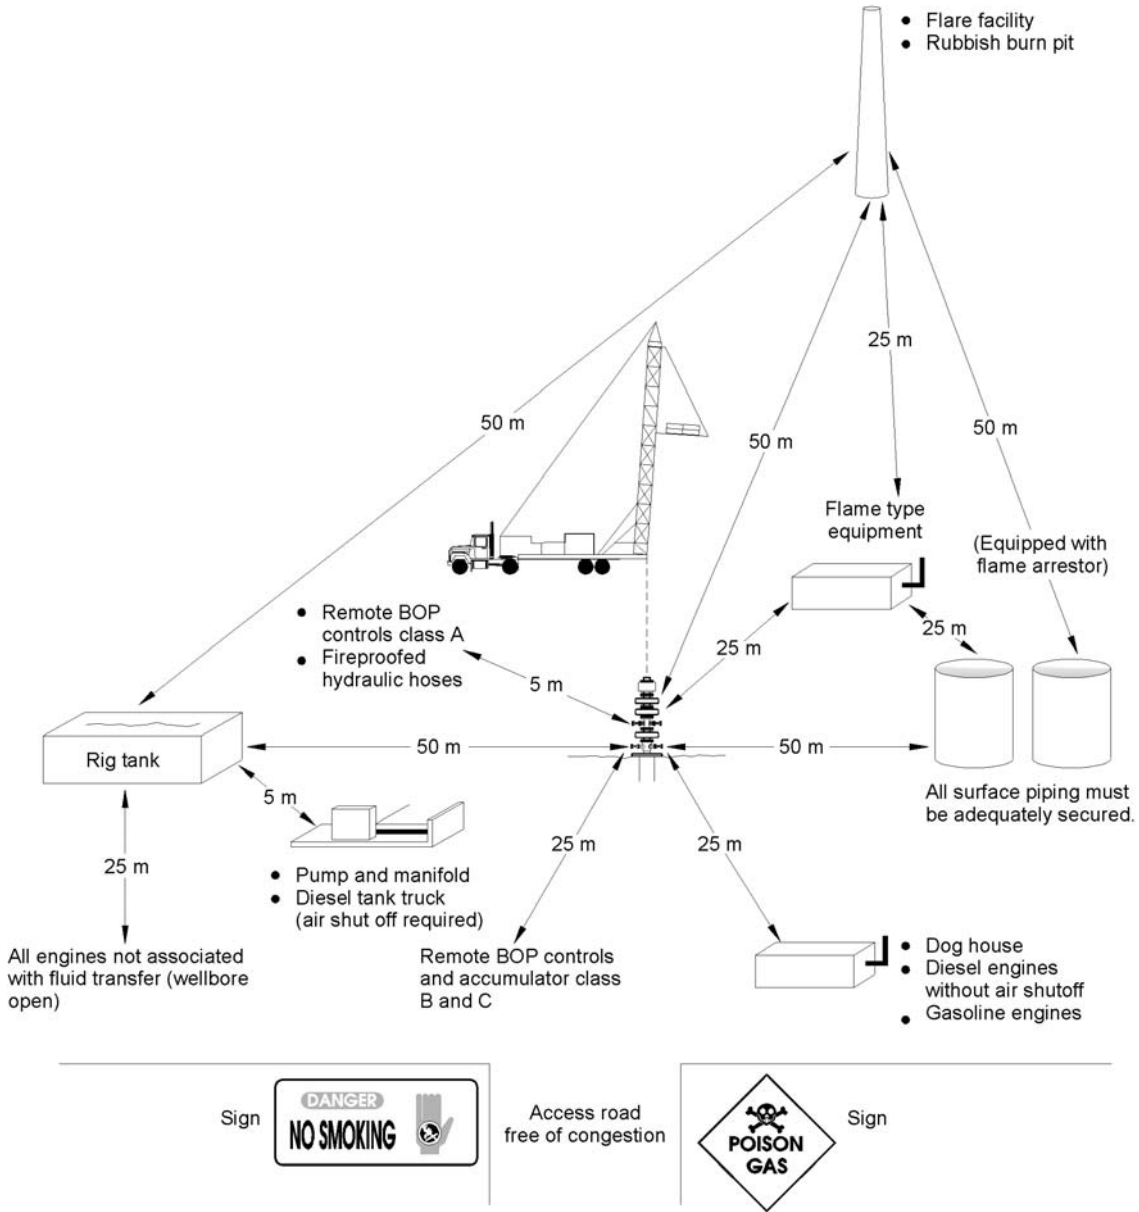

Notes: All distances shown are minimum distances.

A flare pit or the end of a flare line must not be located or remain nearer than 80 m from any right of way, easement of any road allowance, public utility or building. (*Drilling and Production Regulation 65(c)(ii)*)

A blackened area, free of vegetation and with a radius of at least 1.5 times the stack height, must be maintained around the base of the flare stack or the end of a flare line to the following minimum distances:

- (i) 10 m in cultivated areas, and
- (ii) 30 m in forested areas. (*Drilling and Production Regulation 65(n)*)