

Unit 1

Audio console

Innovason SY 80
 64 mic/line inp+16 line
 48 output whit process
 + 16 output without
 process + 4 AES-EBU
 outputs

Intercoms

.MCCURDY 9600, 50 x 60, programmable
 .2 intercoms Telex Rts BTR 800 whit
 4 "Belt pack" each
 .Interface RTS, 12 channels, 12 units
 .Interface CLEAR COM/RTS, 2 channels
 RTS (IFB) 8 belt pack
 .5 box of commentator whit
 head set HDM 25

Peripheral

1 Tascam 122 MK II
 2 Digicart II
 1 DAT TASCAM DA-60
 2 YAMAHA SPX 1000 audio processor
 1 LEXICON 200 digital reverberator
 1 CD player
 1 mini disc recorder Tascam MD 3001
 2 DOUBLES HYBRIDS PHONES

CAMERAS

7 SONY Cameras (possibility of 12)
 . 5 SONY BVP370 CCD studio cameras
 . 2 SONY BVP70 CCDhand camera
 . 1 Canon 86x9.3 mn lens
 . 5 FUJINON 55 x 9.5 mn lenses
 . 1 FUJINON 20 x 8 mn lens
 . 2 FUJINON 18x8 mn lenses
 Heads and tripods are includes

VTR

(possibility of 7)
 . 4 of ½ " BVW-75 SP
 1 evs 2 channel disk recorder
 . 2 vtr VHS
 . 2 Quad
 4 DEJAVIEW
 . 1 DVD burner
 . 1 DVD player

Video production

1 Grass Valley Digital Video Switcher Model 3000-3

- . 4 mix effects
- . 8 keys levels
- . 56 video and key inputs
- . 48 input selection pushbuttons with shiht mode
- . 10 auxiliary buses
- . 2 frame stores

1 HORIZON 32 x 32 Routing switcher

- . 32 configurables video / audio 1 / audio 2 input
- . 32 configurables output aux. buses video / audio 1 and 2

2 Portable control panels(5 available on request)

7 LEITCH synchronizers

4 DPS Color corrector and time base

1 DPS time base

1 phaser multipurpose Leitch DPS 575

Video production

1 DVE DEVEOUS

- . 4 channels

1 Chyron Infnit character generator 060

- video input,image tool, 128 mg,transform 2,SCSI EXPRESS 9 Gig
- 3 extended frame buffer (CCFB),BERNOUILLI 230 M,JAZZ 2 Gig.
- 1 Zip 250 mb

1 LEITCH still file - 2 channels


- . 1500 field capacity with all options (including 1 cassette streamer
 with capacity of 750 stills in field mode and 1 opto disk player
 with capacity of 3000 stills in field mode)

1 RF cable system (including 8 RF modulators audio/video)

6 Tuners audio / video

3 D TO A CONVERTER

1 A TO D CONVERTER

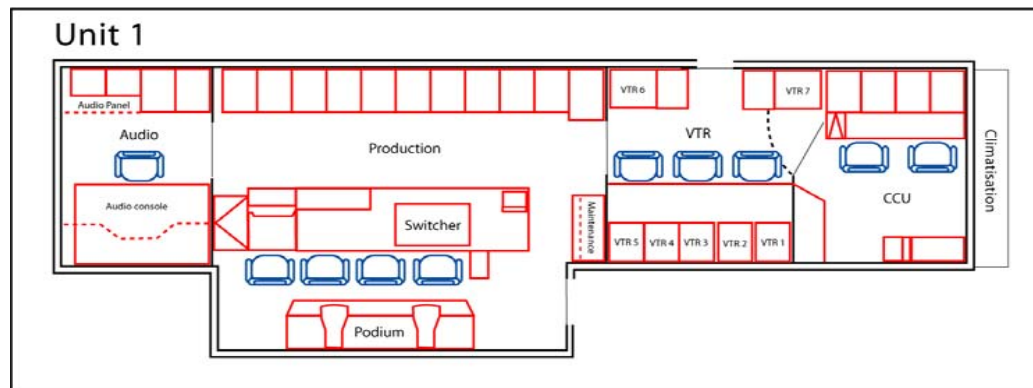

ELECTRICAL INLETS:
 3 x 208/240 volts on" CAMLOCK"
 Maximum consumption of 45 KW

Weight: 87,577lb/39,700 kg
 length:50' / 15.24 metre
 width:14'6" / 4.42 metre with expendo
 Height: 13'3" / 4.03 metre