

Purchase
Information

Information
pour
acheter

Titles
Titres

←
Article

→
Article



**Geological Survey
of Canada**

**CURRENT RESEARCH
2001-C3**

***Porosity characteristics of mineralized and
nonmineralized rocks from the Yellowknife
mining district, Northwest Territories***

N. Scromeda-Perez and S. Connell



Natural Resources
Canada

Resources naturelles
Canada

Canada



©Her Majesty the Queen in Right of Canada, 2001

Available in Canada from the
Geological Survey of Canada Bookstore website at:
<http://www.nrcan.gc.ca/gsc/bookstore> (Toll-free: 1-888-252-4301)

A copy of this publication is also available for reference by depository
libraries across Canada through access to the Depository Services Program's
website at <http://dsp-psd.pwgsc.gc.ca>

Price subject to change without notice

All requests for permission to reproduce this work, in whole or in part, for purposes of commercial use, resale, or redistribution shall be addressed to: Earth Sciences Sector Information Division, Room 200, 601 Booth Street, Ottawa, Ontario K1A 0E8.



Porosity characteristics of mineralized and nonmineralized rocks from the Yellowknife mining district, Northwest Territories

N. Scromeda-Perez and S. Connell

Mineral Resources Division, Ottawa

Scromeda-Perez, N. and Connell, S., 2001: Porosity characteristics of mineralized and nonmineralized rocks from the Yellowknife mining district, Northwest Territories; Geological Survey of Canada, Current Research 2001-C3, 7 p.

Abstract

Effective porosity measurements were performed on a suite of 17 samples from the Yellowknife mining district, Northwest Territories. The samples include massive flow, mafic volcanic flow, metagabbro, and talc-chlorite schist. The purpose of this study is to provide basic data to be used in the determination of petrophysical characteristics and electrical conductivity mechanisms of these rocks. The porosity data, when accompanied by other petrophysical measurements, can be used in the development of exploration strategies for aiding interpretation of downhole, ground, and electromagnetic surveys. This paper documents the results and describes the methods and processes used to obtain these porosity data.

Results indicate that bulk density (δ_B) and effective porosity (ϕ_E) values are in the ranges of 2.70 to 3.05 g/mL and 0.19 to 2.77%, respectively, for these samples. Massive flow, mafic volcanic flow, talc-chlorite schist, and metagabbro samples have porosity ranges of 0.19 to 0.39%, 0.27 to 2.60%, 0.45 to 0.75%, and 0.67 to 2.77% respectively.



Résumé

On a mesuré la porosité réelle de 17 échantillons provenant du district minier de Yellowknife (Territoires du Nord-Ouest). Les échantillons comprennent des coulées massives, des coulées volcaniques mafiques, du métagabbro et du schiste à talc et chlorite. Le but de cette étude est de fournir des données de base qui seront employées pour déterminer les caractéristiques pétrophysiques et les mécanismes de conductivité électrique de ces roches. Les données de porosité, lorsqu'elles sont accompagnées d'autres mesures pétrophysiques, peuvent servir à élaborer des stratégies d'exploration visant à faciliter l'interprétation des levés de forage, des levés terrestres et des levés électromagnétiques. L'article présente les résultats obtenus et décrit les méthodes et procédés appliqués pour recueillir ces données de porosité.

Les résultats indiquent que les valeurs de la densité apparente (δ_p) et de la porosité réelle (ϕ_p) de ces échantillons oscillent respectivement entre 2,70 et 3,05 g/mL et entre 0,19 et 2,77 %. Les intervalles de porosité dans les échantillons de coulées massives, de coulées volcaniques mafiques, de schiste à talc et chlorite et de métagabbro sont respectivement de 0,19 à 0,39 p. 100, de 0,27 à 2,60 p. 100, de 0,45 à 0,75 p. 100, et de 0,67 à 2,77 p. 100.

INTRODUCTION

Effective porosity measurements were performed on a suite of 17 samples from the Yellowknife mining district, Northwest Territories. The purpose of this study is to provide basic data to be used in the determination of petrophysical characteristics and electrical conductivity mechanisms of these rocks. The porosity data, when accompanied by other petrophysical measurements including electrical resistivity and bulk density, will be used in the development of exploration strategies for aiding interpretation of downhole, ground, and electromagnetic surveys. The samples include massive flow, mafic volcanic flow,



metagabbro, and talc-chlorite schist. This paper describes the methods and processes used to obtain the porosity data and documents the results in as much detail as considered necessary for subsequent studies.

METHOD OF INVESTIGATION

Samples and sample preparation

The 17 samples used in this study were collected by Jonathan Mwenifumbo (GSC-Ottawa) from drillhole S2141 in the Yellowknife mining district, Northwest Territories. Each sample consists of a 4 cm diameter core section of up to approximately 20 cm in length. The samples were chosen on the basis of rock type (for accurate background rock characterization) and anomalous geophysical signatures. Information on sample depth and type is listed in **Table 1**.

For clarification purposes, a 'sample' herein is a section of core obtained for various analyses. A 'specimen' is a section of material cut from a sample to be analyzed. Usually more than one specimen is cut from each sample to isolate any heterogeneities present in each section of core. Rectangular and/or partial disc specimens are used for the determination of bulk density (δ_b) and one specimen is used for the determination of effective porosity (ϕ_e) whenever possible. Samples with a high sulphide content are not used for the porosity determination because of concern over their possible oxidation under moist conditions at elevated temperatures (100°C). In this study, 22 specimens were used for effective porosity measurements.



Bulk density and effective porosity measurements

The caliper method (American Petroleum Institute, 1960) has been used to determine the bulk density (δ_b) of samples by measuring the dimensions and weight of the rectangular and partial disc specimens. This measurement constitutes part of the porosity-determining procedure. In principle, effective porosity (ϕ_E) represents the pore volume of all interconnected pores. In this study, it is determined from the difference in weight between an oven-dried and water-saturated rock specimen. The American Petroleum Institute (1960) recommended practice for core-analysis procedures has generally been followed in these measurements. The procedures routinely used in our measurements are described in the literature (e.g. Katsube and Scromeda, 1991; Katsube et al., 1992; Scromeda and Katsube, 1994).

EXPERIMENTAL RESULTS

The results of the bulk density determinations and effective porosity measurements are listed in **Table 2**. The bulk density values are in the range of 2.70 to 3.05 g/mL and the effective porosity values are in the range of 0.19 to 2.77%. Two anomalously high effective porosity values were found, one for a mafic volcanic flow sample (MYI-2; $\phi_E = 2.60\%$) and another for a metagabbro sample (MYI-9; $\phi_E = 2.77\%$). In general, the massive flow samples seem to have lower effective porosity values than the mafic volcanic flow samples. The results of the effective porosity measurements are shown in **Figures 1a** and **b**. Figure 1a presents effective porosity versus depth for the different rock types. Figure 1b, a histogram, presents effective porosity distribution patterns for the different rock types.



DISCUSSIONS AND CONCLUSIONS

The bulk density and effective porosity values of these samples are in the ranges of 2.70 to 3.05 g/mL and 0.19 to 2.77%, respectively. The higher bulk density values are similar to those of basic rocks and the lower ones, to those of sedimentary rocks (Daly et al., 1966). The lower effective porosity values are typical of crystalline rocks (Katsube and Mareschal, 1993; Katsube and Scromeda, 1995). Three samples (MYI-2, MYI-9, and MYI-15) show anomalously high effective porosity values that are similar to those of tight sedimentary rocks (Daly et al., 1966). For the most part, samples with higher porosities have lower bulk densities, as would be expected. However, two exceptions were found. Samples MYI-2A and MYI-9 both have higher porosities and higher bulk densities (2.60%, 2.70g/mL and 2.77%, 2.78 g/mL respectively) when compared to the others. Sample MYI-9, a metagabbro, has a pitted surface and contains carbonate residues that may have dissolved upon saturation of the porosity specimen. This could account for the higher effective porosity value of 2.77%. Sample MYI-2 is from a mafic volcanic flow, for which samples show generally high effective porosity values (**Fig. 1b**). In contrast to the mafic volcanic flow, which shows an effective porosity distribution of 0.27% to 2.60% (**Table 2**), with a mode of 0.50% (Fig. 1b), the massive flow shows an effective porosity distribution of 0.19% to 0.93% (Table 2), with a mode of 0.20% (Fig. 1b). Further studies are underway to determine the quantitative relationship between the mineralogy and the physical properties, such as electrical resistivity and scanning electron microscope analysis.



ACKNOWLEDGMENTS

The authors thank J. Mwenifumbo (Geological Survey of Canada) for providing the samples used in this study. The authors are grateful for the critical review of this paper and for the useful suggestions by T.J. Katsube (Geological Survey of Canada). This work has been supported by the EXTECH-III (Exploration Science and Technology) Project, which was initiated in 1999 in the Yellowknife mining district, Northwest Territories.

REFERENCES

American Petroleum Institute

1960: Recommended practices for core-analysis procedure: API Recommended Practice 40 (RP 40) (first edition); American Petroleum Institute, Washington, D.C., p.55.

Daly, R.A., Manger, E.G., and Clark, S.P., Jr.

1966: Density of rocks: section 4; *in* Handbook of Physical Constants; Geological Society of America, Memoir 97, p.19–26.

Katsube, T.J. and Mareschal, M.

1993: Petrophysical model of deep electrical conductors; graphite lining as a source and its disconnection due to uplift; *Journal of Geophysical Research*, v. 98, no. B5, p. 8019–8030.

Katsube, T.J. and Scromeda, N.

1991: Effective porosity measuring procedure for low porosity rocks; *in* Current Research, Part E; Geological Survey of Canada, Paper 91-E, p. 291–297.

1995: Accuracy of low porosity measurements in granite; *in* Current Research 1995-C; Geological Survey of Canada, p. 265–270.

Katsube, T.J., Scromeda, N., Mareschal, M., and Bailey, R.C.

1992: Electrical resistivity and porosity of crystalline rock samples from the Kapuskasing Structural Zone, Ontario; *in* Current Research, Part E; Geological Survey of Canada, Paper 92-1E, p. 225–236.



Scromeda, N. and Katsube, T.J.

1994: Effect of temperature on drying procedures used in porosity measurements of tight rocks; *in* Current Research 1994-E; Geological Survey of Canada, p. 283–289.

Geological Survey of Canada Project 870057

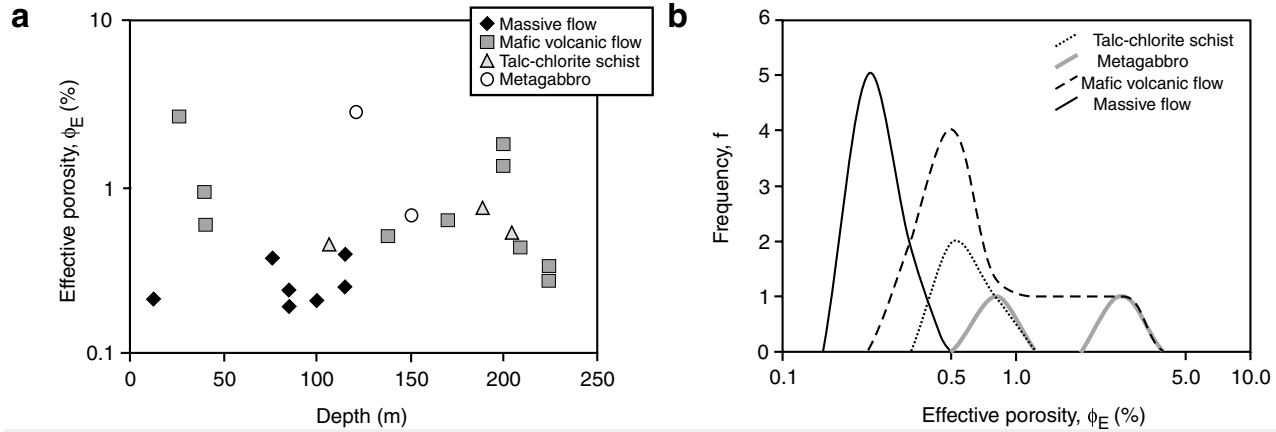


Figure 1. Effective porosity (ϕ_E) for the mineralized and nonmineralized samples; ϕ_E displayed **a)** as a function of depth and **b)** as a histogram.

